

# Location:




S-9601-P, S-9601-P-TRM, S9601PTRMTC  
Shower System or Trim  
**Specification Submittal**

| Feature Highlights  | Options/Modifications  |
|---|--|
| <ul style="list-style-type: none"> <li>Origins Shower System or Trim</li> <li>Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-P)</li> <li>Adjustable stop screw to limit handle turn (included with S-9601-P)</li> <li>Integral volume control</li> <li>Tri-star handle</li> <li>1 mode showerhead with easy to clean nozzles</li> <li>Diverter tub spout not included</li> <li>Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PTRMTC)</li> </ul> | <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li> <li><input type="checkbox"/> <b>L1</b> Less showerhead</li> <li><input type="checkbox"/> <b>L4</b> Less head, arm and flange</li> <li><input type="checkbox"/> <b>L7</b> Less handle</li> <li><input type="checkbox"/> <b>B</b> Brass escutcheon (chrome only)</li> <li><input type="checkbox"/> <b>X</b> Integral service stops - allows water shut-off at valve for service</li> </ul> <p><b>Note:</b> Append appropriate suffix to model number.</p>  |
| Model Numbers   | Compliance   |
| <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>S-9601-P</b><br/>Shower System with integral volume control &amp; Temptrol Pressure Balancing Shower Valve</li> <li><input type="checkbox"/> <b>S-9601-P-TRM</b><br/>Shower Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately</li> <li><input type="checkbox"/> <b>S9601PTRMTC</b><br/>Shower Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li> </ul>  | <p>ASME A112.18.1/CSA B125.1</p> <p>WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)</p> <div style="text-align: right;">   </div> <hr/> <h3>Warranty</h3> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>  |

## Architectural/ Engineering Specification

Symmons Museo \_\_\_\_\_ With Origins Shower System or Trim, Requires Temptrol® Pressure Balancing Shower Valve (included with S-9601-P), Adjustable stop screw to limit handle turn (included with S-9601-P), Integral volume control, Tri-star handle, 1 mode showerhead with easy to clean nozzles, Diverter tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S9601PTRMTC) 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L4 -Less head, arm and flange", "L7 - Less handle", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

## Dimensions

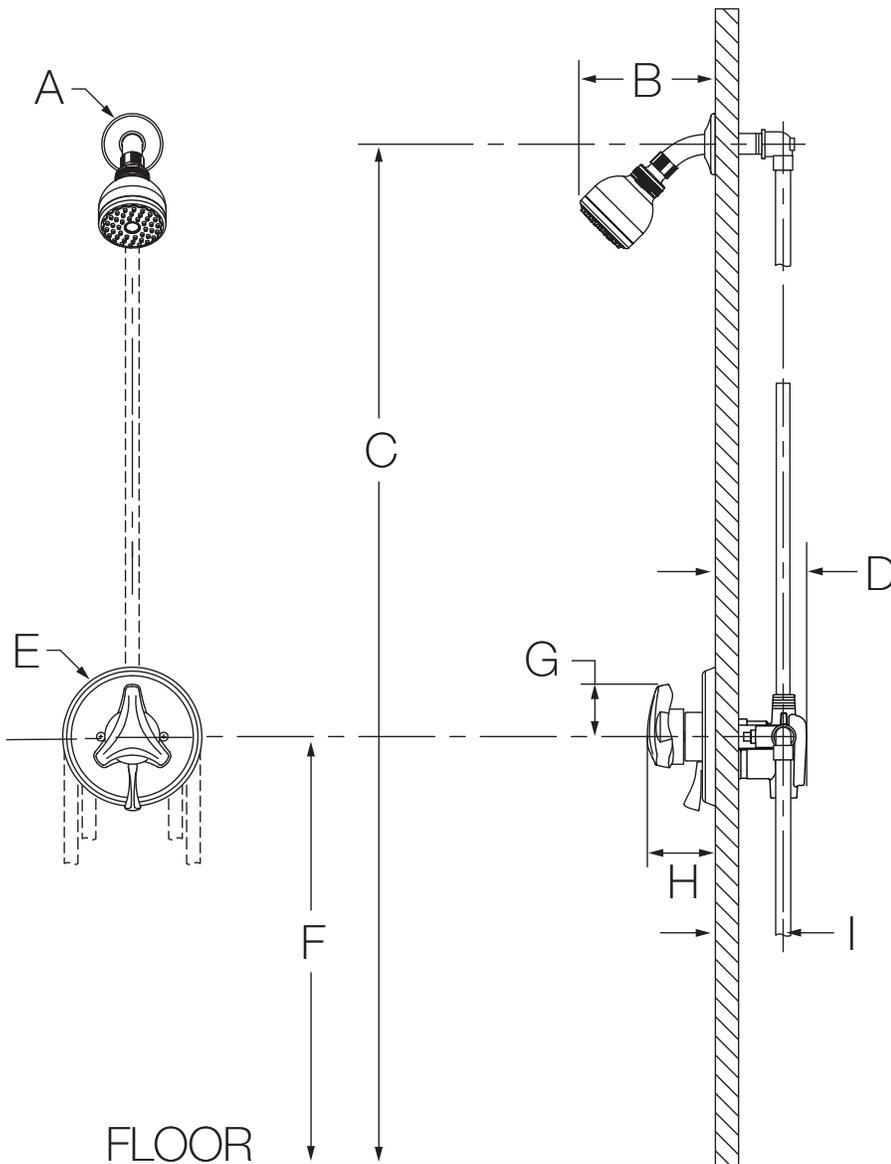

| Measurements |  |
|--------------|--|
| <b>A</b>     | Ø 2-1/2", 64 mm                          |
| <b>B</b>     | 6-3/8", 162 mm                           |
| <b>C</b>     | Ref. 77", 1956 mm                        |
| <b>D</b>     | 3-1/2", 89 mm                            |
| <b>E</b>     | Ø 5-3/4", 146 mm                         |
| <b>F</b>     | Ref. 42", 1067 mm                        |
| <b>G</b>     | 2-1/8", 54 mm                            |
| <b>H</b>     | 2-7/8", 73 mm                            |
| <b>I</b>     | Rough-in<br>2-3/8" ± 1/2", 60 mm ± 13 mm |

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.