

Specification Submittal



HR507 Location: 7-Mode Hand Shower

Model N	umbers	Feature Highlights				
☐ HR507 7-Mode HydroMersion® Hand Shower		 4" round 7-mode HydroMersion hand shower wand with Non-Positive Shutoff (NPSO). Wall cradle for hand shower wand mounting. 				
Options	/Modifications	60" flexible metal hose.Standard 2.0 gpm (7.6 L/min) flow restrictor.				
☐ 15 C C	1.5 gpm (5.7 L/min) flow restrictor	Shall be metal and nonmetal construction, plated in standard Polished Chrome finish.				
☐ BBZ	Brushed Bronze finish					
☐ MB	Matte Black finish					
☐ STN	Satin Nickel finish	Warranty				
☐ L2	Less hand shower	Limited Lifetime - for residential				
Compliance		installations. 10 Years - for commercial/industrial				
ASME A112.18.1/CSA B125.1.		installations. Refer to www.symmons.com/warran- ty for complete warranty information.				
Hand shower wand meets ADA re-						

SKU Builder

quirements for operation.


Series	Finish	Modifier	Flow Rate	Final SKU
HR507			15	HR50715
HR507	МВ	L2		HR507MBL2

Note: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons 7-Mode Hand Shower ______ Features 4" round 7-mode HydroMersion hand shower wand with NPSO, wall cradle for hand shower wand mounting, 60" flexible metal hose, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Hand shower wand meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish, and L2 = Less hand shower.

Dimensions

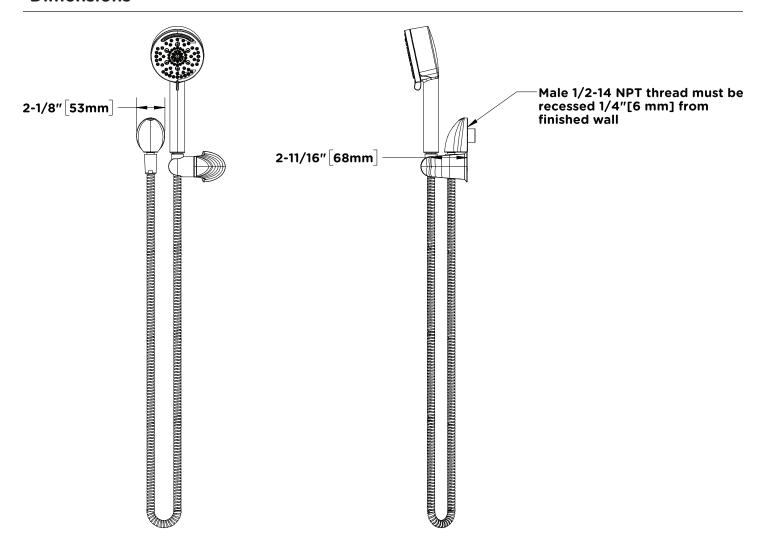

Note: Dimensions are subject to change without notice.