




**SYMMONS®** Dia®



3595BTRM  
Shower/Hand Shower Trim  
**Specification Submittal**

Location:

**Model Numbers**

- ☐ **3595BTRM**  
Shower/Hand Shower System Trim

**Valve Options:**

- 261 Series Temptrol® Shower Valve with TRM modifier
- 161 Series Temptrol Shower Valve requires TC modifier
- 2DIVBODYSRT Diverter Valve

**Feature Highlights**

- Dia Shower/Hand Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- 30" slide bar.
- Separate two-function diverter.
- Metal lever handle.
- 60" flexible metal hose.
- 7-mode HydroMersion™ hand shower with Non-Positive Shutoff (NPSO).
- 7-mode HydroMersion showerhead with Non-Positive Shutoff (NPSO).
- Dual check valves for backflow protection.
- Standard 2.0 gpm (7.6 L/min) flow restrictors.
- Components are made from metal and nonmetal materials plated in standard Polished Chrome finish.

**Compliance**

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation



**Modifications**

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **175** 1.75 gpm (6.6 L/min) flow restrictor
- ☐ **Delete Suffix B** Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower wand
- ☐ **L3** Less showerhead and hand shower wand
- ☐ **L4** Less showerhead, shower arm, and flange
- ☐ **L5** Less hand shower system (less bar/cradle, hose, wand, and elbow)
- ☐ **L7** Less handle
- ☐ **BBZ** Brushed Bronze finish
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish
- ☐ **1L** 1-Inch Spindle Extension
- ☐ **TC** Test Cap Trim (includes TA-10™ & T-12A) *used with 161 Series Temptrol Valve*

**Warranty**

**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



**SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3595B	MB	L1	175	TRM	TC		3595BMBL1175TRMTC
3595	BBZ	L7		TRM		1L	3595BBZL7TRM1L

**Notes:** No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

**Architectural/Engineering Specification**

Symmons Dia Shower and Hand Shower System \_\_\_\_\_ Includes Dia shower trim for Temptrol® Pressure-Balancing Shower Valve. Features 30" slide bar, 60" flexible metal hose, 7-mode HydroMersion hand shower with NPSO, 7-mode HydroMersion showerhead with NPSO, dual check valves for backflow protection and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead and hand shower wand, L4 = Less showerhead, shower arm, and flange, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, 1L = 1-Inch spindle extension, and TC = Test Cap Trim.

## Dimensions

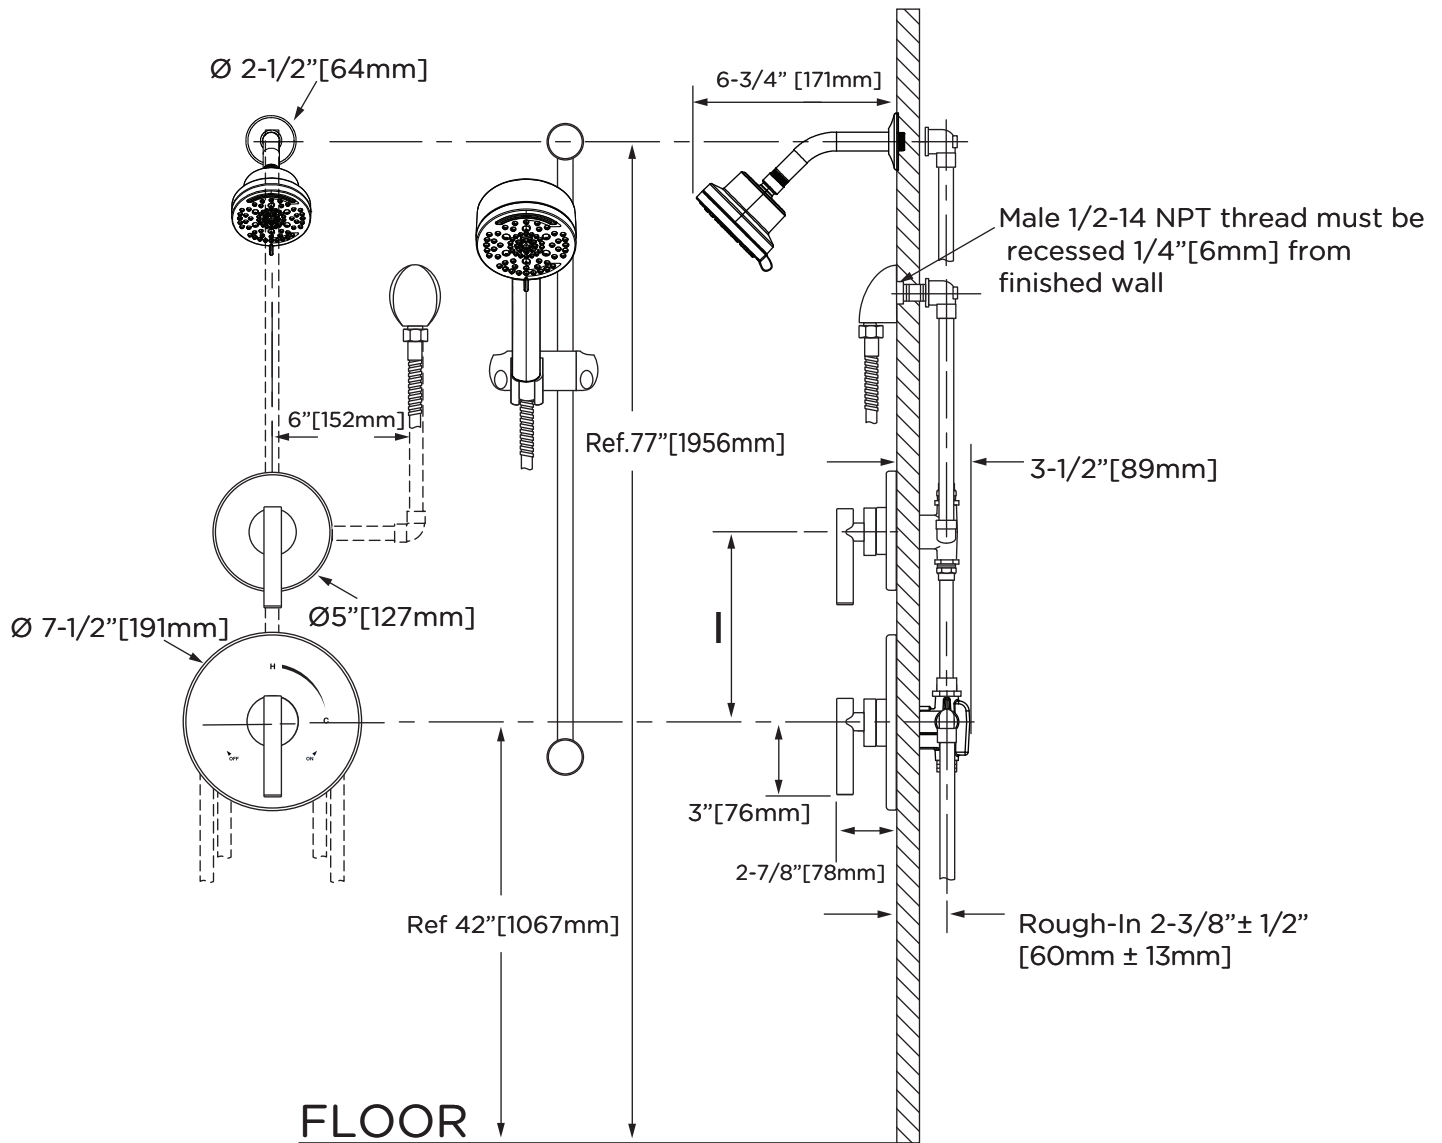

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.