

Location:



SLS3522 Single Handle Lavatory Faucet Specification Submittal




Model Numbers	Feature Highlights
☐ SLS3522 <i>Single Handle Lavatory Faucet with lift rod and metal drain assembly</i>	• Single hole mount configuration • Quarter turn ceramic cartridge • 25 inch braided hose water supply connections • 5" height • Lift rod and metal drain assembly • Standard 1.0 gpm (3.8 L/min) flow rate • Faucet shall be metal construction, plated in standard polished chrome finish
Finish Options/Modifications	Compliance
☐ DP4 <i>4" deck plate</i> ☐ G <i>Grid drain</i> ☐ BBZ <i>Brushed Bronze finish</i> ☐ MB <i>Matte Black finish</i> ☐ STN <i>Satin Nickel finish</i>	ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 WaterSense 1.0 gpm (3.8 L/min)  
Note: Append appropriate suffix to model number.	Warranty
	Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 

Architectural/ Engineering Specification

Symmons Single Handle Lavatory Faucet Dia _____ With single hole mount configuration, Quarter turn ceramic cartridge, 25 inch braided hose water supply connections, 5" height, Lift rod and metal drain assembly, standard 1.0 gpm (3.8 L/min) flow rate, faucet shall be metal construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense 1.0 gpm (3.8 L/min). complaint. Available options include: "05 - 0.5 gpm (1.9 L/min) flow restrictor", "10 - 1.0 gpm (3.8 L/min) flow restrictor", "DP4 4" deck plate", "G - Grid drain", BBZ Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

Dimensions

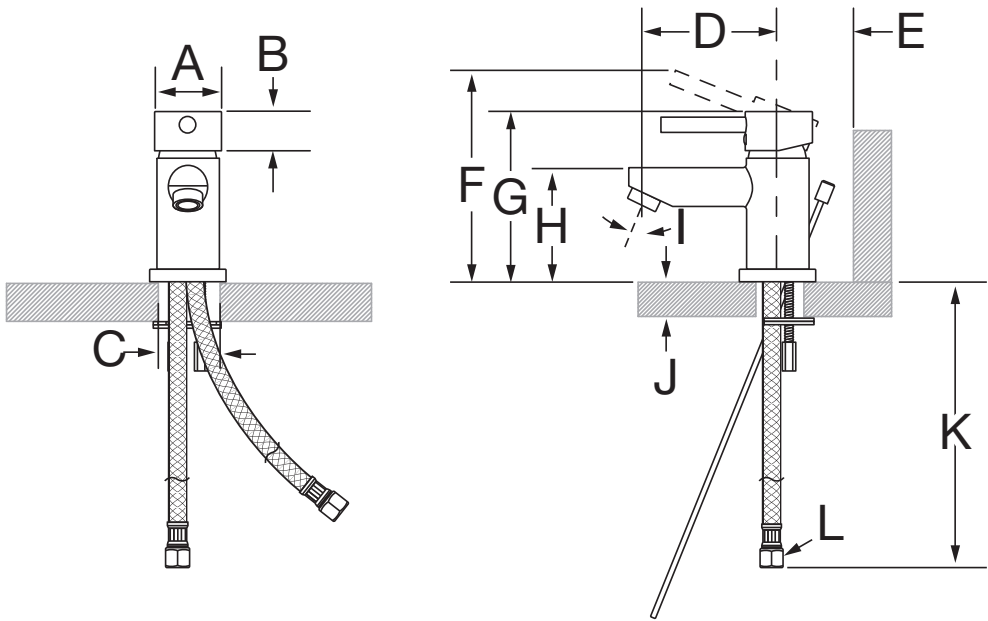

Measurements	
A	1-7/8", 48 mm
B	1-3/16", 30 mm
C	Hole Size Min. Ø 1-1/4", 32 mm Max. Ø 1-1/2", 38 mm
D	4-1/16", 103 mm
E	Min. 2-1/2", 64 mm
F	6-1/8", 155 mm
G	5", 127 mm
H	3-5/16", 84 mm
I	26°
J	Deck Thickness Ref. Min. 7/8", 22 mm Max. 1-7/8", 47 mm
K	25-7/8", 658 mm
L	3/8" compression fitting

Note: Dimensions subject to change without notice.