

6796TRM Location:

Single-mode HydroMersion[™] hand shower wand with Non-

Components shall be metal and nonmetal construction,

Tub/Shower/Hand Shower Trim

Specification Submittal

Model Numbers			Options/Modifications					
	6796TRM Tub/Shower/Hand Shower Trim		15 L1		1.5 gpm (5.7 L/min) flow restrictor Less showerhead			
	Valve Options: -261 Series Temptrol® Shower Valve with TMR modifier -161 Series Temptrol Shower Valve requires TC modifiers -3DIVBODYSRT Diverter Body, 4-Port		L: L:		Less hand shower wand Less showerhead and hand shower (head and wand only)			
			L.		Less head, arm, and flange Less hand shower system (less cradle, hose, wand, and elbow)			
Feature Highlights			L		Less handle			
•	Identity Tub/Shower/Hand Shower Trim. Requires Temptrol Pressure-Balancing Shower Valve. Separate three-function diverter. Metal lever handle. Cradle for hand shower wand.		T	С	Test Cap Trim (includes TA-10™ & T-12A) used with 161 Series Temptrol Shower Valve			
			В	ΒZ	Brushed Bronze finish			
			М	В	Matte Black finish			
•	Dual checks for backflow protection. 60" flexible metal hose. 5-1/8" slip-on tub spout.		S.	TN	Satin Nickel finish			

plated in standard Polished Chrome finish. Compliance

• ASME® A112.18.1/CSA® B125.1.

Positive Shutoff (NPSO).

Single-mode HydroMersion showerhead.

Standard 2.0 gpm (7.6 L/min) flow restrictors.

- WaterSense® 1.5 gpm (5.7 L/min)
 2.0 gpm (7.6 L/min).
- Lever handle and hand shower wand meets ADA requirements for operation.







Warranty

Limited Lifetime - for residential installations.

10 Years - for commercial/industrial installations.

Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
6796	МВ	L1		TRM	TC	6796MBL1TRMTC
6796	BBZ	L7	15	TRM		6796BBZL715TRM

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Identity Tub and Shower and Hand Shower Trim ______ Includes Identity Tub/Shower/Hand Shower Trim for Temptrol Pressure-Balancing Shower Valve. Separate three-function diverter. Features metal level handle, cradle for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 5-1/8" slip-on tub spout, single-mode HydroMersion hand shower wand with NPSO, single-mode HydroMersion showerhead, and stardard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, Water-Sense 1.5 gpm and 2.0 gpm compliant. Lever handle and hand shower wand meets ADA requirements for operation. Available options include: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead and hand shower wand, L4 = Less showerhead, shower arm, and flange, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

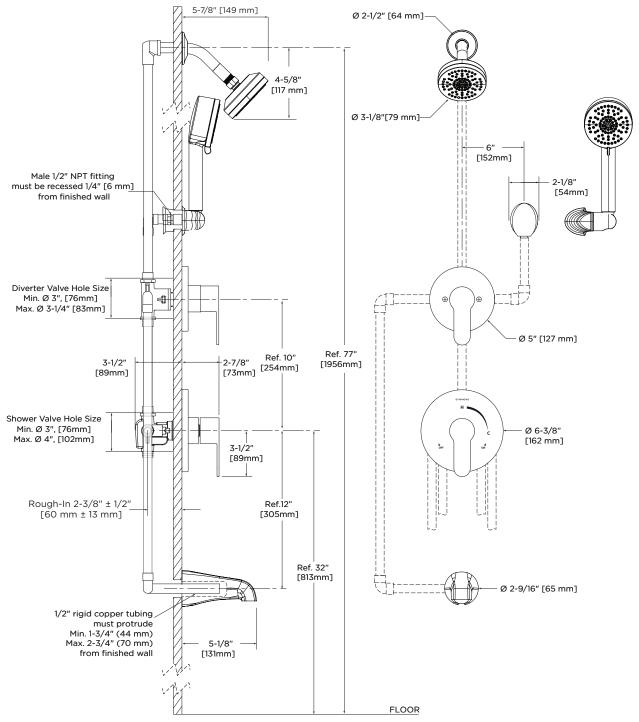

Notes

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.