






**SYMMONS<sup>®</sup> DIA<sup>™</sup>**




**FSTF357220**  
**Floor Standing Tub Filler**  
**Specification Submittal**

<p><b>Model Numbers</b></p> <p><input type="checkbox"/> <b>FSTF357220</b> <i>Floor standing tub filler</i></p>	<p><b>Feature Highlights</b></p> <ul style="list-style-type: none"> <li>• Ceramic cartridge</li> <li>• push button to divert from spout to hand shower</li> <li>• 60" flexible metal hose</li> <li>• 1 mode hand shower with dual check valves</li> <li>• 2.0 gpm (7.6 L/min) hand shower</li> <li>• Floor Standing Tub Filler shall be metal construction plated in standard polished chrome finish</li> <li>• 5.3 gpm (20.1 L/min) at 45 psi</li> <li>• 6.5 gpm (24.6 L/min) at 60 psi</li> </ul>
<p><b>Options/ Modifications</b></p> <p><input type="checkbox"/> <b>STN</b> <i>Satin nickel finish</i></p> <p><input type="checkbox"/> <b>MB</b> <i>Matte black finish</i></p> <p><input type="checkbox"/> <b>BBZ</b> <i>Brushed bronze finish</i></p> <p><b>Note:</b> Append appropriate -suffix to model number.</p>	<p><b>Warranty</b></p> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 
<p><b>Compliance</b></p> <p>- ASME A112.18.1          - CSA B125.1</p> 	

**Architectural/Engineering Specification**


Floor standing tub filler with ceramic cartridge and push button to divert from spout to hand shower. Includes 60" flexible metal hose, 1 mode hand shower with dual check valves and a 2.0 gpm (7.6L/min) hand shower. Modifications include "Satin nickel finish", "Matte black finish", and "Brushed bronze finish".

**Dimensions**

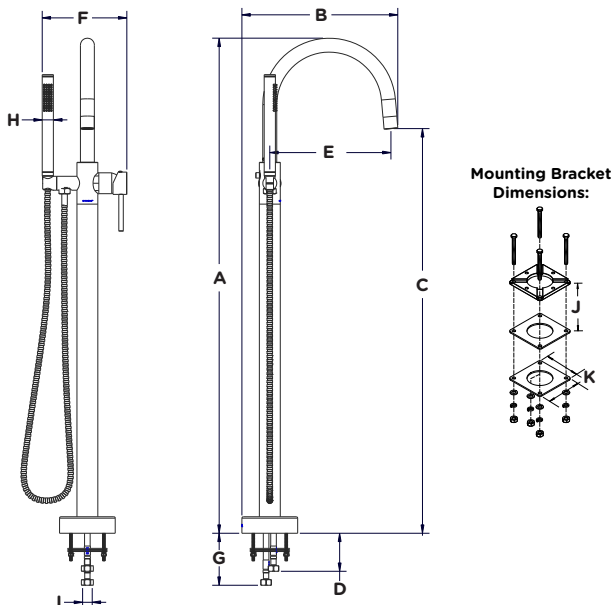


Measurements	
<b>A</b>	42", 1067mm
<b>B</b>	13-1/4", 336mm
<b>C</b>	34-3/8", 872mm
<b>D</b>	3-1/4", 82mm
<b>E</b>	10-1/4", 261mm
<b>F</b>	7-3/16", 182mm
<b>G</b>	4-1/2", 112mm
<b>H</b>	15/16", 24mm
<b>I</b>	2X1/2-14NPSM
<b>J</b>	1.25" MAX FLOOR THICKNESS, 25mm
<b>K</b>	2.75", 70mm



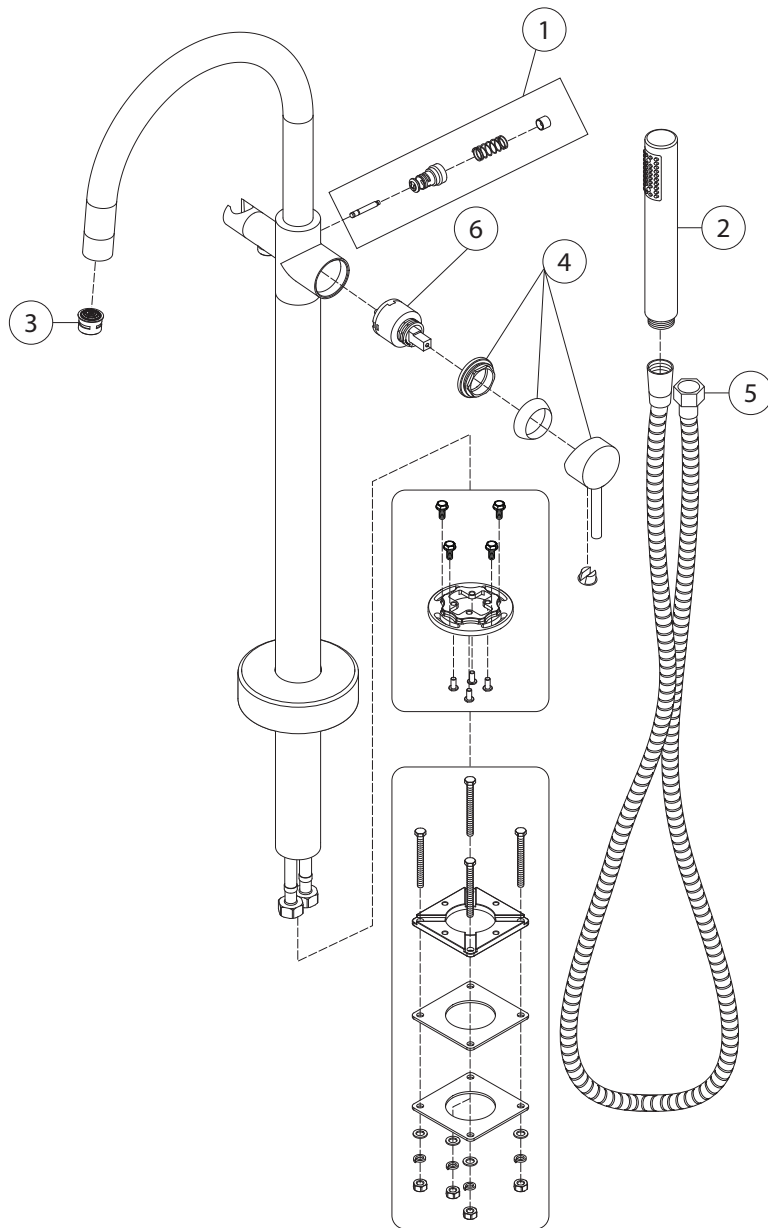



# Installation/Parts Breakdown

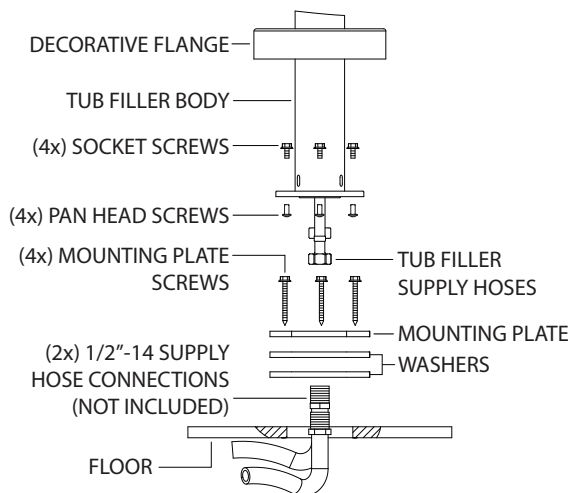

Item	Description	Part Number
1	Push Button Kit	RFST001*
2	Hand Shower	432W-2.0*
3	Stream Straightener	RT-05209
4	Handle Kit	RFST002*
5	60" Hose	RTS-045*
6	Cartridge	RT-05173

\*Note: Append -STN, -MB, or -BBZ to part number for premium finish.



Tools Required	
Adjustable Wrench	
Drill	
Phillips Head Screwdriver	
Plumber Tape	
Safety Glasses	
Silicone	

### Installation Notes:

- 1) Apply a bead of silicone around the perimeter of all faucet trim installed to deck surface.
- 2) Apply plumber tape to threaded connections as necessary. DO NOT use plumber tape on fittings with face seal washers or o-rings.
- 3) DO NOT OVERTIGHTEN fittings with face seal washers or o-rings.