

## Specification Submittal

Symmons Tub and Shower System with Hand Spray \_\_\_\_\_ Features Include Visu-Temp Pressure-Balancing mixing valve with integral thermometer and adjustable stop screw to limit handle turn, included tub spout, lever diverter with volume control for hand spray and tub spout, wall/hand shower with flexible 5' metal hose, in-line vacuum breaker, wall connection and flange, wall hook for hand shower mounting. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: X = Integral service stops—allows water shut-off at valve for service, X-3/4 = 3/4" valve to increase flow approximately 20%, 6 = 6' hose in place of standard 5' hose, B30 = 30" adjusting bar in place of wall hook.




**SYMMONS®** Visu-Temp®

1-50VT-FS

## Dimensions

Male 1/2" IPS thread must protrude 3/8" (10 mm) from finished wall for proper installation of street ell and flange.

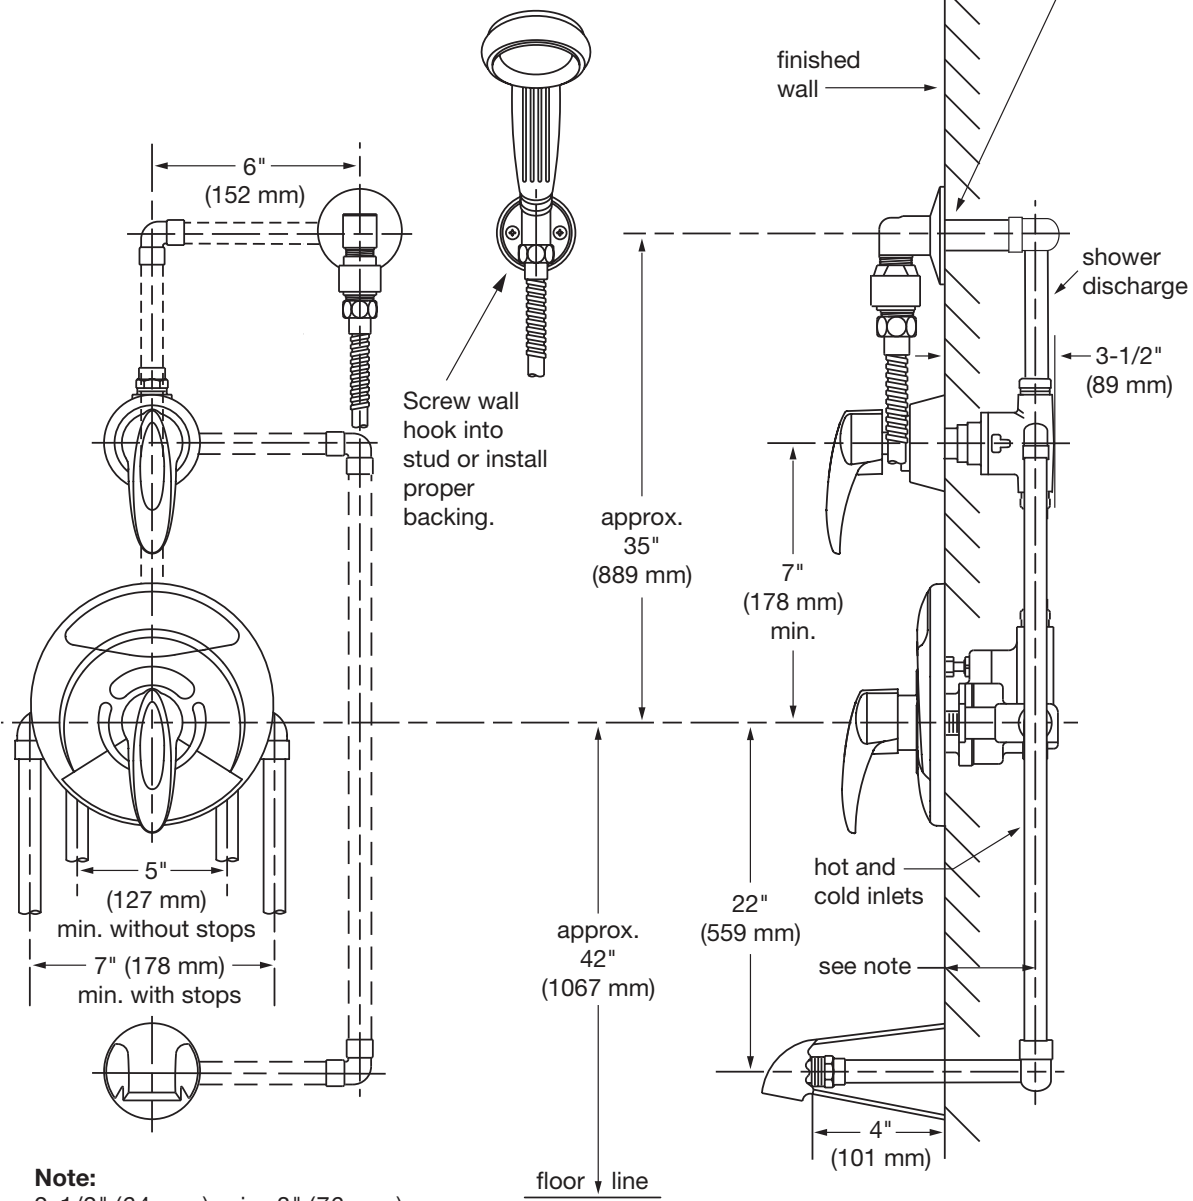

**Note:**

2-1/2" (64 mm) min. 3" (76 mm) max.  
On 2" x 4" construction, use  
2-1/2" (64 mm) min. rough-in. Valve  
inlets and outlets are 1/2" (13 mm) IPS  
connections.

**Note:** Dimensions subject to  
change without notice.