

Location:



SYMMONS® Origins[®]



9604-PLR, 9604-PLR-TRM, 9604PLR, 9604PLRTRM

Tub/Hand Shower Trim

Specification Submittal

Feature Highlights

- Origins Tub/Hand Shower System or Trim
- Requires Temptrol[®] Pressure Balancing Tub/Shower Valve (included with 9604-PLR)
- Adjustable stop screw to limit handle turn (included with 9604-PLR)
- Metal lever handle
- ADA 36" grab bar for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower wand with non-positive shutoff
- 2.0 gpm (7.6 L/min) flow restrictor
- 5-1/2" diverter tub spout
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9604PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers

- ☐ **9604-PLR**
Tub/Hand Shower Trim with Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- ☐ **9604PLR**
Tub/Hand Shower Trim with Temptrol Pressure Balancing Shower Valve (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- ☐ **9604-PLR-TRM**
Tub/Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- ☐ **9604PLRTRM**
Tub/Hand Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

Note:

-To create trim sku, follow the format:

Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM -> TC (If applicable)

-To create valve & trim sku, follow the format:

Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard)

-For B and REV modifications, contact customer service for your sku

Options/Modifications

- ☐ **-1.5** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **-1.75** 1.75 gpm (6.6 L/min) flow restrictor
- ☐ **-72** 72" hose in place of 60" hose
- ☐ **L2** Less hand shower (wand only)
- ☐ **L5** Less hend shower system (less bar, hose, wand and elbow)
- ☐ **L6** Less tub spout
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim
- ☐ **-CHKS** Integral check stops
- ☐ **-VP** Vandal resistant escutcheon screws in place of standard screws
- ☐ **-STN** Satin Nickel finish
- ☐ **-B** Brass escutcheon (chrome only)
- ☐ **-X** Integral service stops - allows water shut-off at valve for service

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)
- Buy American Act (9604-PLR only)



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




Architectural/ Engineering Specification

Symmons Origins _____ With Origins Tub/Hand Shower System or Trim, Requires Temptrol[®] Pressure Balancing Tub/Shower Valve (included with 9604-PLR), Adjustable stop screw to limit handle turn (included with 9604-PLR), Metal lever handle, ADA 36" grab bar for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower wand with non-positive shutoff, 2.0 gpm (7.6 L/min) flow restrictor, 5-1/2" diverter tub spout, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9604PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "72 - 72" hose in place of 60" hose", "L2 - Less hand shower (wand only)", "L5 - Less hend shower system (less bar, hose, wand and elbow)", "L7 - Less tub spout", "Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish". "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test Cap Trim".

9604-PLR, 9604-PLR-TRM, 9604PLR, 9604PLRTRM

Dimensions

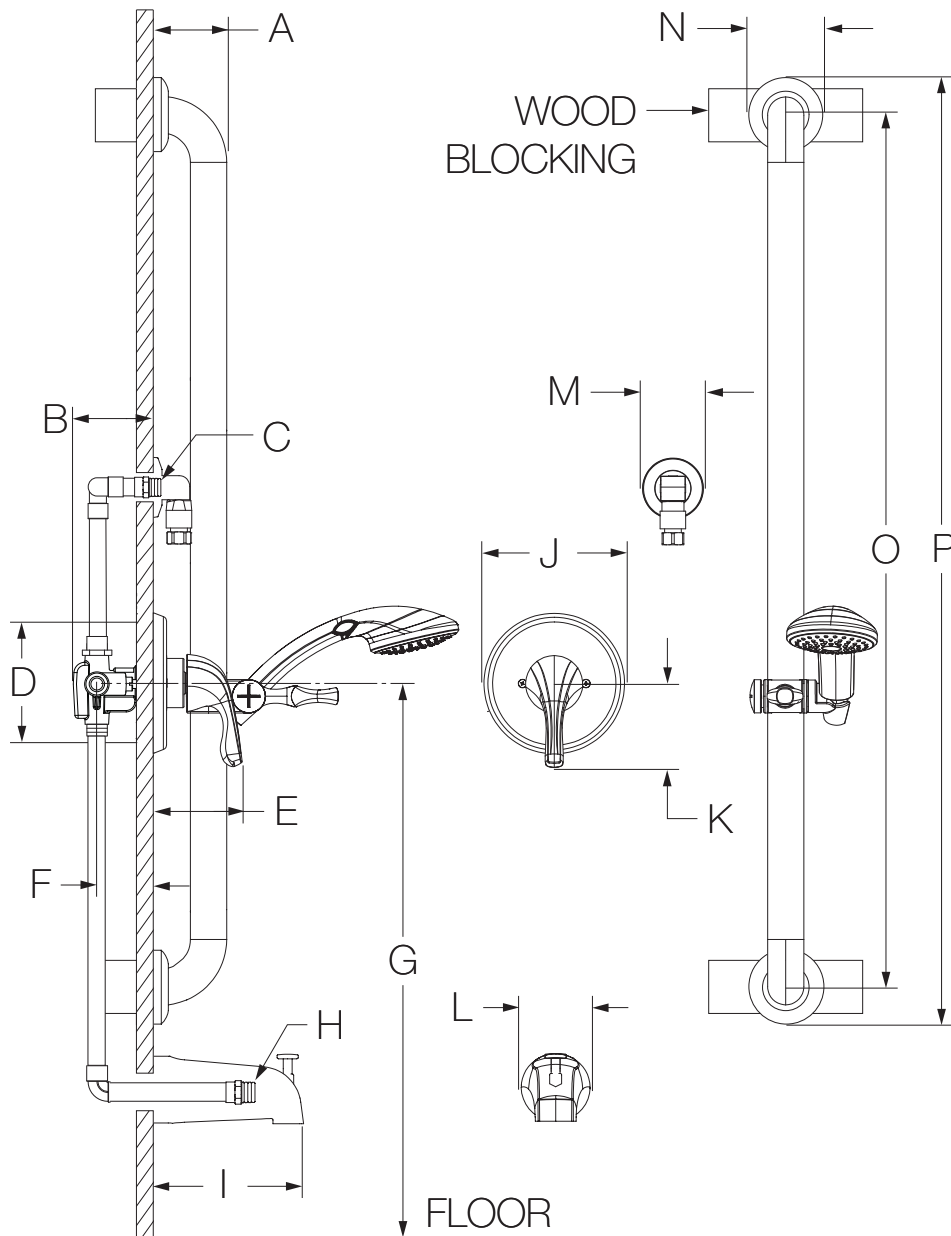

Measurements	
A	3", 76 mm
B	3-1/2", 89 mm
C	Male 1/2" NPT fitting must protrude 3/8" from finished wall
D	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
E	3-5/8", 92 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 32", 813 mm
H	Male 1/2" NPT thread must protrude 4" from finished wall
I	5-1/4", 133 mm
J	Ø 5-3/4", 146 mm
K	3-3/8", 86 mm
L	Ø 2-1/2", 64 mm
M	Ø 2-1/2", 64 mm
N	Ø 3-1/8", 79 mm
O	36", 914 mm
P	39", 991 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.