

SLS4912PP
Single Handle Lavatory Faucet
Specification Submittal

Model Numbers

- SLS4912PP** Single Handle Lavatory Faucet

Feature Highlights

Single Handle Lavatory Faucet for single hole mount shall include ceramic cartridge, braided supply hoses with 3/8" compression fittings, push pop drain assembly, Standard 1.0 gpm (3.8 L/min) flow rate. Single Handle Lavatory Faucet shall be metal construction, plated in standard Polished Chrome finish. Replacement for SLS1398PP.

Compliance

- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372
- ASME A112.18.1/CSA B125.1



Options/Modifications

- MB** Matte Black finish
- STN** Satin Nickel finish

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




SKU Builder

Series	Finish	PP	Final SKU
SLS4912	MB	PP	SLS4912MBPP

Architectural/Engineering Specification

Symmons Single handle lavatory faucet _____. With ceramic cartridge, braided supply hoses with 3/8" compression fittings, push pop drain assembly, Standard 1.0 gpm (3.8 L/min) flow rate. Single Handle Lavatory Faucet shall be metal construction, plated in standard Polished Chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "STN - Satin Nickel finish" and "MB - Matte Black finish".

Dimensions

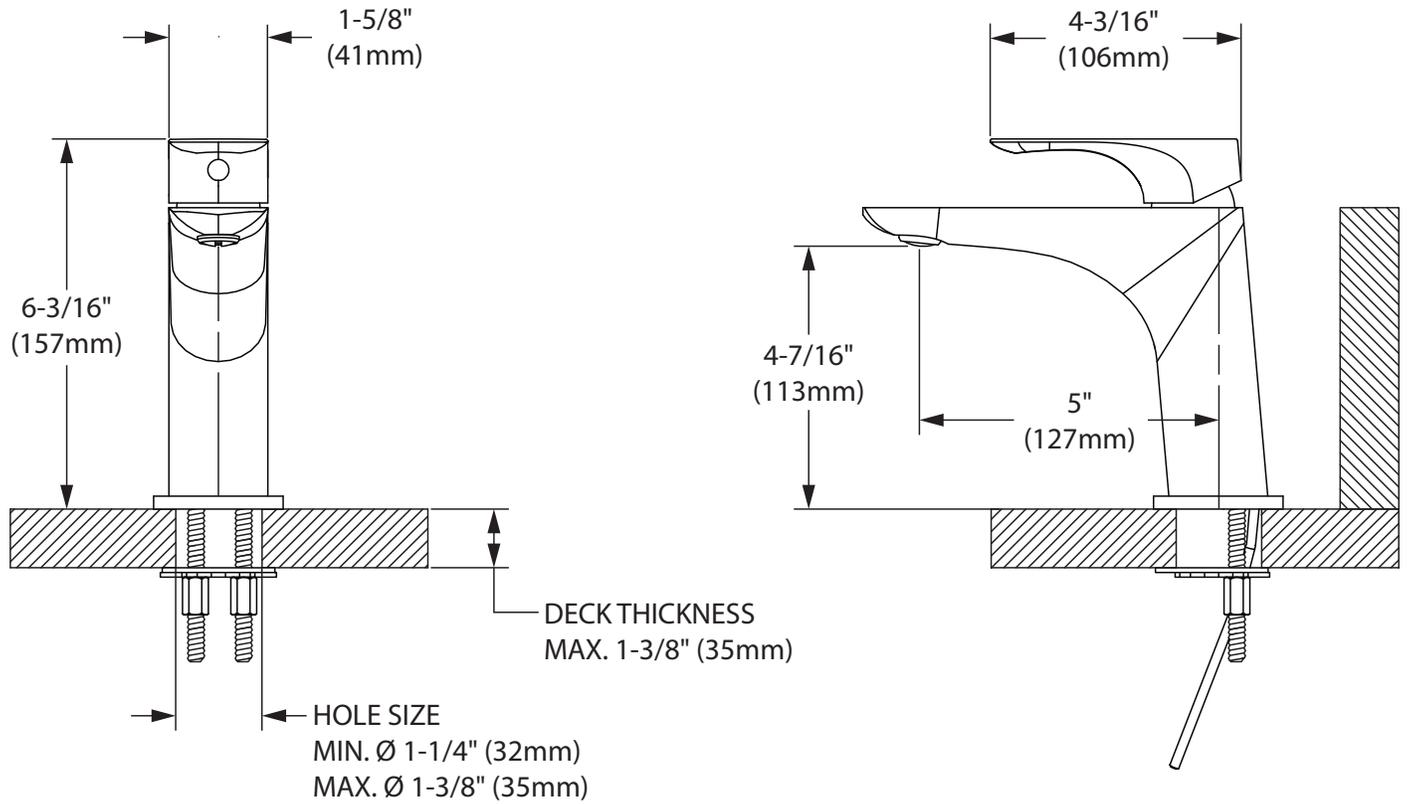

Notes:

- 1) Dimensions subject to change without notice
- 2) Hoses removed for clarity