

Location:



SYMMONS® Duro



SLW362210

Two Handle Widespread Lavatory Faucet Specification Submittal


Model Numbers		Feature Highlights
☐ SLW362210	Two Handle Widespread Lavatory Faucet	8" to 16" mount configuration - Quarter turn ceramic cartridges 4" height - Lift rod and metal drain assembly - Standard 1.0 gpm (3.8 L/min) flow rate - Faucet shall be metal construction, plated in standard polished chrome finish
Finish Options/Modifications		Compliance
☐ 05	 0.5 gpm (1.9 L/min) flow restrictor	ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 WaterSense 1.0 gpm (3.8 L/min)  
☐ H2	 Alternative lever handle (Chrome and Satin Nickel only)	
☐ H3	 Alternative lever handle (Chrome and Satin Nickel only)	Warranty
☐ BBZ	Brushed Bronze finish	Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 
☐ MB	Matte Black finish	
☐ STN	Satin Nickel finish	
Note: Append appropriate suffix to model number.		

Architectural/ Engineering Specification

Symmons Duro Two Handle Widespread Lavatory Faucet _____ With 8" to 16" mount configuration, quarter turn ceramic cartridges, 4" height, lift rod and metal drain assembly, standard 1.0 gpm (3.8 L/min) flow rate, faucet shall be metal construction, plated in standard polished chrome finish, 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense 1.0 gpm (3.8 L/min), complaint. Available options include: "0.5 gpm (1.9 L/min) flow restrictor", "Alternative lever handle (Chrome and Satin Nickel only)", "Brushed Bronze finish", "Matte Black finish", "Satin Nickel finish".

SLW362210

Dimensions

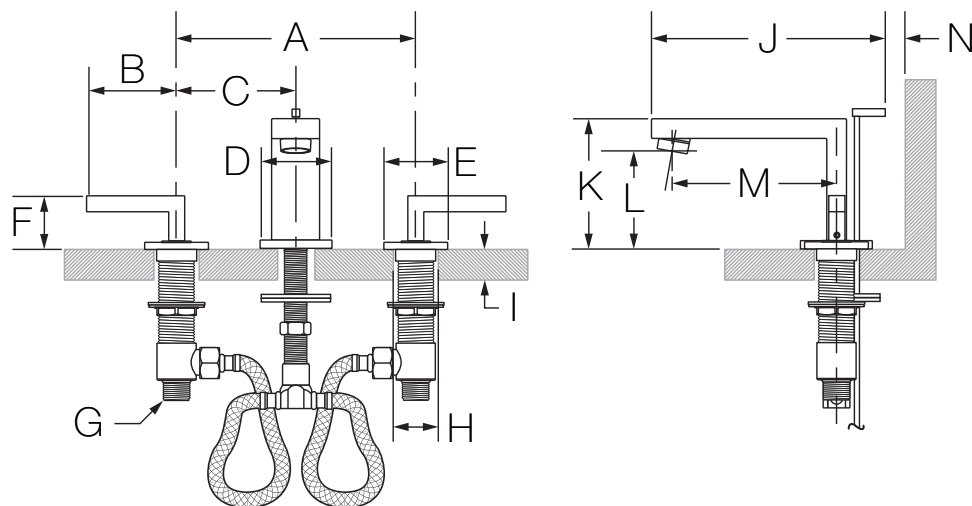


Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/4", 70 mm
C	4", 102 mm
D	2-1/8", 54 mm
E	2", 51 mm
F	1-5/8", 40 mm
G	1/2-14 NPSM
H	(3x) Hole size Min. Ø 1-1/4", 32 mm Max. Ø 1-3/8", 35 mm
I	Deck Thickness Ref. Min. 7/8", 22 mm Max. 2-3/8", 60 mm
J	6-3/8", 161 mm
K	4", 102 mm
L	3", 76 mm
M	5", 127 mm
N	Min. 1/2", 13 mm
O	1-5/8", 41 mm
P	2-3/4", 70 mm
Q	1-3/4", 44 mm
R	2-5/8", 67 mm

-H2



-H3

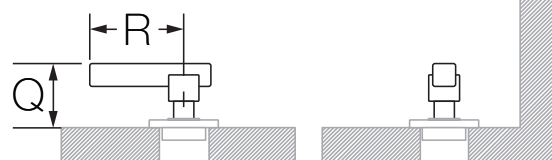

Note: Dimensions subject to change without notice.