

Location:



SYMMONS

Origins[®]



9602-P, 9602-P-TRM, 9602P, 9602PTRM

Tub/Shower Trim

Specification Submittal

Feature Highlights

- Origins Tub/Shower System or Trim
- Requires Temptrol[®] Pressure Balancing Tub/Shower Valve (included with 9602-P)
- Adjustable stop screw to limit handle turn (included with 9602-P)
- Tri-star handle
- 5-1/2" diverter tub spout
- 1 mode showerhead with easy to clean nozzles
- 2.0 gpm (7.6 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9602PTRMTC)

Model Numbers

- 9602-P**
Tub/Shower Trim with Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- 9602P**
Tub/Shower Trim with Temptrol Pressure Balancing Shower Valve (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- 9602-P-TRM**
Tub/Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- 9602PTRM**
Tub/Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

Note:

-To create trim sku, follow the format:
Base SKU -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM (If applicable)
-To create valve & trim sku, follow the format:
Base SKU -> X or CHKS -> P -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard)
-For B and REV modifications, contact customer service for your sku

Options/Modifications

- 1.2** 1.2 gpm (4.5 L/min) flow restrictor
- 1.5** 1.5 gpm (5.7 L/min) flow restrictor
- 1.75** 1.75 gpm (6.6 L/min) flow restrictor
- L1** Less showerhead
- L4** Less head, arm and flange
- L7** Less handle
- TC** Test Cap Trim
- CHKS** Integral check stop
- VP** Vandal resistant escutcheon screws in place of standard screws
- B** Brass escutcheon (chrome only)
- X** Integral service stops - allows water shut-off at valve for service

Note: Append appropriate suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)
- Buy American Act (9602-P only)



Warranty


Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Origins _____ With Origins Tub/Shower System or Trim, Requires Temptrol[®] Pressure Balancing Tub/Shower Valve (included with 9602-P), Adjustable stop screw to limit handle turn (included with 9602-P), Tri-star handle, 5-1/2" diverter tub spout, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9602PTRMTC) 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.2 - 1.2 gpm (4.5 L/min) flow restrictor", "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L7 - Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service", "CHKS - Integral check stops", and "TC - Test Cap Trim".

Dimensions

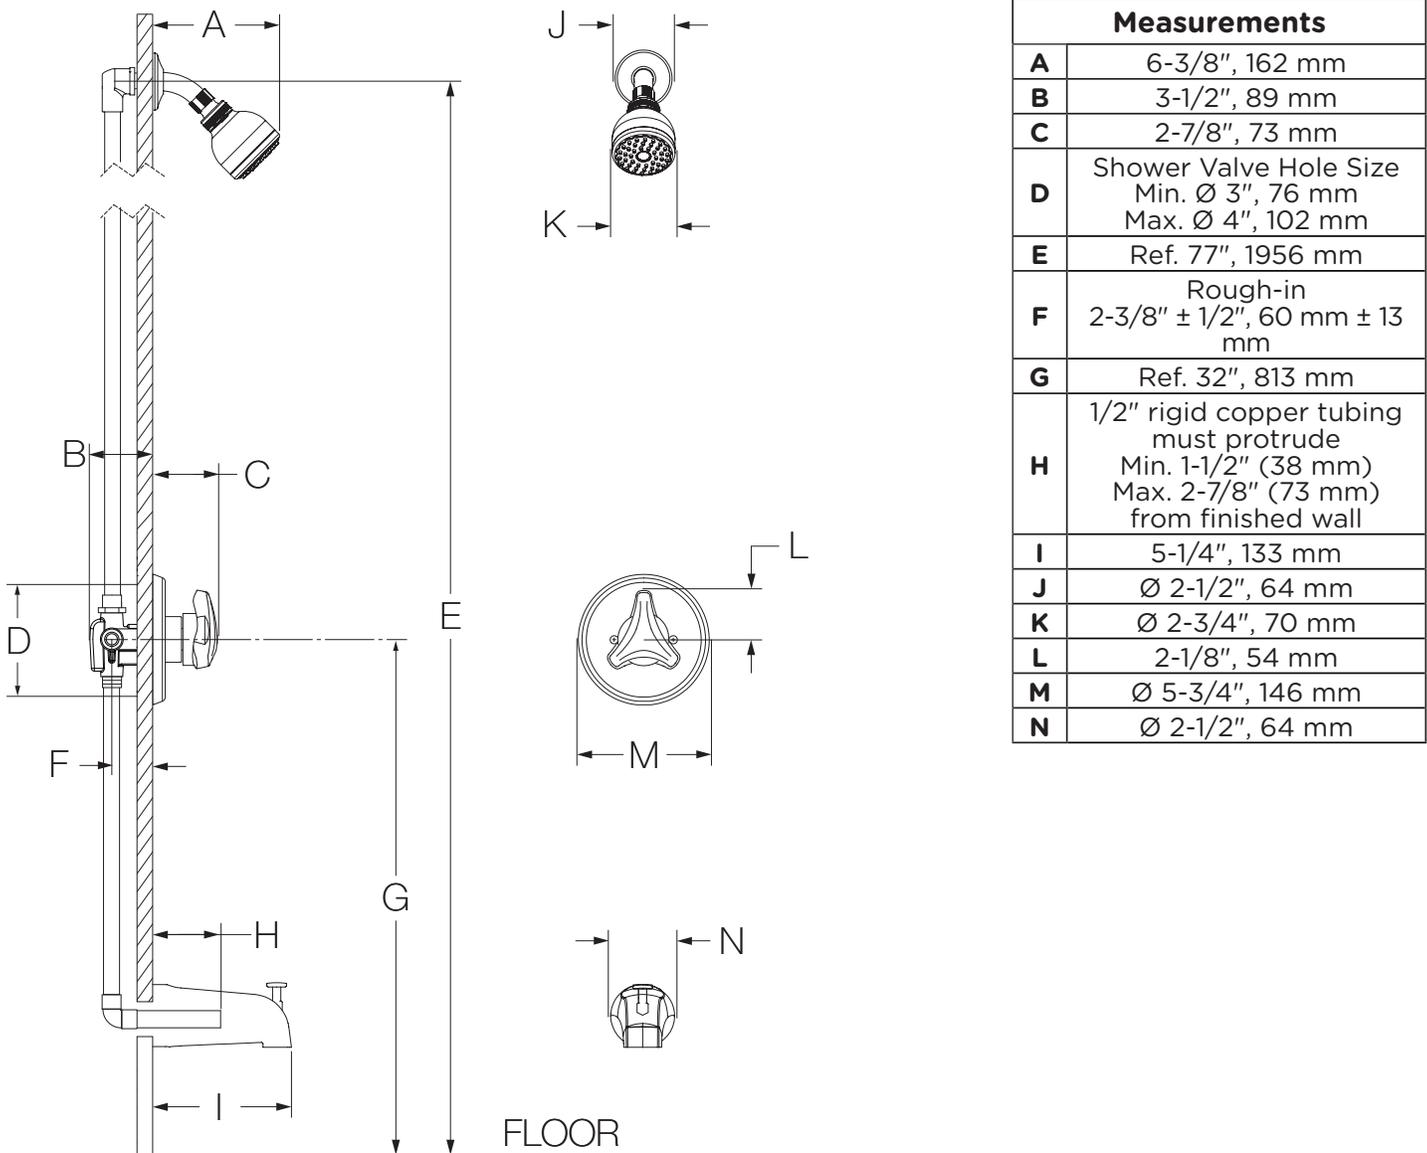

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.