




Location:

H421-V
1 Mode Hand Shower Unit
Specification Submittal



Model Numbers

☐ **H421-V** 1 Mode Hand Shower Unit

Options/ Modifications

- ☐ **1.5**  **1.5 gpm (5.7 L/min) flow restrictor**
- ☐ **STN** **Satin Nickel finish**
- ☐ **72** **72" hose in place of 60" hose**

Note: Append appropriate -suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1



Feature Highlights

- 1 mode hand shower
- 3-3/4" diameter hand shower head
- Dual checks for backflow protection
- 30" slide bar with cradle for hand shower mounting
- 60" flexible metal hose
- Standard 2.0 gpm (7.6 L/min) flow restrictor
- Shall be metal and nonmetallic construction, plated in standard polished chrome finish

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons 1 Mode Hand Shower Unit _____ Includes 1 mode hand shower, 3-3/4" diameter hand shower head, Dual checks for backflow protection, 30" slide bar with cradle for hand shower mounting, 60" flexible metal hose, Standard 2.0 gpm (7.6 L/min) flow restrictor, Shall be metal and nonmetallic construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish", "72 - 72" hose in place of 60" hose".

Dimensions

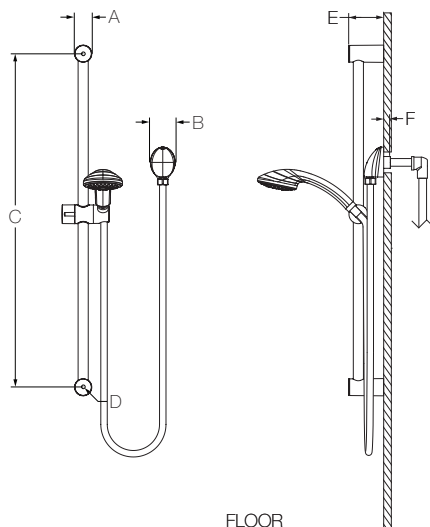

Measurements

A	Ø 1-1/2", 38 mm
B	2-1/8", 54 mm
C	28-9/16", 725 mm
D	(2x) Hole Size: Ø 1/4", 6 mm
E	3", 76 mm
F	Male 1/2-14 NPT fitting must be recessed 1/4" (6 mm) from finished wall

Note: Dimensions are subject to change without notice.