

Location:



3603-H321-V-TRM, 3603H321TRMTC
Hand Shower Trim
Specification Submittal



Feature Highlights

- Duro Hand Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- 30" slide bar for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 1 mode hand shower wand
- Standard flow rate, 2.0 gpm (7.6 L/min)
- Tub spout and showerhead not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3603H321TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers

- 3603-H321-V-TRM**
Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately
- 3603H321TRMTC**
Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)



Options/Modifications

- 1.5**  **1.5 gpm (5.7 L/min) flow restrictor**
- L2** **Less hand shower wand**
- BBZ** **Brushed Bronze finish**
- MB** **Matte Black finish**
- STN** **Satin Nickel finish**

Note: Append appropriate -suffix to model number.

Warranty


Limited Lifetime - to the original end purchaser in consumer/residential installations.
10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Duro Hand Shower Trim _____ Includes Duro Hand Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Metal lever handle, 30" slide bar for hand shower wand, Dual checks for backflow protection 60" flexible metal hose, 1 mode hand shower wand, Standard flow rate, 2.0 gpm (7.6 L/min), Tub spout and showerhead not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 3603H321TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1. WaterSense 1.5 gpm (5.7 L/min). 2.0 gpm (7.6 L/min) compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L2 - Less hand shower wand", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish".

Dimensions

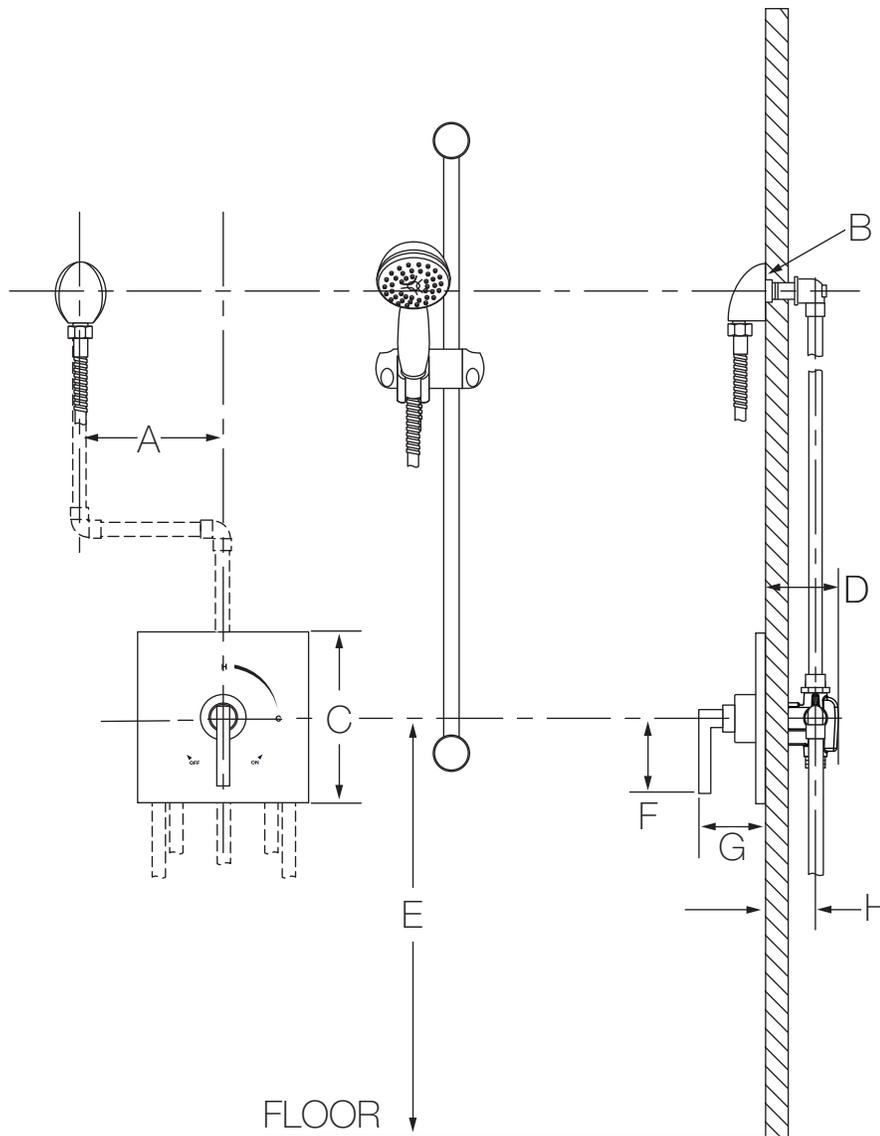

Measurements	
A	6", 152 mm
B	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
C	Sq. 7-1/2", 191 mm
D	3-1/2", 89 mm
E	Ref. 42", 1067 mm
F	3-1/8", 79 mm
G	3-1/2", 89 mm
H	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see H as reference).
- 4) Dimensions subject to change without notice.