



Location:



H501-V  
Hand Shower  
**Specification Submittal**



Model Numbers		Feature Highlights
<input type="checkbox"/> H501-V	Hand Shower	<ul style="list-style-type: none"><li>• Single function wall mounted hand shower with spray head</li><li>• 5 foot flexible metal hose with in-line vacuum breaker, wall connection, cradle and flange</li><li>• Standard flow rate at 2.0 gpm (7.6 L/Min)</li><li>• Polished chrome finish (standard)</li></ul>
Options/ Modifications		
<input type="checkbox"/> STN	Satin Nickel finish	
<b>Note:</b> Append appropriate -suffix to model number.		
Compliance		Warranty
<div>- ASME A112.18.1/CSA B125.1</div> <div></div>		<div><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</div> <div><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</div> <div></div>

**Architectural/ Engineering Specification**

Symmons Hand Shower \_\_\_\_\_ Includes Single function wall mounted hand shower with spray head, 5 foot flexible metal hose with in-line vacuum breaker, wall connection, cradle and flange, Standard flow rate at 2.0 gpm (7.6 L/Min), Polished chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "STN - Satin Nickel finish".




H501-V

---

## Dimensions

---

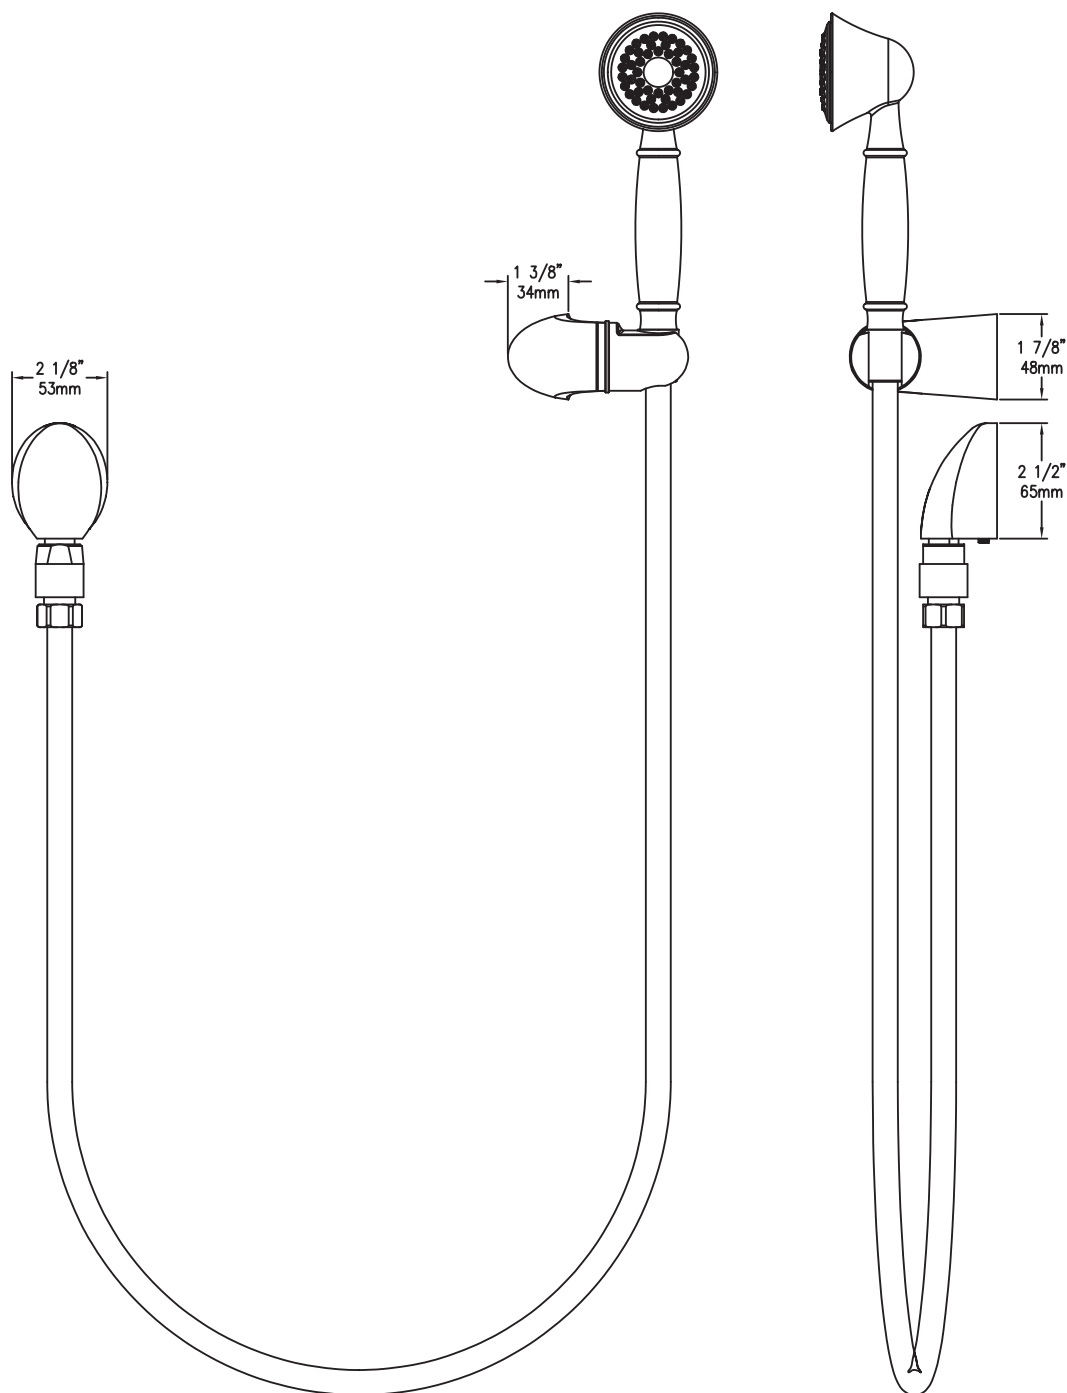

**Note:** Dimensions subject to change without notice.