

Location:



SYMMONS® Dia®

35EX-RD1

Exposed Shower Riser

Specification Submittal



Feature Highlights

- 1 mode showerhead
- 1 mode hand shower
- 60" flexible metal hose
- Dual checks for backflow protection
- Diverter included for toggling between hand shower and showerhead
- Includes column/slide bar and hand shower bracket
- 2.0 gpm (7.6 L/min) standard flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard polished chrome finish
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers


- ☐ **35EX-RD1**
Exposed Shower Riser with Hand Shower and Showerhead

Compliance

- ASME A112.18.1/CSA B125.1



Options/Modifications

- ☐ **-1.5**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **-STN** Satin Nickel finish

Note: Append appropriate -suffix to model number.

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Dia Exposed Shower Riser _____ Includes 1 mode showerhead, 1 mode hand shower, 60" flexible metal hose, Dual checks for backflow protection, Diverter included for toggling between hand shower and showerhead, Includes column/slide bar and hand shower bracket, 2.0 gpm (7.6 L/min) standard flow restrictor, Components shall be metal and nonmetallic construction, plated in standard polished chrome finish, For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish".

Dimensions

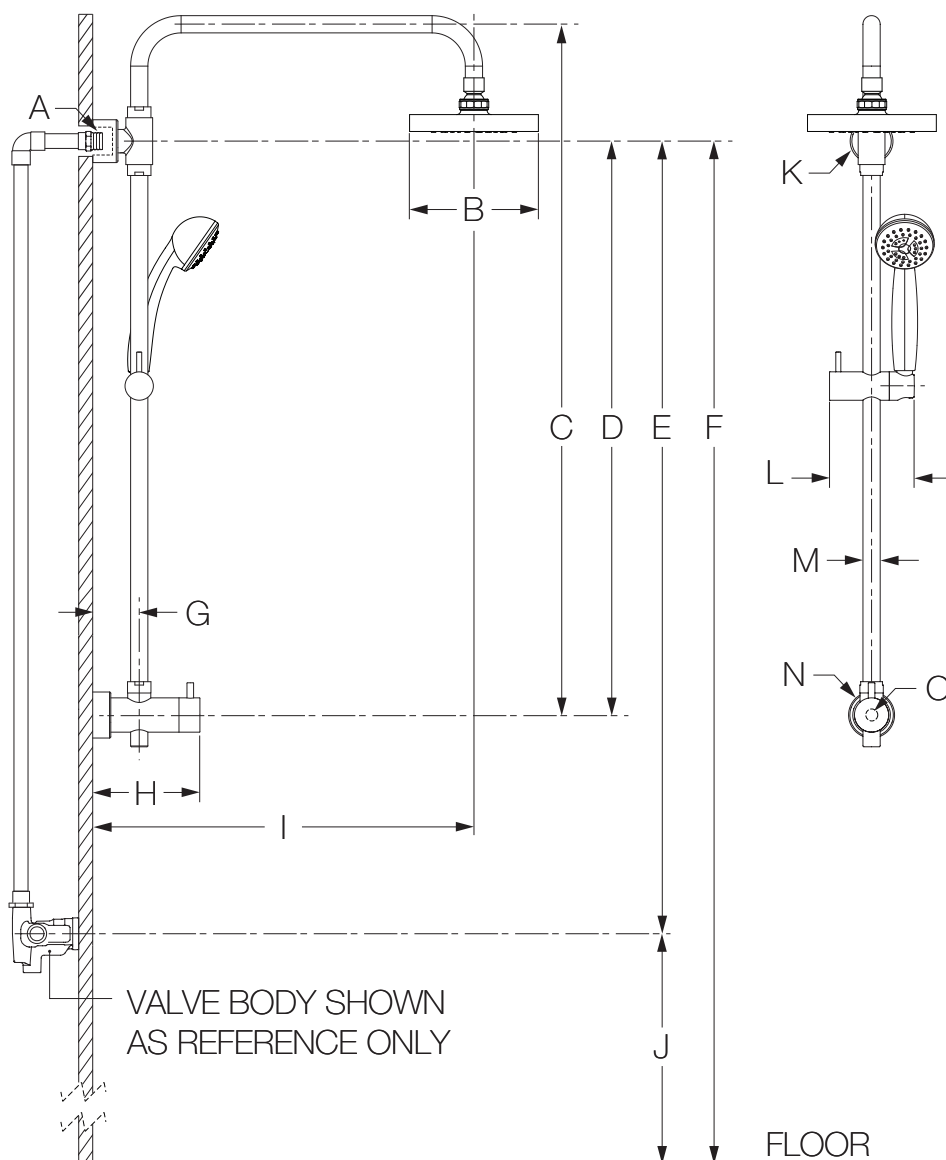

Note: Dimensions subject to change without notice.



Important Notes:

- 1) If the distance for item E is less than 29" (737 mm), Exposed Shower Riser is not appropriate for your application.
- 2) Hand shower wands that exceed 0.8 lbs. are not recommended for Exposed Shower Riser.

Measurements

A	Male 1/2" NPT thread must protrude 1/2" (13 mm) from finished wall
B	Ø 6", 152 mm
C	27-1/2", 699 mm
D	22", 559 mm
E	For Shower Systems: Min. 29", 737 mm from centerline of shower output to valve For Tub/Shower Systems: Min. 29", 737 mm from centerline of shower output to valve
F	Ref. 77", 1956 mm
G	2-3/16", 55 mm
H	5-1/16", 128 mm
I	17-15/16", 456 mm
J	For Shower Systems: Min. 42", 1067 mm Max. 48", 1219 mm For Tub/Shower Systems: Ref. 32", 813 mm
K	Ø 2", 51 mm
L	4", 102 mm
M	Ø 13/16", 21 mm
N	Ø 2-3/16", 56 mm
O	Hole Size Ø 5/16", 8 mm