


3596BTRM Location:

Tub/Hand Shower/Shower Trim

## **Specification Submittal**

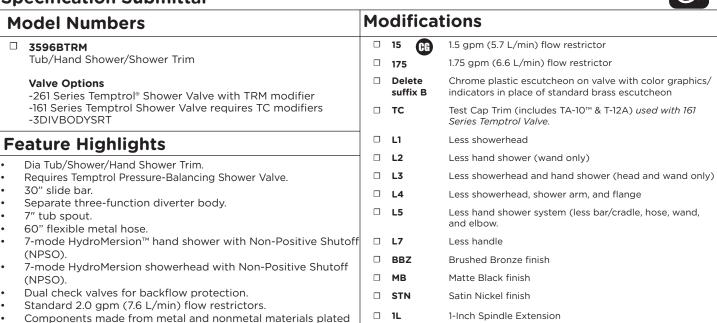

## Compliance

- ASME A112.18.1/CSA B125.1
- WaterSense 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)

in standard Polished Chrome finish.

Lever handle meets ADA requirements for operation







# Warranty

**Limited Lifetime** - for residential installations.

10 Years - for commercial/industrial installations.

Refer to www.symmons.com/warranty for complete warranty information.



#### **SKU Builder**


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3596	STN		15	TRM			3596STN15TRM
3596B	МВ	L3		TRM	TC	1L	3596BMBL3TRMTC1L

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

## **Architectural/Engineering Specification**

Symmons Dia Tub and Shower and Hand Shower System Includes Dia Tub/Shower/Hand Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features 30" slide bar, 7" tub spout, 60" flexible metal hose, 7-mode HydroMersion hand shower with NPSO, 7-mode HydroMersion showerhead with NPSO, dual check valves for backflow protection and standard 2.0 gpm (7.6 L/ min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. Lever handle meets ADA requirements for operation. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 1.75 gpm (6.6 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, L1 - Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead and hand shower (head and wand only), L4 = Less shower arm and flange, L5 = Less hand shower system, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, 1L = 1-Inch Spindle Extension, and TC = Test Cap Trim.

### **Dimensions**

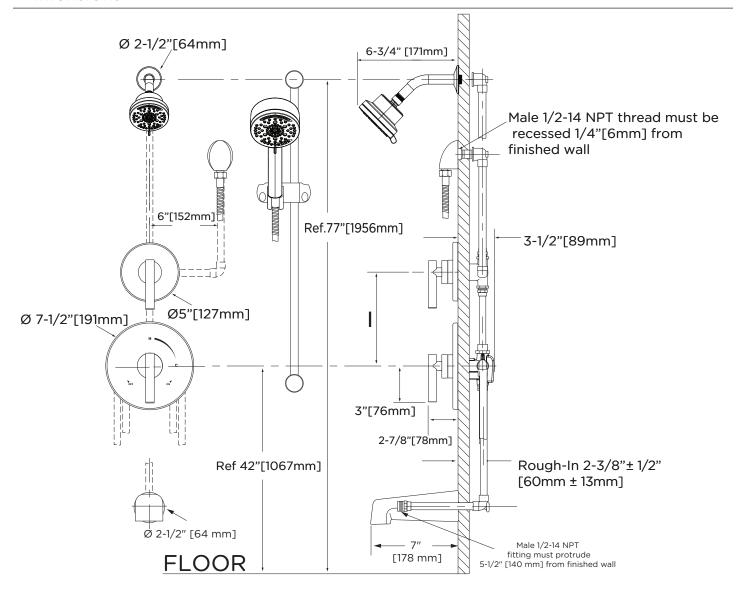

#### **Notes:**

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.