



SYMMONS® Canterbury®



Location:

S-4504-TRM, S4504TRMTC

Tub/Hand Shower Trim

Specification Submittal




Model Numbers		Feature Highlights	
<input type="checkbox"/> S-4504-TRM	Tub/Hand Shower Trim with integral diverter control, Temptrol Pressure Balancing Tub/Shower Valve ordered separately	<ul style="list-style-type: none">• Canterbury Tub/Hand Shower Trim• Requires Temptrol® Pressure Balancing Tub/Shower Valve• Integral diverter control• Metal lever handle• 7-1/4" non-diverter tub spout• Cradle for hand shower wand• 60" flexible metal hose• 3 mode hand shower• Dual checks for backflow protection• 2.0 gpm (7.6 L/min) flow restrictor• Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish• Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4504TRMTC)• For optional in-line vacuum breaker order p/n EF-109	
<input type="checkbox"/> S4504TRMTC	Tub/Hand Shower Trim with integral diverter control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap		
Options/ Modifications		Warranty	
<input type="checkbox"/> 1.5	<input checked="" type="checkbox"/> 1.5 gpm (5.7 L/min) flow restrictor	Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.	
<input type="checkbox"/> STN	Satin Nickel finish		
<input type="checkbox"/> L5	Less hand shower system (less bar/cradle, hose, wand and elbow)		
Note: Append appropriate -suffix to model number.			
Compliance			
- ASME A112.18.1/CSA B125.1			
			

Architectural/ Engineering Specification

Symmons Canterbury Tub and Hand Shower Trim _____ Includes Canterbury Tub/Hand Shower Trim, Requires Temptrol® Pressure Balancing Tub and Shower Valve, Integral diverter control, Metal lever handle, 7-1/4" non-diverter tub spout, Cradle for hand shower wand, 60" flexible metal hose, 3 mode hand shower, Dual checks for backflow protection, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4504TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish", "L5 - Less hand shower system (less bar/cradle, hose, wand and elbow)".

Dimensions

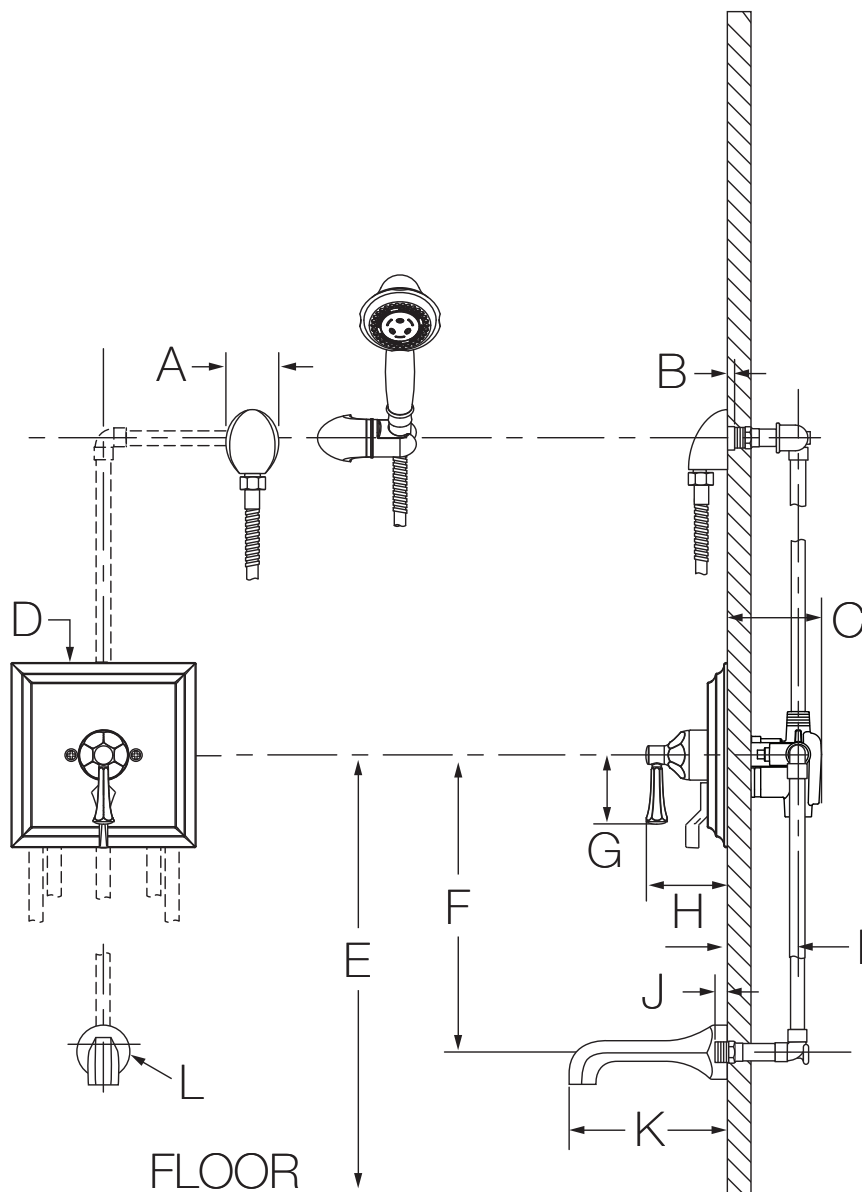

Measurements	
A	2-1/8", 54 mm
B	Male 1/2" IPS fitting must be recessed 1/4" (6 mm) from finished wall
C	3-1/2", 89 mm
D	Sq. 7-1/2", 191 mm
E	Ref. 32", 813 mm
F	Ref. 12", 305 mm
G	3" 76 mm
H	3" 76 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	Male 1/2-14 NPT fitting must protrude 1/2" (13 mm) from finished wall
K	7-1/4", 184 mm
L	Ø 2-5/8", 67 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.