








4705-TRM, 4705TRM
Shower/Hand Shower Trim
Specification Submittal

Location:

<p>Model Numbers</p> <ul style="list-style-type: none"> <input type="checkbox"/> 4705-TRM Shower/Hand Shower Trim (modifiers include decimal points and hyphens) <input type="checkbox"/> 4705TRM Shower/Hand Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points) <p>Valve Options: -261 Series Temptrol® Shower Valve with TRM modifier -161 Series Temptrol Shower Valve requires TC modifier -2DIVBODYSRT</p>	<p>Options/Modifications</p> <ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -1.75  1.75 gpm (6.62 L/min) flow restrictor <input type="checkbox"/> L1 Less showerhead <input type="checkbox"/> L2 Less hand shower wand <input type="checkbox"/> L3 Less showerhead and hand shower wand <input type="checkbox"/> L4 Less showerhead, shower arm, and flange <input type="checkbox"/> L5 Less hand shower system (less cradle, hose, wand and elbow) <input type="checkbox"/> L7 Less handles <input type="checkbox"/> TC Test Cap Trim (includes TA-10™ & T-12A) used with 161/162 Series Temptrol Shower Valve <input type="checkbox"/> -STN Satin Nickel finish
<p>Feature Highlights</p> <ul style="list-style-type: none"> • Allura Shower/Hand Shower Trim. • Requires Temptrol Pressure-Balancing Shower Valve. • Requires Symmons 3-Port Diverter Body. • Metal lever handles. • Cradle for hand shower wand. • Dual checks for backflow protection. • 60" flexible metal hose. • 3-mode hand shower wand. • 3-mode showerhead. • Standard 2.0 gpm (7.6 L/min) flow restrictors. • Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 	<p>Warranty</p> <p>Limited Lifetime - residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>  <p>Compliance</p> <ul style="list-style-type: none"> -ASME® A112.18.1/CSA® B125.1 -Lever handle meets ADA requirements for operation -1.5 gpm and 1.75 gpm options meet CALGreen requirements  

SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
4705-	STN		1.5	TRM		4705-STN-1.5-TRM
4705		L3		TRM	TC	4705L3TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Allura _____ With Allura Shower/Hand Shower Trim for Temptrol Pressure-Balancing Shower Valve. Requires Symmons 3-Port Diverter Body. Features metal lever handles, cradle for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, 3-mode hand shower wand, 3-mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Lever handle meets ADA requirements for operation. 1.5 gpm and 1.75 gpm options meet CALGreen requirements. Available options include: 1.5 = 1.5 gpm (5.7 L/min) flow restrictor, 1.75 = 1.75 gpm (6.62 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower wand, L3 = Less showerhead & hand shower wand, L4 = Less showerhead, shower arm, and flange, L5 = Less hand shower system, L7 = Less handles, TC = Test Cap Trim, STN = Satin Nickel finish.

Dimensions

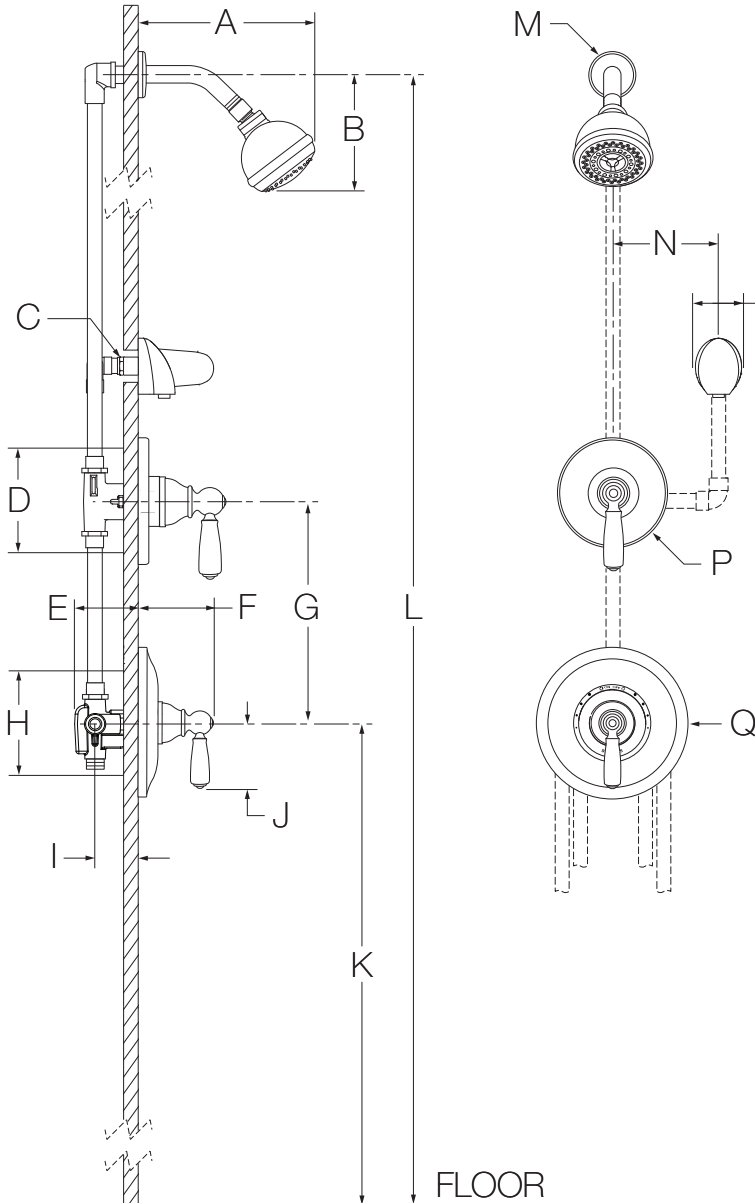

Measurements	
A	6-3/4", 171 mm
B	5-1/2", 140 mm
C	Male 1/2" NPT fitting must be recessed 1/4" (6 mm) from finished wall
D	Diverter Valve Hole Size Min. Ø 3", 76 mm Max. Ø 3-1/4", 83 mm
E	3-1/2", 89 mm
F	4-1/8", 105 mm
G	Ref. 10", 254 mm
H	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
I	Rough-In 2-3/8" ± 1/2", 60 mm ± 13 mm
J	3-1/8", 79 mm
K	Ref. 42", 1067 mm
L	Ref. 77", 1956 mm
M	Ø 2-1/2", 64 mm
N	6", 152 mm
O	2-1/8", 54 mm
P	Ø 5", 127 mm
Q	Ø 7", 178 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.