









SYMMONS Allura[®]



4702-TRM, 4702TRM
Tub/Shower Trim

Location:

Specification Submittal

<p>Model Numbers</p> <ul style="list-style-type: none"> <input type="checkbox"/> 4702-TRM Shower Trim (modifiers include decimal points and hyphens) <input type="checkbox"/> 4702TRM Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or desimal points) <p>Valve Options: -262 or 261 Series Temptrol® Shower Valve with TRM modifier -162 or 161 Series Temptrol Shower Valve requires TC modifier</p>	<p>Options/Modifications</p> <ul style="list-style-type: none"> <input type="checkbox"/> -1.5  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> -1.75  1.75 gpm (6.62 L/min) flow restrictor <input type="checkbox"/> -L1 Less showerhead <input type="checkbox"/> -STN Satin Nickel finish <input type="checkbox"/> TC Test Cap Trim (includes TA-10™ & T-12A) <i>used with 161/162 Series Temptrol Shower Valve</i> <input type="checkbox"/> L7 Less handle
<p>Feature Highlights</p> <ul style="list-style-type: none"> • Allura Tub/Shower Trim. • Requires Temptrol Pressure-Balancing Shower Valve. • Metal lever handle. • 5-1/2" diverter tub spout. • 3-mode showerhead. • Standard 2.0 gpm (7.6 L/min) flow restrictor. • Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 	<p>Warranty</p> <p>Limited Lifetime - residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>  <p>Compliance</p> <ul style="list-style-type: none"> -ASME® A112.18.1/CSA® B125.1 -WaterSense® 1.75 gpm (6.62 L/min) -Lever handle meets ADA requirements for operation -1.5 gpm and 1.75 gpm options meet CALGreen requirements   

SKU Builder

Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
4702-	STN		1.5	TRM		4702-STN-1.5-TRM
4702		L7		TRM	TC	4702L7TRMTC


Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Allura _____ With Allura Tub/Shower Trim for Temptrol Pressure-Balancing Shower Valve. Features metal lever handle, 5-1/2" diverter tub spout, 3-mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.75 compliant. Lever handle meets ADA requirements for operation. 1.5 gpm and 1.75 gpm options meet CALGreen requirements. Available options include: 1.5 = 1.5 gpm (5.7 L/min) flow restrictor, 1.75 = 1.75 gpm (6.62 L/min) flow restrictor, STN = Satin Nickel finish, L7 = Less Handle, TC = Test Cap Trim.

4702-TRM, 4702TRM

Dimensions

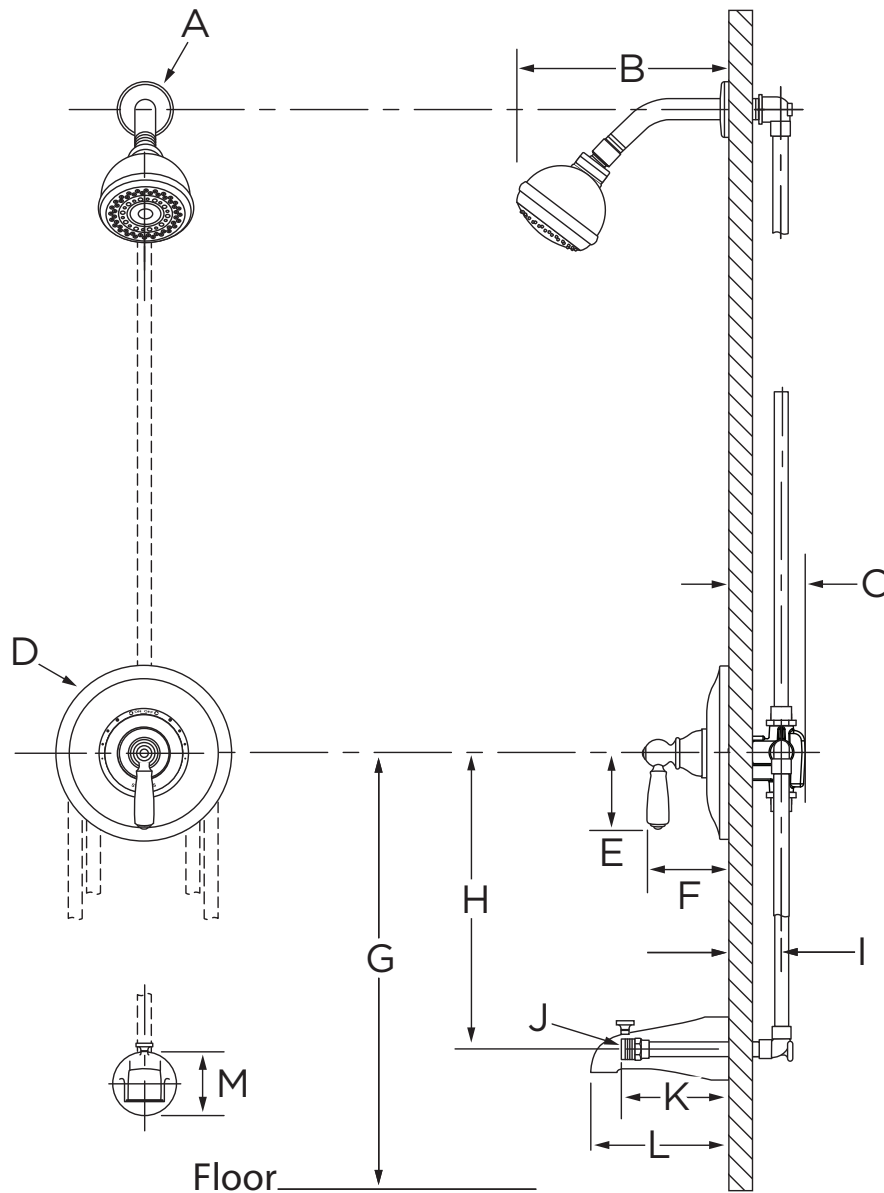

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/4", 172 mm
C	3-1/2", 89 mm
D	Ø 7", 178 mm
E	3-1/8", 79 mm
F	4", 102 mm
G	Ref. 32", 813 mm
H	Ref. 12", 305 mm
I	Rough-In 2-3/8" ± 1/2", 60 mm ± 13 mm
J	1/2" NPT
K	4", 102 mm
L	5-1/2", 140 mm
M	2-1/2", 64 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.