






35EX

Location:


## Exposed Shower System Specification Submittal

Specification	Showerhead Options
<ul style="list-style-type: none"><li>Exposed shower pipe.</li><li>Metal lever handle.</li><li>Adjustable stop screw to limit handle turn.</li><li>Separate diverter included for toggling between showerhead and hand shower position.</li><li>Includes column/slide bar and hand shower bracket.</li><li>60" flexible metal hose with check for backflow protection (requires hand shower with check or in-line vacuum breaker).</li><li>Showerhead and hand shower not included.</li><li>Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.</li><li>For optional in-line vacuum breaker order p/n EF-109.</li></ul>	<ul style="list-style-type: none"><li><input type="checkbox"/> - 402SH1 Symmons® 12" diameter rain showerhead</li><li><input type="checkbox"/> - 432SH Sereno® 8" diameter, 1 mode showerhead</li><li><input type="checkbox"/> - 482SH HydroMersion 4" diameter, 1 mode showerhead</li><li><input type="checkbox"/> - 482SHSQ HydroMersion 5" Square, 1 mode showerhead</li><li><input type="checkbox"/> - 491SH HydroMersion 7" Square, 1 mode showerhead</li><li><input type="checkbox"/> - 532SH Museo® 5-3/4" diameter, 1 mode showerhead</li><li><input type="checkbox"/> - 562SH HydroMersion 5" Square, 1 mode showerhead</li><li><input type="checkbox"/> - 582SH HydroMersion 4" diameter, 1 mode showerhead</li><li><input type="checkbox"/> - 592SH HydroMersion 4" diameter, 1 mode showerhead</li><li><input type="checkbox"/> - 682SH HydroMersion 6" diameter, 1 mode showerhead</li><li><input type="checkbox"/> - 682SHSQ HydroMersion 8" Square, 1 mode showerhead</li></ul>
Model Numbers	
<input type="checkbox"/> <b>35EX</b> <i>Dia exposed shower system</i>	<b>Note:</b> Append appropriate -suffix to model number.
Options	Hand Shower Options
<ul style="list-style-type: none"><li><input type="checkbox"/> <b>-1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li><li><input type="checkbox"/> <b>-2.0</b> 2.0 gpm (7.6 L/min) flow restrictor</li><li><input type="checkbox"/> <b>-BBZ</b> Brushed Bronze finish</li><li><input type="checkbox"/> <b>-MB</b> Matte Black finish</li><li><input type="checkbox"/> <b>-STN</b> Satin Nickel finish</li></ul>	<ul style="list-style-type: none"><li><input type="checkbox"/> -432W Symmons® 1" diameter, 1 mode hand shower</li><li><input type="checkbox"/> - EF-101 Allura® 3-3/4" diameter, 3 mode hand shower</li><li><input type="checkbox"/> - EF-118 Symmons® 3-3/4" diameter, 1 mode hand shower</li><li><input type="checkbox"/> - EF-119 Symmons® 3-3/4" diameter, 3 mode hand shower</li><li><input type="checkbox"/> - 10262W5 Symmons® 4-3/4" diameter, 5 mode hand shower</li></ul>
<b>Note:</b> Append appropriate -suffix to model number.	<b>Note:</b> Append appropriate -suffix to model number.
Compliance	Warranty
<ul style="list-style-type: none"><li>ASME A112.18.1/CSA B125.1.</li><li>Lever handle meets ADA requirements For operation.</li><li>Must be paired with ADA compliant hand shower.</li></ul>  	<p><b>Limited Lifetime</b> - for residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations.</p> <p>Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 

## Architectural/Engineering Specification

Symmons Dia® Exposed Shower System \_\_\_\_\_ Includes exposed shower pipe, metal lever handle, adjustable stop screw to limit handle turn, separate diverter included for toggling between showerhead and hand shower position, column/slide bar and hand shower bracket, 60" flexible metal hose with check for backflow protection (requires hand shower with check or in-line vacuum breaker), showerhead and hand shower not included. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish, For optional in-line vacuum breaker order p/n EF-109. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant, Lever handle meets ADA requirements for operation. Must be paired with ADA compliant hand shower. Available options: 1.5 = 1.5 gpm (5.7 L/min) flow restrictor, 2.0 = 2.0 gpm (7.6 L/min) flow restrictor, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, 402SH1 = Symmons® 12" diameter rain showerhead, 432SH = Sereno® 8" diameter, 1 mode showerhead, 482SH = HydroMersion 4" diameter, 1 mode showerhead, 482SHSQ = HydroMersion 5" Square, 1 mode showerhead, 491SH = HydroMersion 7" Square, 1 mode showerhead, 532SH = Museo® 5-3/4" diameter, 1 mode showerhead, 562SH = HydroMersion 5" Square, 1 mode showerhead, 582SH = HydroMersion 4" diameter, 1 mode showerhead, 592SH = HydroMersion 4" diameter, 1 mode showerhead, 682SH = HydroMersion 6" diameter, 1 mode showerhead, 682SHSQ = HydroMersion 8" Square, 1 mode showerhead, 432W = Symmons® 1" diameter, 1 mode hand shower, EF-101 = Allura® 3-3/4" diameter, 3 mode hand shower, EF-118 = Symmons® 3-3/4" diameter, 1 mode hand shower, EF-119 = Symmons® 3-3/4" diameter, 3 mode hand shower, and 10262W5 = Symmons® 4-3/4" diameter, 5 mode hand shower.

# Dimensions

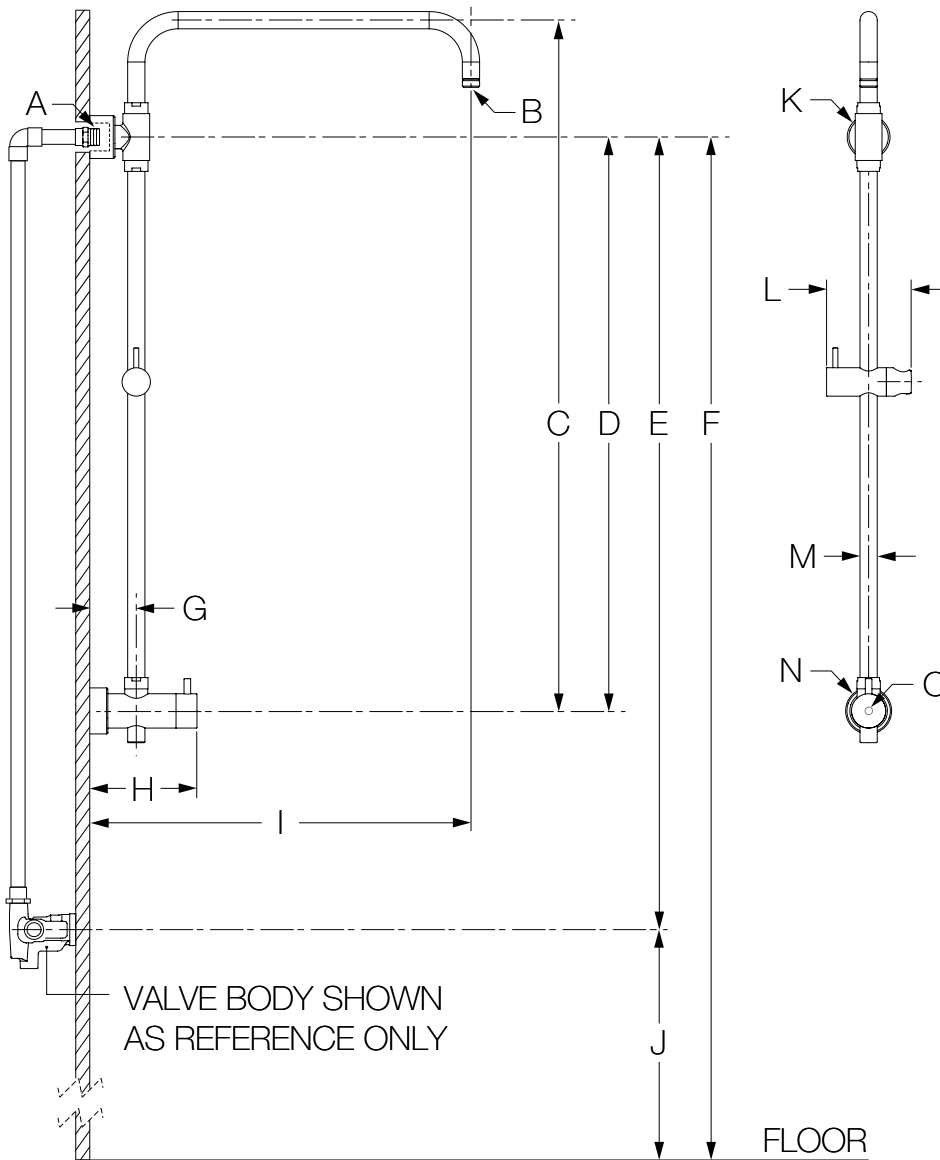

## Important Notes:

- 1) If the distance for item E is less than 29" (737 mm), Exposed Shower Riser is not appropriate for your application.
- 2) Hand shower wands that exceed 0.8 lbs. are not recommended for Exposed Shower Riser.

## Measurements

A	Male 1/2" NPT thread must protrude 1/2" (13 mm) from finished wall
B	1/2"-14 NPT
C	27-1/2", 699 mm
D	22", 559 mm
E	<b>For Shower Systems:</b> Min. 29", 737 mm from centerline of shower output to valve <b>For Tub/Shower Systems:</b> Min. 29", 737 mm from centerline of shower output to valve
F	Ref. 77", 1956 mm
G	2-3/16", 55 mm
H	5-1/16", 128 mm
I	17-15/16", 456 mm
J	<b>For Shower Systems:</b> Min. 42", 1067 mm Max. 48", 1219 mm <b>For Tub/Shower Systems:</b> Ref. 32", 813 mm
K	Ø 2", 51 mm
L	4", 102 mm
M	Ø 13/16", 21 mm
N	Ø 2-3/16", 56 mm
O	Hole Size Ø 5/16", 8 mm

Note: Dimensions subject to change without notice.