








### 3605-H321-V-TRM, 3605TRM Shower System

### Specification Submittal

<h4>Model Numbers</h4> <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>3605-H321-V-TRM</b> Shower System Trim (modifiers include decimal points and hyphens)</li> <li><input type="checkbox"/> <b>3605TRM</b> Shower System Trim (use when ordering L1-L7 and TC modification, do not use hyphens or decimal points)</li> </ul>	<h4>Feature Highlights</h4> <ul style="list-style-type: none"> <li>• Adjustable stop screw to limit handle rotation</li> <li>• 30" Slide bar</li> <li>• Two function diverter body sold separately</li> <li>• In-line vacuum breaker</li> <li>• 60" flexible metal hose</li> <li>• 1 Mode hand shower</li> <li>• 1 Mode showerhead and standard 2.0 Gpm (7.6 L/min) flow restrictor</li> <li>• Components made from metal and nonmetallic materials plated in standard polished chrome finish</li> <li>• Valves to be ordered separately</li> </ul>
<h4>Modifications</h4> <ul style="list-style-type: none"> <li><input type="checkbox"/> <b>-1.5</b>  1.5 gpm (5.7 L/min) flow restrictor</li> <li><input type="checkbox"/> <b>SH4</b> Square, 1 mode showerhead</li> <li><input type="checkbox"/> <b>TC</b> Test Cap Trim (includes TA-10&amp;T-12A) used with 16 series Temptrol Valve</li> <li><input type="checkbox"/> <b>L1</b> Less showerhead</li> <li><input type="checkbox"/> <b>L2</b> Less hand shower (wand only)</li> <li><input type="checkbox"/> <b>L3</b> Less showerhead and hand shower (head and wand only)</li> <li><input type="checkbox"/> <b>L4</b> Less head, arm, and flange</li> <li><input type="checkbox"/> <b>L5</b> Less hand shower system</li> <li><input type="checkbox"/> <b>L7</b> Less handle</li> <li><input type="checkbox"/> <b>-BBZ</b> Brushed Bronze finish</li> <li><input type="checkbox"/> <b>-MB</b> Matte Black finish</li> <li><input type="checkbox"/> <b>-STN</b> Satin Nickel finish</li> </ul>	<h4>Warranty</h4> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>  <h4>Compliance</h4> <ul style="list-style-type: none"> <li>-ASME A112.18.1/CSA B125.1</li> <li>-WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</li> <li>-Lever handle meets ADA requirements</li> </ul>   

### SKU Builder


Series	Finish	Shower head	Modi-fier	Flow Rate	Trim (required)	Test Cap	Final SKU
3605-H321-V	STN			1.5	TRM		3605-H321-V-STN-1.5-TRM
3605	MB	SH4	L3	15	TRM	TC	3605BMBSH4L315TRMTC

**Note:** No more than two modifiers (L1-L7) and modifier order will follow numerical order.

### Architectural/Engineering Specification



Symmons Duro Shower and Hand Shower System \_\_\_\_\_ Includes Tub and Shower and Hand Shower System powered by the Temptrol® Pressure Balancing valve. Features adjustable stop screw to limit handle rotation, 30" slide bar, in-line vacuum breaker, 60" flexible metal hose, 1 mode hand shower, 1 mode showerhead and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower (wand only)", "L3 - Less showerhead and hand shower (head and wand only)", "L4 - Less head, arm, and flange", "L5 - Less hand shower system", "L7 - Less handle", "BBZ - Brushed Bronze finish", "MB - Matte Black finish", "STN - Satin Nickel finish", "TC - Test Cap Trim".

# Dimensions

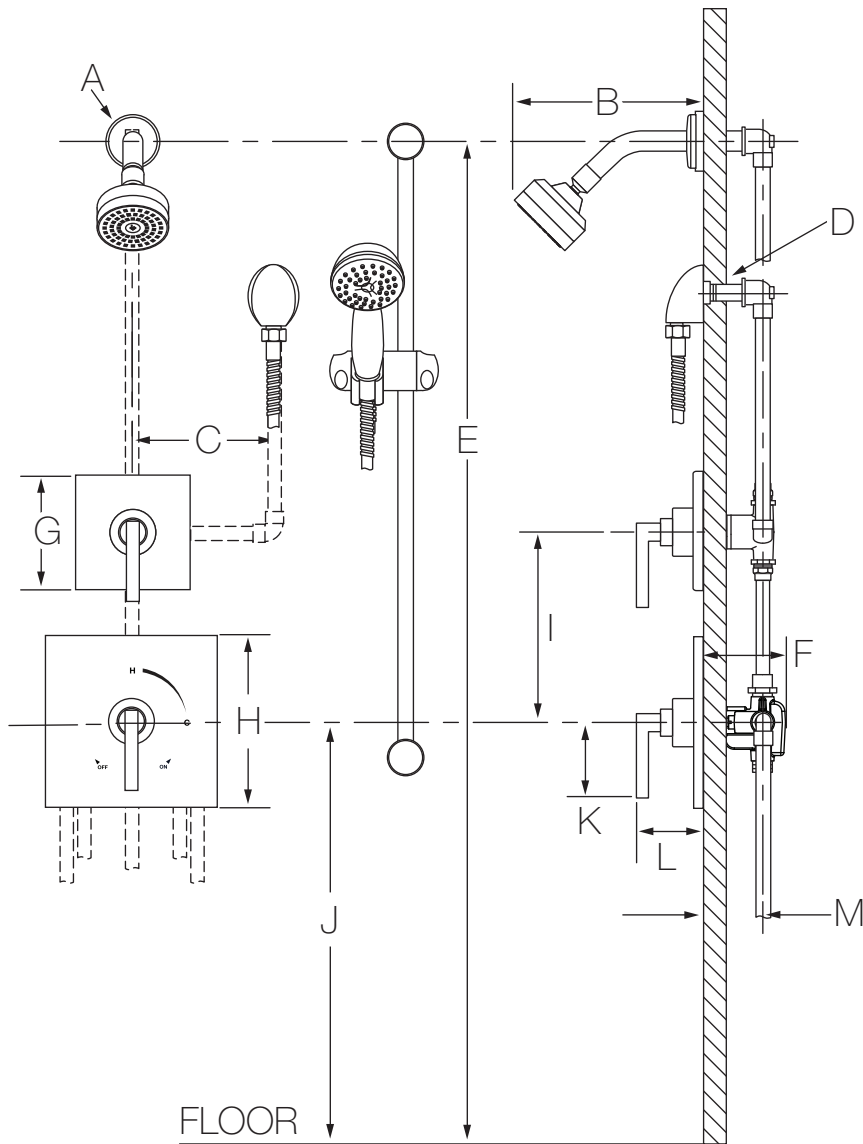

Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	6", 152 mm
D	Male 1/2-14 NPT thread must be recessed 1/4" (6 mm) from finished wall
E	Ref. 77", 1956 mm
F	3-1/2", 89 mm
G	Sq. 5", 127 mm
H	Sq. 7-1/2", 191 mm
I	Ref. 10", 254 mm
J	Ref. 42", 1067 mm
K	3-1/8", 79 mm
L	3-1/2", 89 mm
M	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
N	6-3/4", 171 mm
O	6-3/4", 171 mm
P	5-5/8", 143 mm
Q	3-1/8", 79 mm
R	3-5/8", 92 mm
S	3-1/8", 79 mm
T	3-5/8", 92 mm

**-SH4**



## Notes:

- 1) All dimensions measured from nominal rough-in (see M as reference).
- 2) Dimensions are subject to change without notice.