



SYMMONS® Duro®

Location:

36EX
Exposed Shower System
Specification Submittal




<p>Model Numbers</p>	<p>Showerhead Options</p>
<p><input type="checkbox"/> 36EX Duro exposed shower system</p>	<p><input type="checkbox"/> - 402SH1 Symmons® 12" diameter rain showerhead <input type="checkbox"/> - 432SH Sereno® 8" diameter, 1 mode showerhead <input type="checkbox"/> - 482SH HydroMersion 4" diameter, 1 mode showerhead <input type="checkbox"/> - 482SHSQ HydroMersion 5" Square, 1 mode showerhead <input type="checkbox"/> - 491SH HydroMersion 7" Square, 1 mode showerhead <input type="checkbox"/> - 532SH Museo® 5-3/4" diameter, 1 mode showerhead <input type="checkbox"/> - 562SH HydroMersion 5" Square, 1 mode showerhead <input type="checkbox"/> - 582SH HydroMersion 4" diameter, 1 mode showerhead <input type="checkbox"/> - 592SH HydroMersion 4" diameter, 1 mode showerhead <input type="checkbox"/> - 682SH HydroMersion 6" diameter, 1 mode showerhead <input type="checkbox"/> - 682SHSQ HydroMersion 8" Square, 1 mode showerhead</p>
<p>Options/ Modifications</p> <p><input type="checkbox"/> 1.5 1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> 2.0 2.0 gpm (7.6 L/min) flow restrictor <input type="checkbox"/> STN Satin Nickel finish</p> <p>Note: Append appropriate -suffix to model number.</p>	<p>Note: Append appropriate -suffix to model number.</p>
<p>Feature Highlights</p> <ul style="list-style-type: none"> Exposed shower pipe. Metal lever handle. Adjustable stop screw to limit handle turn. Separate diverter included for toggling between showerhead and hand shower position. Includes column/slide bar and hand shower bracket. 60" flexible metal hose with check for backflow protection (requires hand shower with check or in-line vacuum breaker). Showerhead and hand shower not included. Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish. For optional in-line vacuum breaker order p/n EF-109. 	<p>Hand Shower Options</p> <p><input type="checkbox"/> -432W Symmons® 1" diameter, 1 mode hand shower <input type="checkbox"/> - EF-101 Allura® 3-3/4" diameter, 3 mode hand shower <input type="checkbox"/> - EF-118 Symmons® 3-3/4" diameter, 1 mode hand shower <input type="checkbox"/> - EF-119 Symmons® 3-3/4" diameter, 3 mode hand shower <input type="checkbox"/> - 10262W5 Symmons® 4-3/4" diameter, 5 mode hand shower</p> <p>Note: Append appropriate -suffix to model number.</p>
<p></p>	
<p>Compliance</p> <p>-ASME A112.18.1/CSA B125.1</p>	<p>Warranty</p>
<p></p>	<p>Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>

Architectural/ Engineering Specification

Symmons Duro Exposed Shower System _____ Includes Exposed shower pipe, Metal lever handle, Adjustable stop screw to limit handle turn, Separate diverter included for toggling between showerhead and hand shower position, Includes column/slide bar and hand shower bracket, 60" flexible metal hose with check for backflow protection (requires hand shower with check or in-line vacuum breaker), Showerhead and hand shower not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1. Available options: 1.5 = 1.5 gpm (5.7 L/min) flow restrictor, 2.0 = 2.0 gpm (7.6 L/min) flow restrictor, STN = Satin Nickel finish, 402SH1 = Symmons® 12" diameter rain showerhead, 432SH = Sereno® 8" diameter, 1 mode showerhead, 482SH = HydroMersion 4" diameter, 1 mode showerhead, 482SHSQ = HydroMersion 5" Square, 1 mode showerhead, 491SH = HydroMersion 7" Square, 1 mode showerhead, 532SH = Museo® 5-3/4" diameter, 1 mode showerhead, 562SH = HydroMersion 5" Square, 1 mode showerhead, 582SH = HydroMersion 4" diameter, 1 mode showerhead, 592SH = HydroMersion 4" diameter, 1 mode showerhead, 682SH = HydroMersion 6" diameter, 1 mode showerhead, 682SHSQ = HydroMersion 8" Square, 1 mode showerhead, 432W = Symmons® 1" diameter, 1 mode hand shower, EF-101 = Allura® 3-3/4" diameter, 3 mode hand shower, EF-118 = Symmons® 3-3/4" diameter, 1 mode hand shower, EF-119 = Symmons® 3-3/4" diameter, 3 mode hand shower, and 10262W5 = Symmons® 4-3/4" diameter, 5 mode hand shower.

Dimensions

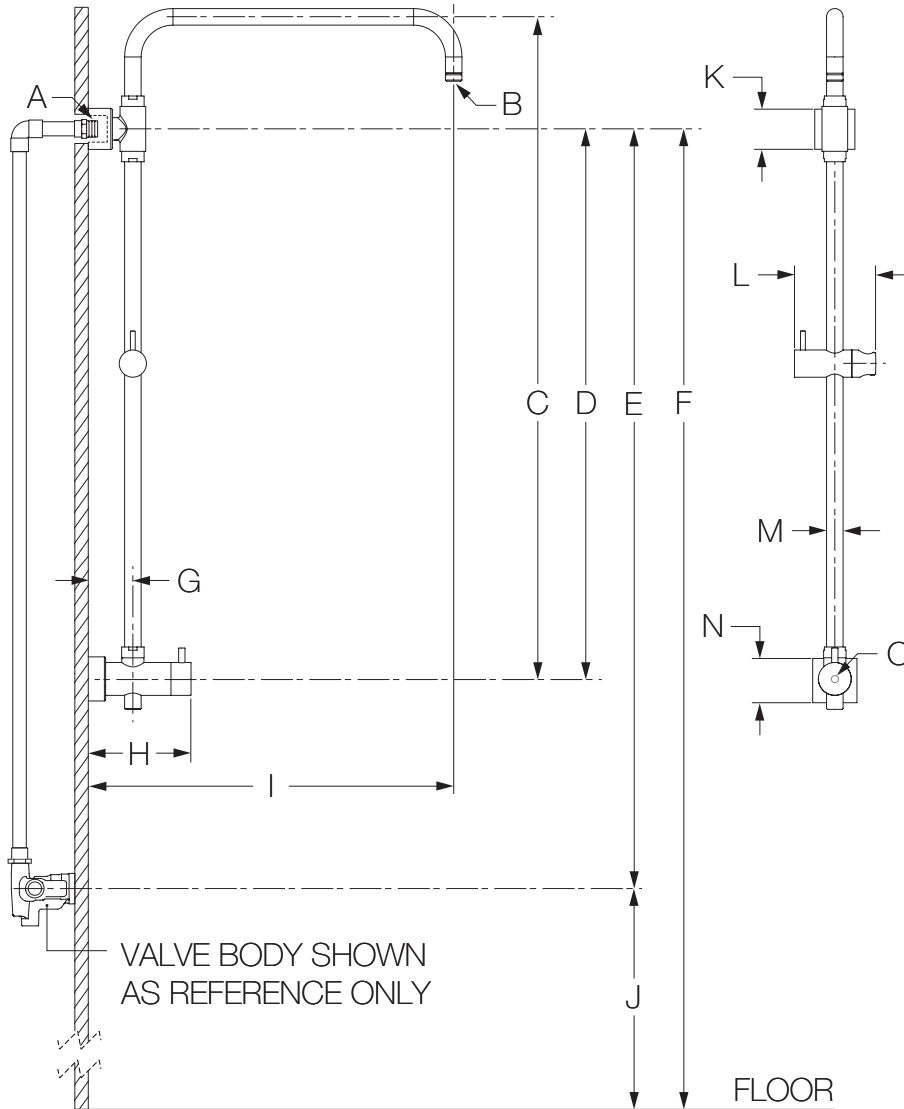

Important Notes:

1) If the distance for item E is less than 29" (737 mm), Exposed Shower Riser is not appropriate for your application.

2) Hand shower wands that exceed 0.8 lbs. are not recommended for Exposed Shower Riser.

Measurements	
A	Male 1/2" NPT thread must protrude 1/2" (13 mm) from finished wall
B	1/2"-14 NPT
C	27-1/2", 699 mm
D	22", 559 mm
E	For Shower Systems: Min. 29", 737 mm from centerline of shower output to valve For Tub/Shower Systems: Min. 29", 737 mm from centerline of shower output to valve
F	Ref. 77", 1956 mm
G	2-3/16", 55 mm
H	5-1/16", 128 mm
I	17-15/16", 456 mm
J	For Shower Systems: Min. 42", 1067 mm Max. 48", 1219 mm For Tub/Shower Systems: Ref. 32", 813 mm
K	Sq. 1-15/16", 49 mm
L	4", 102 mm
M	Ø 13/16", 21 mm
N	Sq. 2-3/16", 56 mm
O	Hole Size Ø 5/16", 8 mm

Note: Dimensions subject to change without notice.