





4-500  
Shower Valve System  
Specification Submittal

Location:




Model Numbers		Feature Highlights
<input type="checkbox"/> <b>4-500</b>	Shower Valve System with Symmons Safetymix mixing valve	<ul style="list-style-type: none"><li>▪ Symmons shower valve system with Symmons Safetymix® pressure balancing mixing valve and lever style handle. Valve includes adjustable stop screw to limit handle turn.</li><li>▪ Polished chrome finish.</li><li>▪ 1/2" Female NPT Inlets and Outlets.</li></ul>
<input type="checkbox"/> <b>4-500-TRM</b>	Shower Valve Trim only, Symmons Safetymix mixing valve ordered separately	
<input type="checkbox"/> <b>4-500-REB-TRM</b>	Rebuild kit, Trim only, includes C-5 flow control spindle and SC-3 hot/cold seat	
Options/ Modifications		Warranty
<input type="checkbox"/> <b>-VP</b>	Vandal resistant escutcheon screws in place of standard screws	<b>Limited Lifetime</b> - for residential installations. <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information. 
<input type="checkbox"/> <b>-X</b>	Integral stops - allows water shut off at valve for service. Recommended for use on all multiple commercial installations	
<input type="checkbox"/> <b>-X-CHKS</b>	Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve	
<b>Note:</b> Append appropriate suffix to model number.		Compliance
		<ul style="list-style-type: none"><li>- ASME A112.18.1/CSA B125.1</li><li>-ASSE 1016</li><li>-Americans with Disabilities Act (ADA)</li></ul> 

## Architectural/ Engineering Specification

Symmons \_\_\_\_\_. Includes Symmons shower valve system with Symmons Safetymix® pressure balancing mixing valve and lever style handle. Valve includes adjustable stop screw to limit handle turn. Polished chrome finish. 1/2" Female NPT Inlets and Outlets. "10 Year Commercial Warranty". ASME A112.18.1/CSA B125.1, ASSE 1016, and Americans with Disabilities Act (ADA) compliant. Available options include "VP -Vandal resistant escutcheon screws", "X - Integral stops - allows water shut off at valve for service" and "X-CHKS - integral check stops".

4-500

## Dimensions

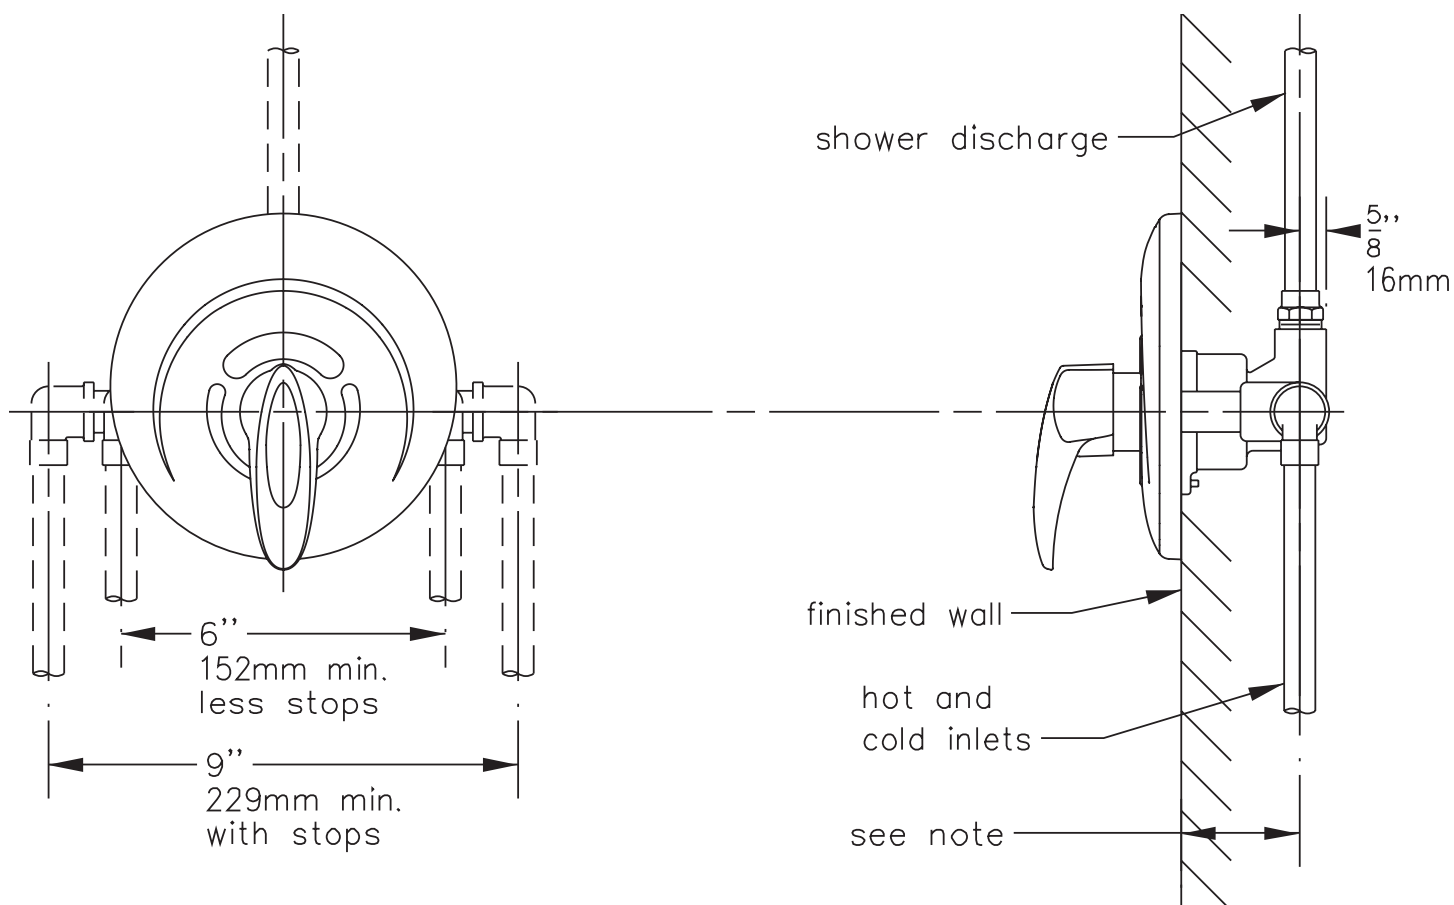

NOTE: 2-3/8" (60mm) min.  
3" (76mm) max. 2-5/16" (59mm)  
fixed dim. metal stall.  
Valve inlets and outlets are  
1/2" (13mm) IPS connections.