SYMMONS® Safetymix®

4-521   Location:
Shower Valve System
Specification Submittal

Model Numbers

☐ **4-521**   Exposed SafetyMix Shower Valve

Feature Highlights

- Symmons Safetymix® Exposed Pressure-Balancing mixing valve with lever handle.
- Adjustable stop screw to limit handle turn.
- Wall flange and integral unions.
- 1/2″ Female NPT Inlets and Outlets.

Options/ Modifications

☐	**-X**	Integral service stops—allows water shut-off at valve for service
☐	**-CX**	Integral check stops
☐	**-W**	Heavy duty wall flange
☐	**-WA**	Heavy duty wall flange with anchor plate
☐	**-L/CAB**	Less Cabinet
☐	**-UH**	With Cabinet

Note: Append appropriate -suffix to model number.

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.

Compliance

- ASME A112.18.1/CSA B125.1.
- ASSE 1016.

Architectural/ Engineering Specification

Symmons Shower Valve System_____Includes Symmons Safetymix® Exposed Pressure-Balancing mixing valve with lever handle. Adjustable stop screw to limit handle turn. Wall flange and integral unions. 1/2″ Female NPT Inlets and Outlets. ″10 Year Commercial Warranty″. ASME A112.18.1/CSA B125.1, ASSE 1016 compliant. Available options include: X = Integral service stops—allows water shut-off at valve for service, CX = Integral check stops, W = Heavy duty wall flange, WA = Heavy duty wall flange with anchor plate, L/CAB = Less Cabinet, and UH = With Cabinet.
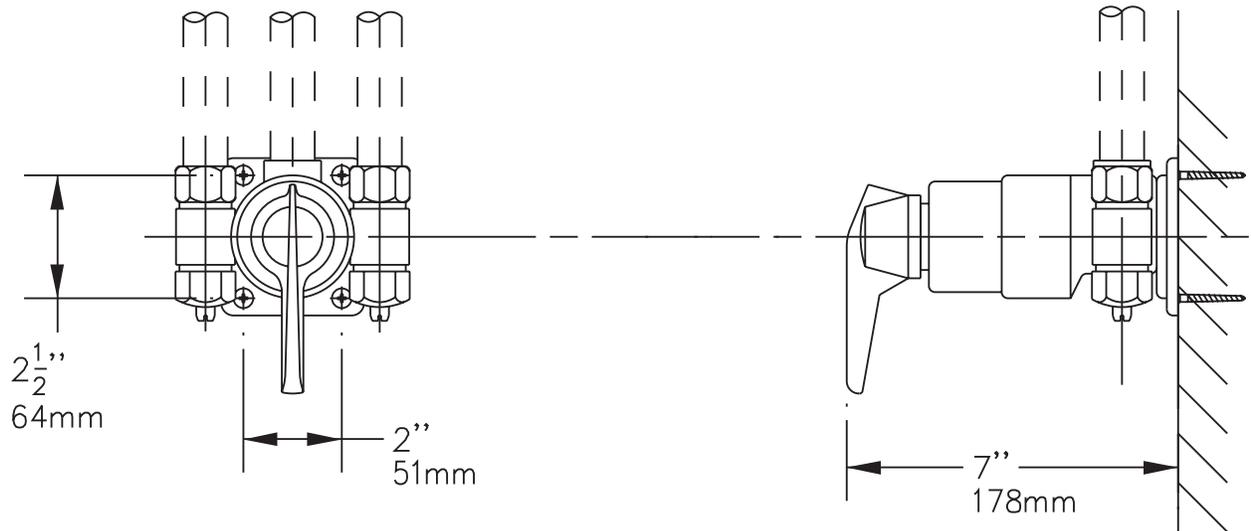
Dimensions

$2\frac{1}{2}$''
64mm

2''
51mm

7''
178mm

Note: Dimensions subject to change without notice.