

Location:



SYMMONS® Origins[®]



9606-PLR, 9606-PLR-TRM, 9606PLR, 9606PLRTRM
Tub/Shower/Hand Shower Trim

Specification Submittal

Feature Highlights

- Origins Tub/Shower/Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with 9606-PLR)
- Requires Symmons Triple Outlet Diverter Valve (included with 9606-PLR)
- Adjustable stop screw to limit handle turn (included with 9606-PLR)
- Metal lever handles
- ADA 36" grab bar for hand shower wand
- 5-1/2" non-diverter tub spout
- Dual checks for backflow protection
- 60" flexible metal hose
- ADA 1 mode hand shower wand with non-positive shutoff
- 1 mode showerhead with easy to clean nozzles
- 2.0 gpm (7.6 L/min) flow restrictors
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9606PLRTRMTC)
- For optional in-line vacuum breaker order p/n EF-109

Model Numbers

- ☐ **9606-PLR**
Tub/Shower/Hand Shower Trim with Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- ☐ **9606PLR**
Tub/Shower/Hand Shower Trim with Temptrol Pressure Balancing Shower Valve (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- ☐ **9606-PLR-TRM**
Tub/Shower/Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- ☐ **9606PLRTRM**
Tub/Shower/Hand Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

Note:

-To create trim sku, follow the format:
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard) -> TRM -> TC (If applicable)
-To create valve & trim sku, follow the format:
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than standard)
-For B and REV modifications, contact customer service for your sku

Options/Modifications

- ☐ **-1.5** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower wand
- ☐ **L3** Less showerhead & hand shower wand
- ☐ **L4** Less head, arm & flange
- ☐ **L6** Less tub spout
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim
- ☐ **-CHKS** Integral check stops
- ☐ **-STN** Satin Nickel finish
- ☐ **-B** Brass escutcheon (chrome only)
- ☐ **-X** Integral service stops - allows water shut-off at valve for service

Compliance

- ASME A112.18.1/CSA B125.1
- Buy American Act (9606-PLR only)
- WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.




Architectural/ Engineering Specification

Symmons Origins _____ With Origins Tub/Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with 9606-PLR), Requires Symmons Triple Outlet Diverter Valve (included with 9606-PLR), Adjustable stop screw to limit handle turn (included with 9606-PLR), Metal lever handles, ADA 36" grab bar for hand shower wand, 5-1/2" non-diverter tub spout, Dual checks for backflow protection, 60" flexible metal hose, ADA 1 mode hand shower wand with non-positive shutoff, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictors, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9606PLRTRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options Include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L4 - Less head, arm & flange", "L6 - Less tub spout", "L7 - Less handle", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

9606-PLR, 9606-PLR-TRM, 9606PLR, 9606PLRTRM

Dimensions

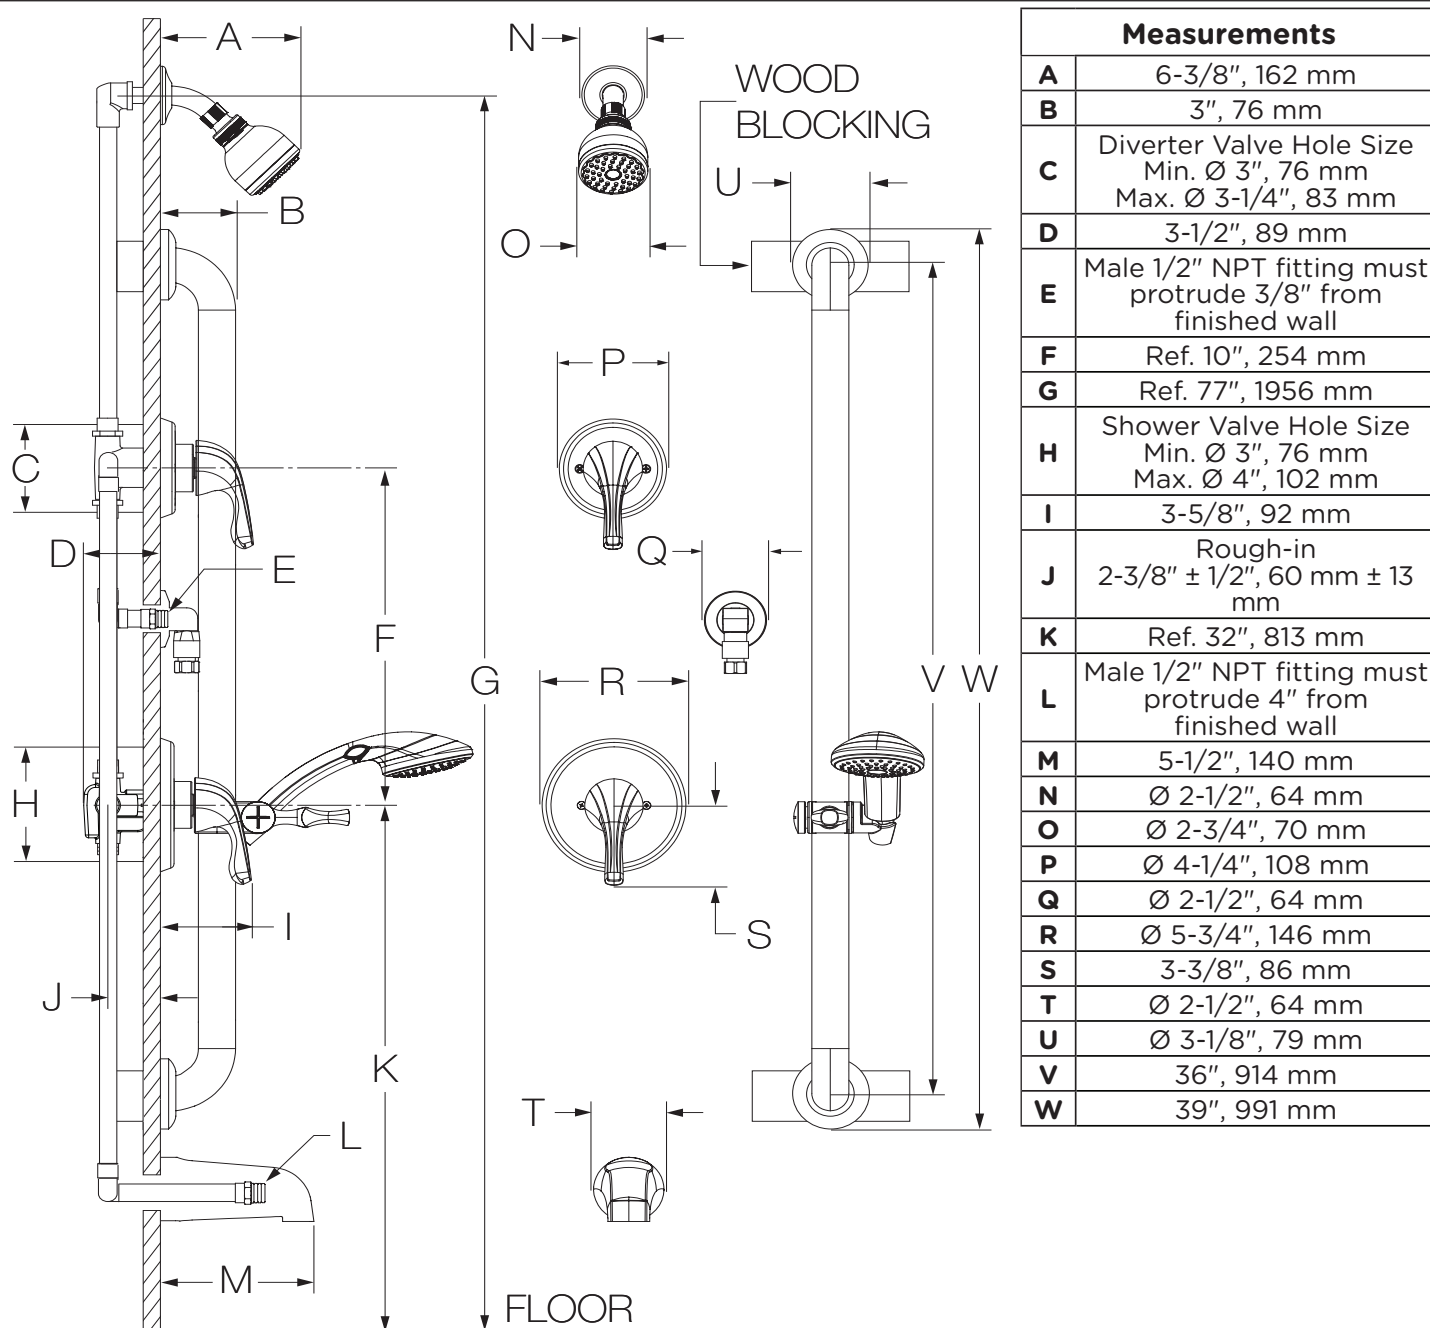

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.