

# Location:




## 5401-TRM, 5401TRMTC Shower Trim Specification Submittal



### Feature Highlights

- Degas Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Metal lever handle
- 1 mode showerhead
- 2.0 gpm (7.6 L/min) flow restrictor
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5401TRMTC)

### Options/Modifications

- ☐ **-1.5**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **-L1** Less showerhead
- ☐ **-STN** Satin Nickel finish

**Note:** Append appropriate -suffix to model number.


### Model Numbers

- ☐ **5401-TRM**  
Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately
- ☐ **5401TRMTC**  
Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap

### Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### Compliance

- ASME A112.18.1/CSA B125.1




### Architectural/ Engineering Specification

Symmons \_\_\_\_\_ With Degas Shower Trim, requires Temptrol® pressure balancing shower valve, metal lever handle, 1 mode showerhead, 2.0 gpm (7.6 L/min) flow restrictor, tub spout not included, components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5401TRMTC). 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, Complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "STN - Satin nickel".



5401-TRM, 5401TRMTC

## Dimension

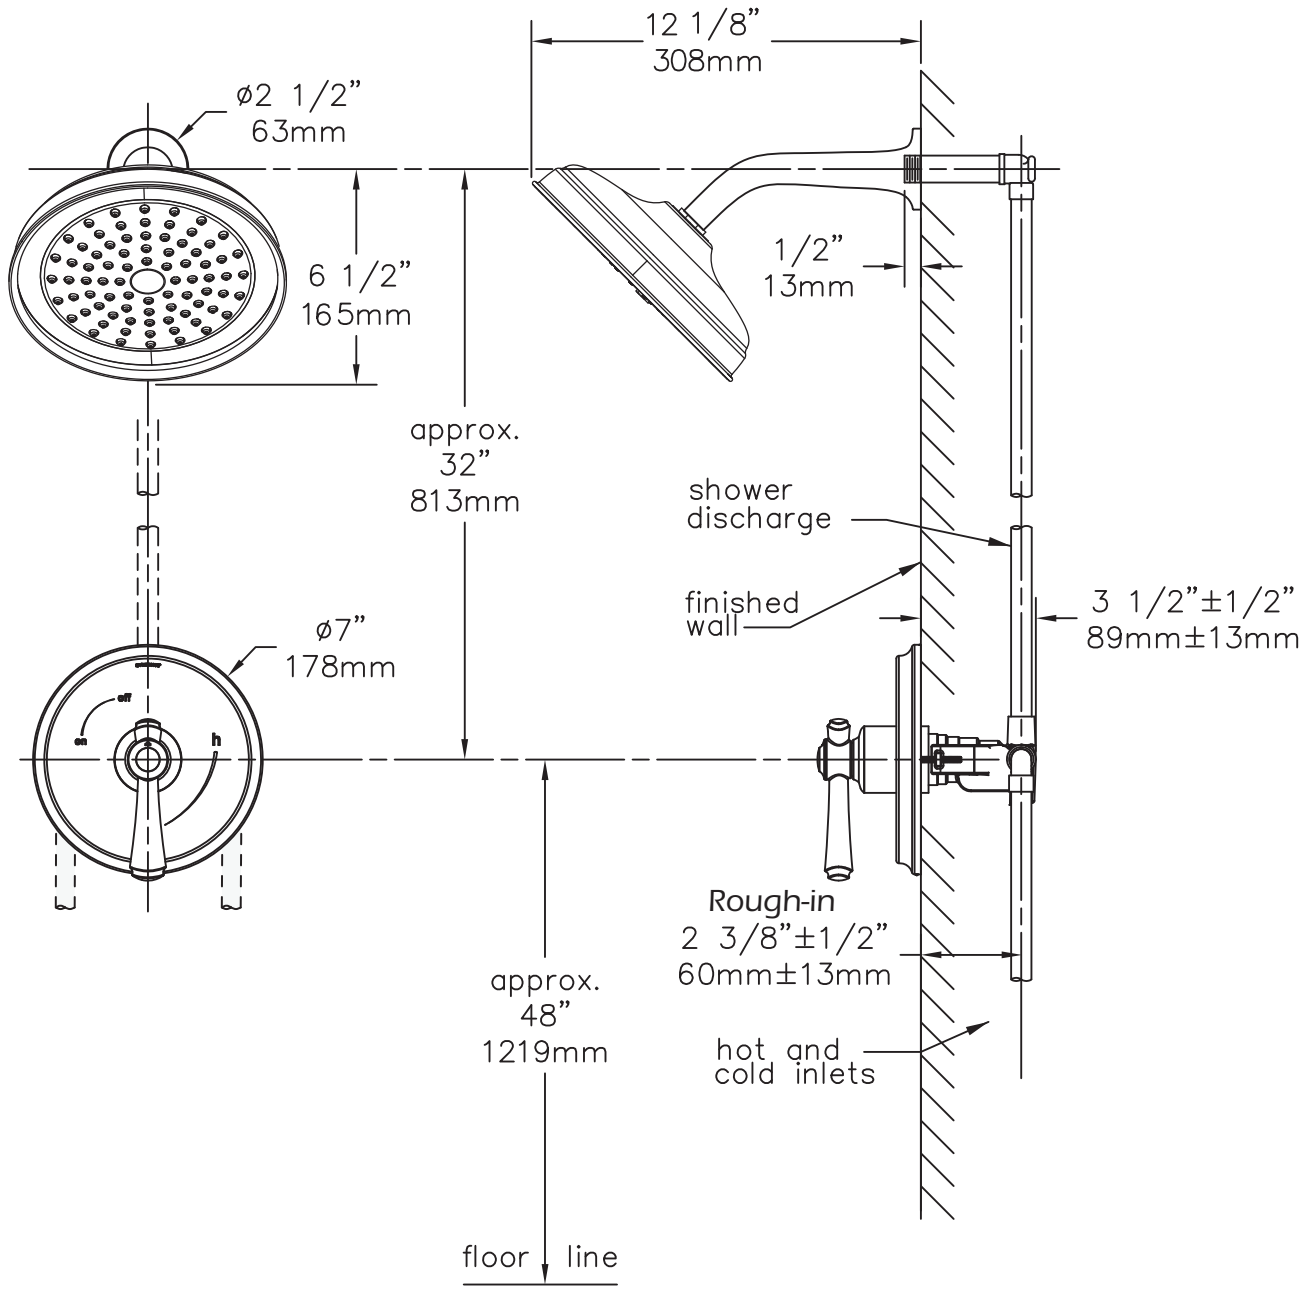

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.