

# Location:



## 4205-TRM, 4205TRMTC Shower/Hand Shower Trim Specification Submittal



### Feature Highlights

- Oxford Shower/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Requires Symmons Dual Outlet Diverter Valve
- Metal lever handles
- Cradle for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 1 mode hand shower wand
- 1 mode showerhead
- Standard 2.0 gpm (7.6 L/min) flow restrictor
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4205TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

### Options/Modifications

- ☐ **1.5** **CG** **1.5 gpm (5.7 L/min) flow restrictor**
- ☐ **L1** **Less showerhead**
- ☐ **L2** **Less hand shower wand**
- ☐ **L4** **Less head, arm and flange**
- ☐ **L5** **Less hand shower system (less bar/cradle, hose, wand, elbow)**
- ☐ **STN** **Satin Nickel finish**

**Note:** Append appropriate -suffix to model number.

### Model Numbers

- ☐ **4205-TRM**  
Shower/Hand Shower Trim,  
Temptrol Pressure Balancing Shower Valve and  
Symmons Dual Outlet Diverter valve ordered separately
- ☐ **4205TRMTC**  
Shower/Hand Shower Trim with TA-10 flow control spindle  
and T-12A cap assembly, must order Temptrol valve with  
Test Cap

### Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.  
**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### Compliance


- ASME A112.18.1/CSA B125.1



## Architectural/Engineering Specification

Symmons Oxford Shower and Hand Shower Trim \_\_\_\_\_ Includes Oxford Shower/Hand Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Requires Symmons Dual Outlet Diverter Valve, Metal lever handles, Cradle for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 1 mode hand shower wand, 1 mode showerhead, Standard 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4205TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L4 - Less head, arm and flange", "L5 - Less hand shower system (less bar/cradle, hose, wand, elbow)", "STN - Satin Nickel finish".

## Dimensions

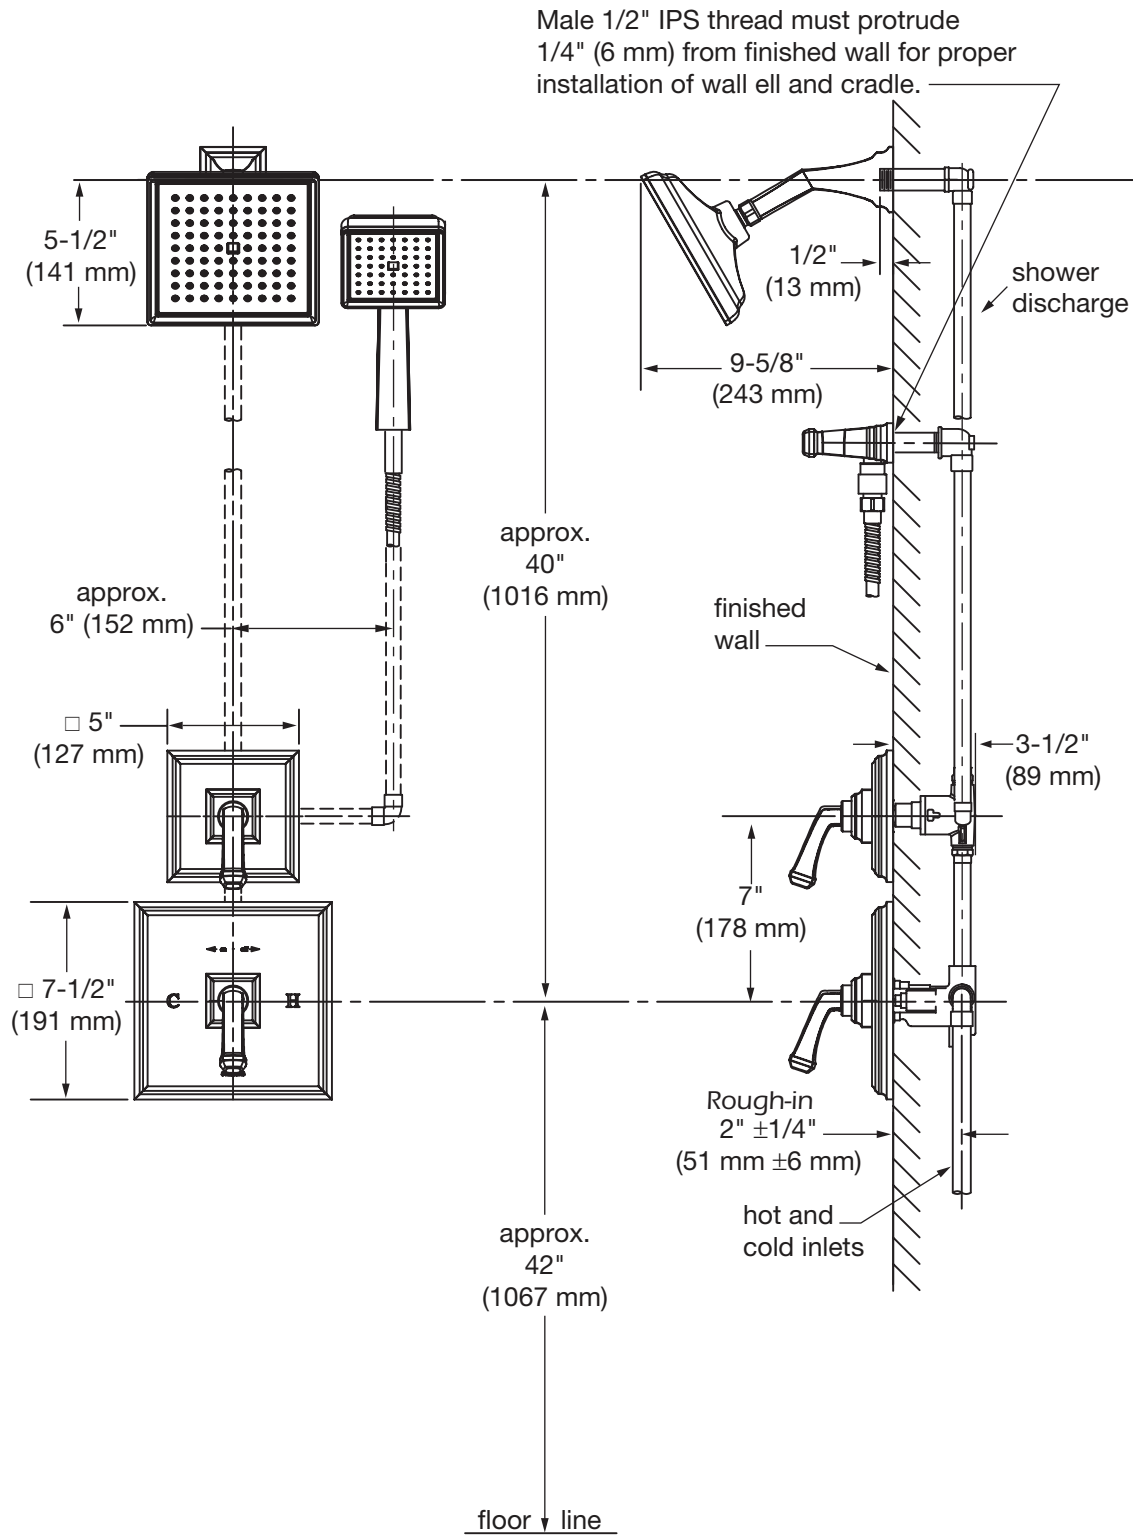

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.