

Location:

SYMMONS® Lucetta™

Shower System 4605 Specification Submittal



Feature Highlights

- Symmons Shower System
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn
- Integral push-button diverter
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- 6 inch rain showerhead #4-163 with mounting arm
- Flow rate 2.5 gpm (9.5 L/min) for both shower head and hand shower
- Metal construction with polished chrome finish

Model Numbers

- 4605 Shower System with Symmons Temptrol® mixing valve and diverter assembly

Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin nickel
- Polished chrome (standard)

Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Options / Modifications


Append appropriate -suffix to model number

- X Service Stops: Temptrol® mixing valve includes integral service stops to allow water
- REV Reverse coring in valve for back to back installations; hot on right, cold on left, (available with -X integral stops only)
-  -2.0 2.0 (7.6 L/min) flow rate restrictor
- L/HD Showerhead not included (Includes showerhead arm only)
- L/HS Hand Shower wand not included (Includes hose, in-line vacuum breaker, wall connections and flange only)
- R Vinyl hose in place of flexible metal hose
- 72 6 foot hose in place of standard 5 foot hose
- QD Quick-disconnect at hand shower wall connection

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Lucetta shower system, 4605*

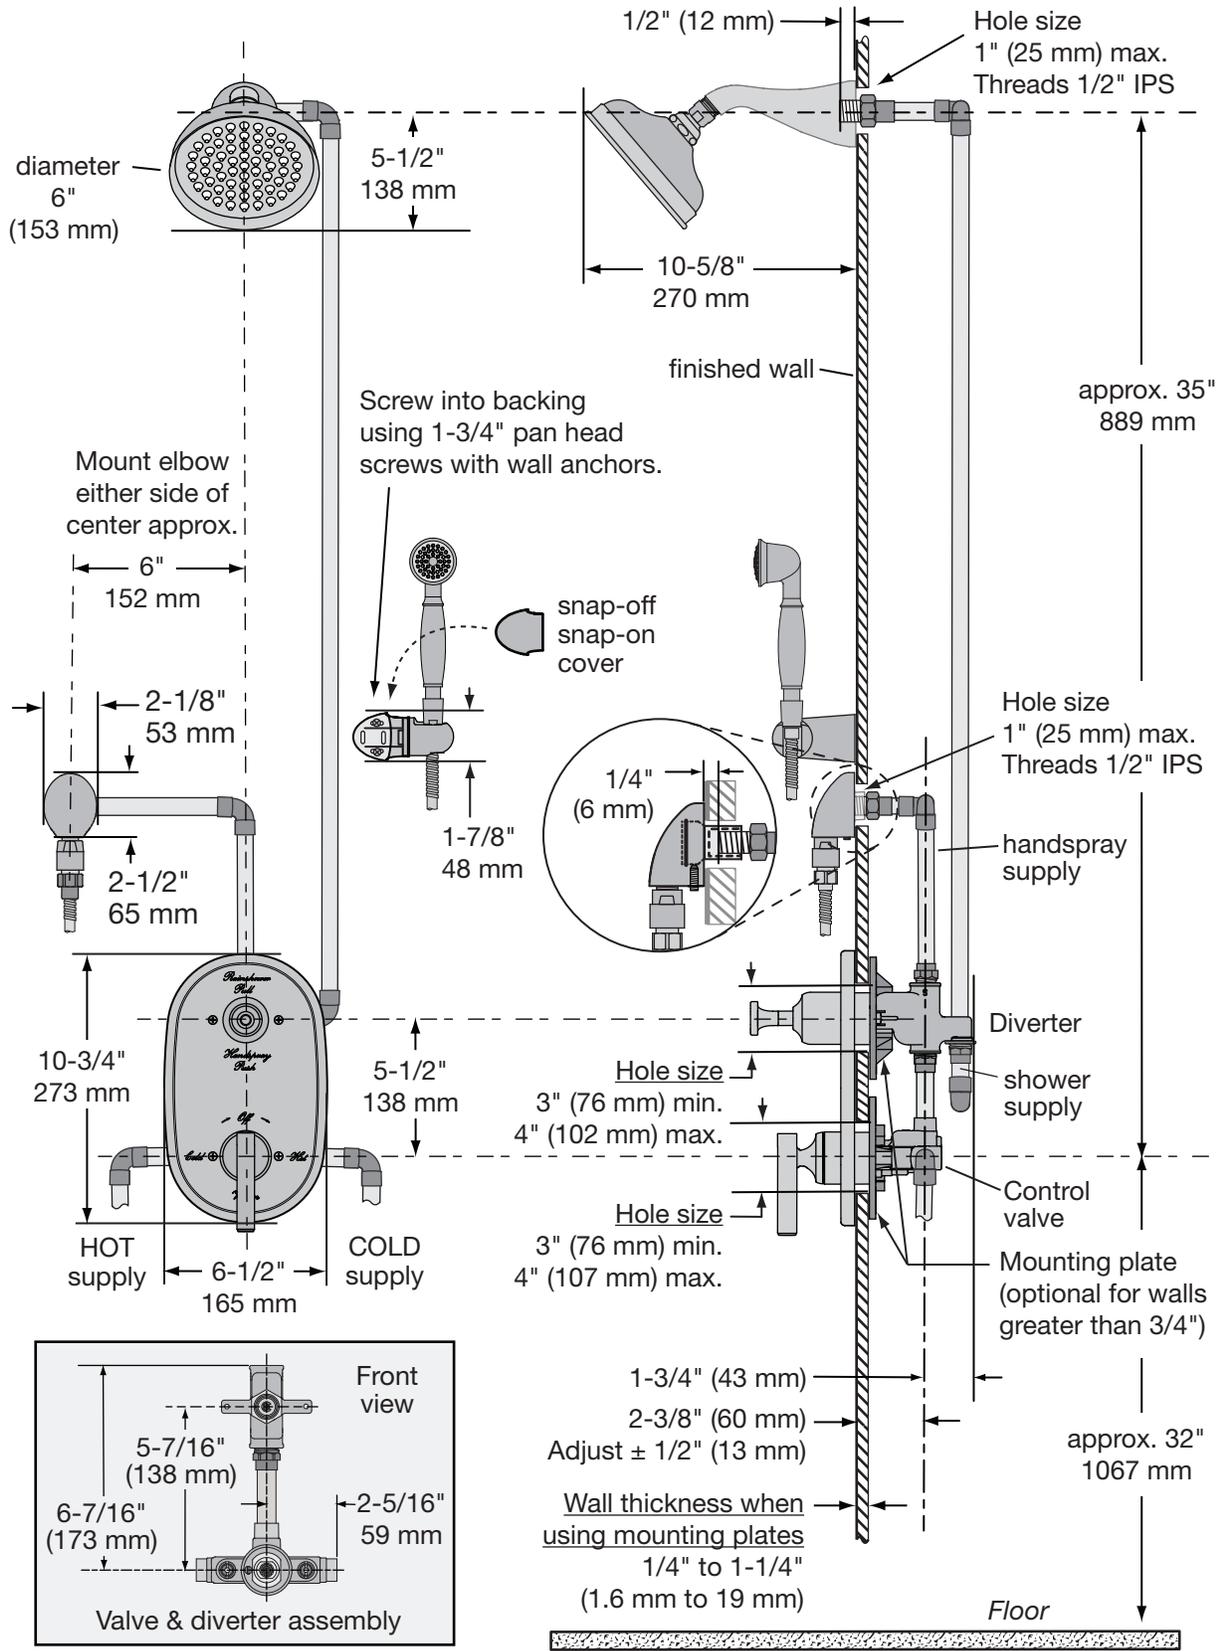

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2008 Symmons Industries, Inc. Printed in U.S.A. ■ 090710

