

Location:



Showerhead 352SH-3 Specification Submittal



Feature Highlights

- 3 mode, ball joint connection
- Standard flow rate is 2.0 gpm (7.6 L/min)
Optional lower flow rate restrictor available
- Polished Chrome finish (standard)

Model Numbers

- ☐ **352SH-3**..... Showerhead

Standards / Certifications

- ASME A112.18.1/CSA B125.1
- WaterSense 2.0 gpm (7.6 L/min)
1.5 gpm (5.7 L/min)



Options / Modifications


Append appropriate -suffix to model number

- ☐ **CC -1.75** **1.75 gpm (6.6 L/min) flow rate restrictor**
- ☐ **CC -1.5** **1.5 gpm (5.7 L/min) flow rate restrictor**
- ☐ **-STN** **Satin Nickel finish**

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.


10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/Engineering Specification

Symmons Showerhead _____ Includes 3 mode, ball joint connection, Standard flow rate is 2.0 gpm (7.6 L/min), Optional lower flow rate restrictor available, Polished Chrome finish (standard). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 2.0 gpm (7.6 L/min), WaterSense 1.75 gpm (6.6 L/min), WaterSense 1.5 gpm (5.7 L/min) compliant. Available options: "1.75 - 1.75 gpm (6.6 L/min) flow rate restrictor", "1.5 - 1.5 gpm (5.7 L/min) flow rate restrictor", "STN - Satin Nickel finish".

Dimensions Showerhead, 352SH-3

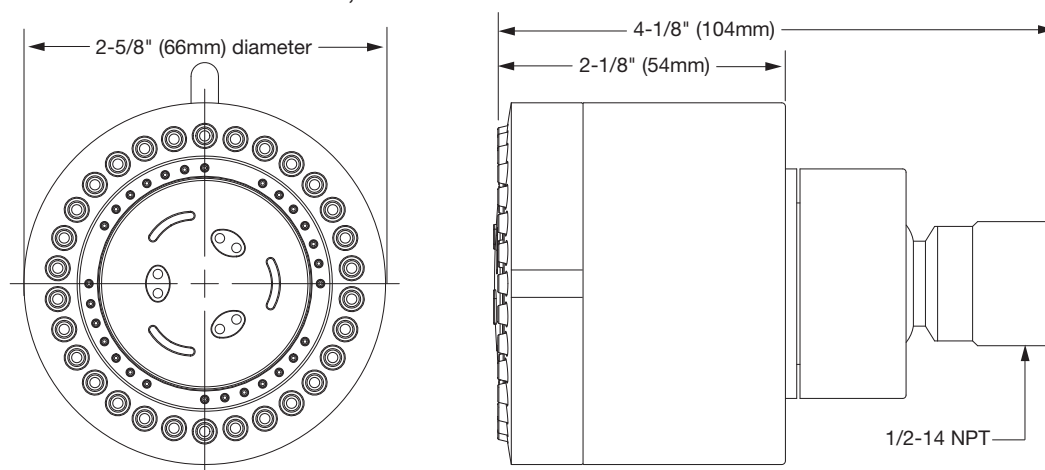

Note: Dimensions subject to change without notice.