

# Location:



**SYMMONS® Winslet**

5105-TRM, 5105TRMTC  
Shower/Hand Shower Trim  
**Specification Submittal**




## Feature Highlights

- Winslet Shower/Hand Shower Trim
- Requires Temptrol® Pressure Balancing Shower Valve
- Requires Symmons Dual Outlet Diverter Valve
- Metal lever handles
- Cradle for hand shower wand
- Dual checks for backflow protection
- 60" flexible metal hose
- 1mode hand shower wand
- 1 mode showerhead
- 2.0 gpm (7.6 L/min) flow restrictors
- Tub spout not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5105TRMTC)
- For optional in-line vacuum breaker order p/n EF-109

## Model Numbers

- ☐ **5105-TRM**  
Shower/Hand Shower Trim,  
Temptrol Pressure Balancing Shower Valve and  
Symmons Dual Outlet Diverter valve ordered separately
- ☐ **5105TRMTC**  
Shower/Hand Shower Trim with TA-10 flow control spindle  
and  
T-12A cap assembly, must order Temptrol valve with Test  
Cap

## Options/Modifications

- ☐ **-1.5**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **-L1** Less showerhead
- ☐ **-L2** Less hand shower wand
- ☐ **-L3** Less showerhead & hand shower wand
- ☐ **-L5** Less hand shower system
- ☐ **-STN** Satin Nickel Finish

**Note:** Append appropriate -suffix to model number.

## Compliance

- ASME A112.18.1/CSA B125.1



## Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.




## Architectural/Engineering Specification

Symmons Winslet \_\_\_\_\_ With Winslet Shower/Hand Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Requires Symmons Dual Outlet Diverter Valve, Metal lever handles, Cradle for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 1mode hand shower wand, 1 mode showerhead, 2.0 gpm (7.6 L/min) flow restrictors, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 5105TRMTC), For optional in-line vacuum breaker order p/n EF-109, 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, complaint. Available options include: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "L1 - Less showerhead", "L2 - Less hand shower wand", "L3 - Less showerhead & hand shower wand", "L5 - Less hand shower system", "STN - Satin Nickel Finish".

5105-TRM, 5105TRMTC

## Dimensions

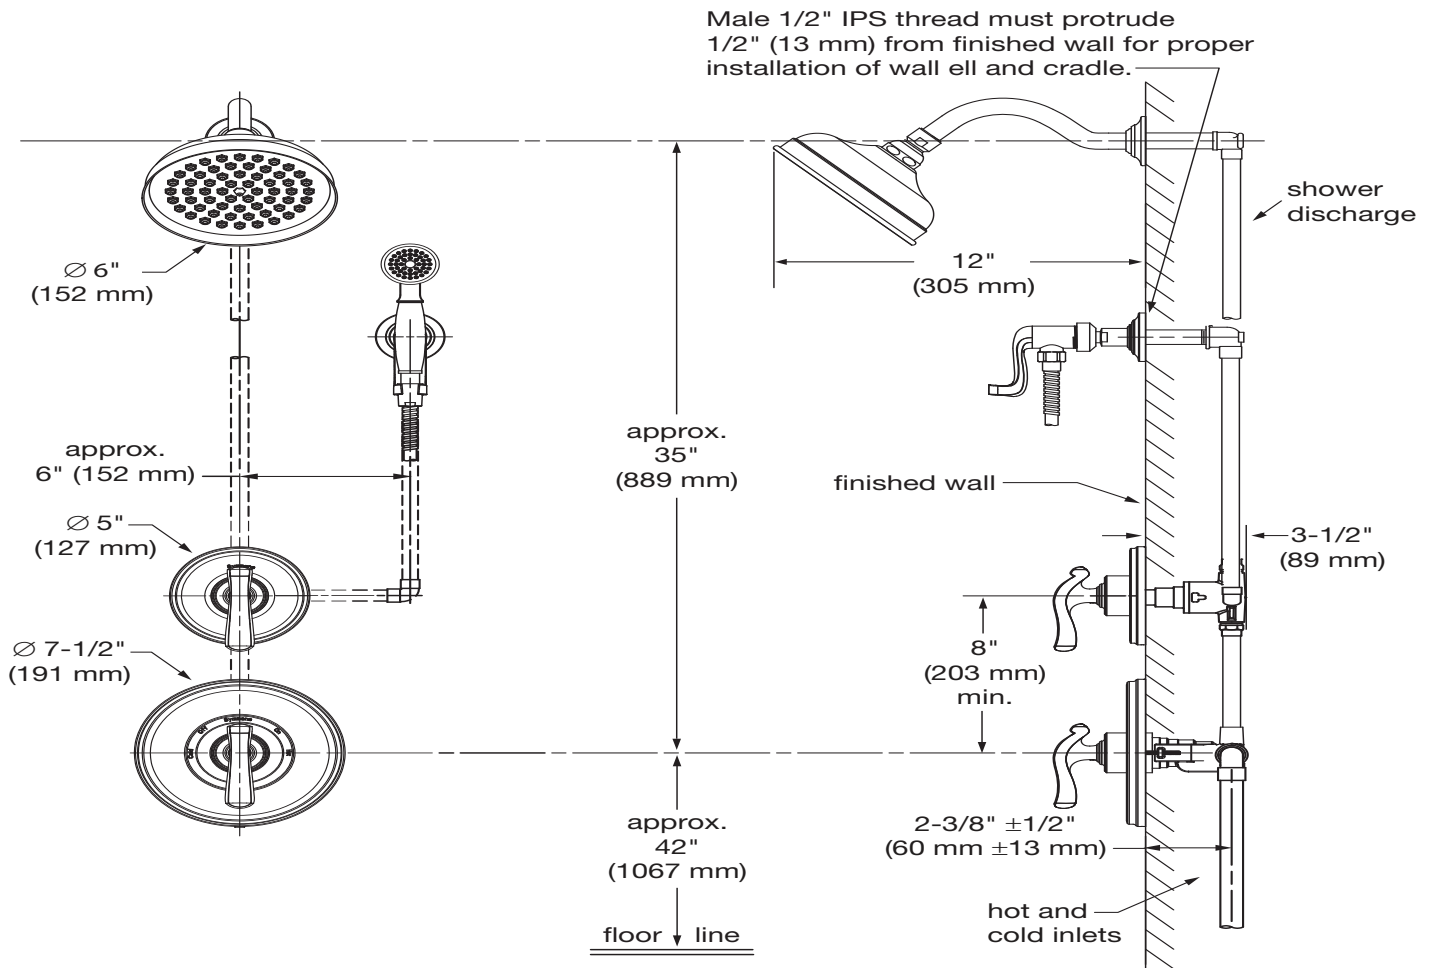

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.