



6791TRM
Shower Trim

Location:



Specification Submittal

Model Numbers

- 6791TRM**
Shower Trim
- Valve Options:**
-261 Series Temptrol® Shower Valve with TRM modifier
-161 Series Temptrol Shower Valve requires TC modifier

Feature Highlights


- Identity Shower Trim.
- Requires Temptrol Pressure-Balancing Shower Valve.
- Metal lever handle.
- Single-mode HydroMersion™ showerhead.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operations.



Options/Modifications

- 15**  1.5 gpm (5.7 L/min) flow restrictor
- L1** Less showerhead
- L7** Less handle
- 1L** 1-Inch Spindle Extension
- TC** Test Cap Trim (includes TA-10™ & T-12A) *used with series 161 Series Temptrol Shower Valve*
- BBZ** Brushed Bronze finish
- MB** Matte Black finish
- STN** Satin Nickel finish

Warranty

Limited Lifetime - for residential installations.

10 Years - for commercial/industrial installations.

Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
6791	MB	L1		TRM	TC	1L	6791MBL1TRMTC1L
6791	BBZ		15	TRM			6791BBZ15TRM

Note: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Identity Shower Trim _____ includes Identity Shower Trim for Temptrol Pressure-Balancing Valve. Features metal lever handle, single-mode HydroMersion showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min) compliant. Lever Handle meets ADA requirements for operation. Available options include: 1L = 1-Inch Spindle Extension, 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

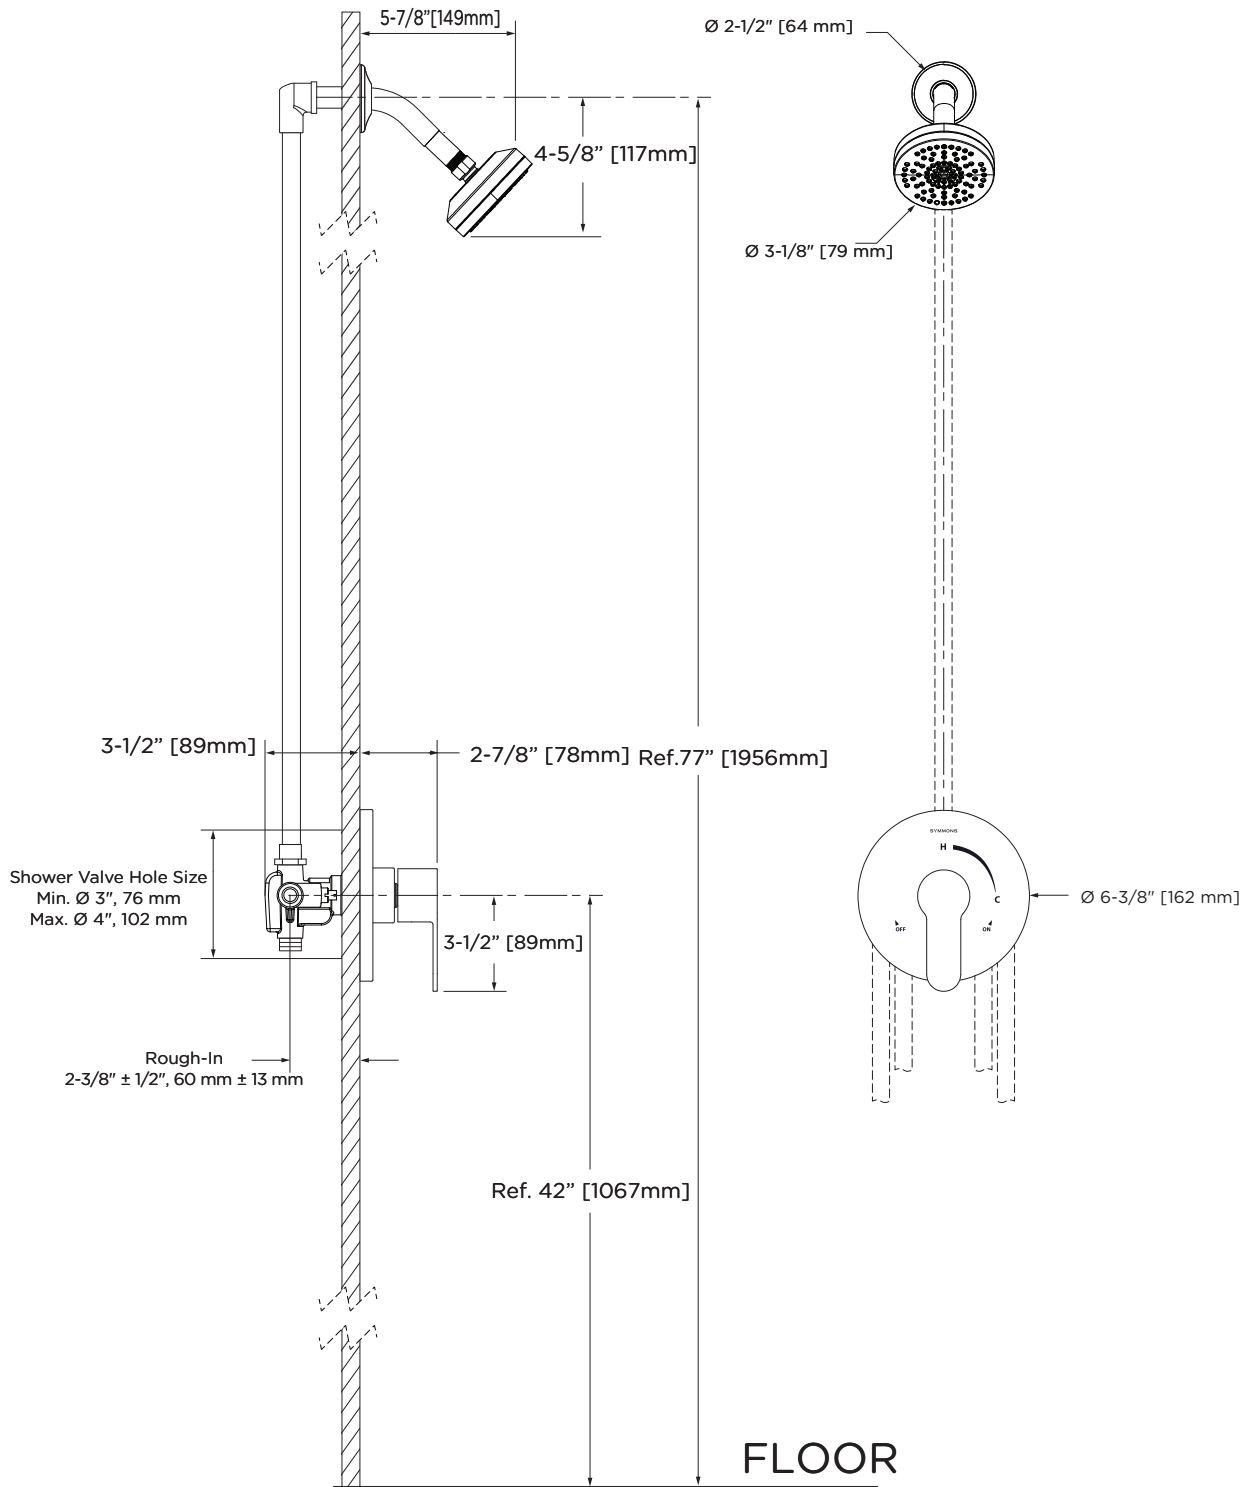

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.