



SLS5512PP
Lavatory Faucet
Specification Submittal

Location:

Model Numbers

- SLS5512PP** Lavatory Faucet with Push Pop Drain Assembly

Options/ Modifications

- STN Satin Nickel finish
- MB Matte Black finish
- BBZ Brushed Bronze finish
- O5 Aerator flow restrictor, 0.5 GPM (1.9 L/min)

Note: Append appropriate suffix to model number.

Compliance

- ASME A112.18.1/CSA B125.1.
- NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372.
- WaterSense 1.0GPM (3.8 L/min).



Feature Highlights

- Single post round lavatory faucet with swivel lever handle.
- Single hole deck mounting and optional 4" deck plate.
- Single lever cartridge with ceramic control components.
- 3/8" copper supply lines with 1/2" IPS fittings.
- Aerator with standard 1.0 GPM flow rate (3.8 L/min).
- Metal construction.
- Polished Chrome finish (standard).

Warranty


Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
 Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons Elm Lavatory Faucet _____ With single post round lavatory faucet with swival lever handle, single hole deck mounting and optional 4" deck plate, single lever cartridge with ceramic control components, 3/8" copper supply lines with 1/2" IPS fittings, aerator with standard 1.0 GPM flow rate (3.8 L/min), metal construction. Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372, WaterSense 1.0 GPM(3.8 L/min), complaint. Available options include: STN = Satin nickel finish, MB = Matte Black finish, BBZ = Brushed Bronze finish, and O5 = Aerator flow restrictor, 0.5 GPM (1.9 L/min).

Dimensions

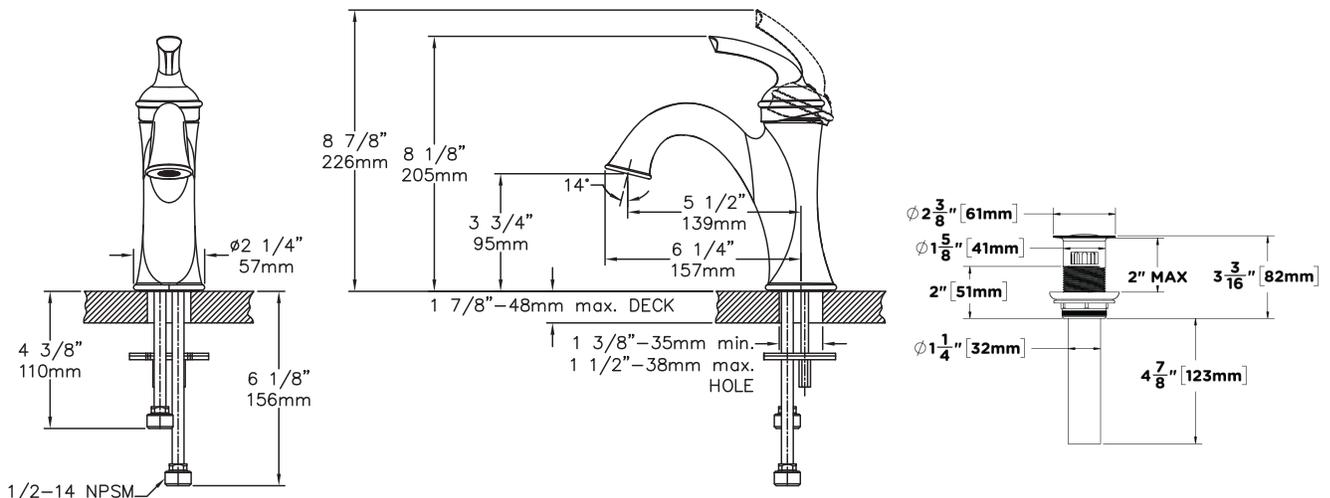

Note: Dimensions subject to change without notice.