

S5894TRM
Tub/Hand Shower Trim
Specification Submittal

Location:

Model Numbers

- ☐ **S5894TRM**
Tub/Shower Trim
- Valve Options:**
-S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
-S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

Feature Highlights

- Braston® Tub/Hand Shower Trim.
- Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 7" non-diverter tub spout.
- 30" slide bar for hand shower.
- 60" flexible metal hose.
- 7-mode HydromMersion™ hand shower with NSPO.
- Dual checks for backflow protection.
- 2.0 gpm (7.6 L/min) flow restrictor.
- Components made from metal and nonmetal materials, plated in standard Polished Chrome finish.

Compliance

- ASME A112.18.1/CSA B125.1.
- WaterSense 1.5 gpm (5.7 L/min) / 2.0 gpm (7.6 L/min).
- Lever handle and hand shower meet ADA requirements for operation.



Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Modifications

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L2** Less handshower
- ☐ **L5** Less hand shower system
- ☐ **L6** Less tub spout
- ☐ **L7** Less handle
- ☐ **BBZ** Brushed Bronze finish
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish
- ☐ **TC** Test Cap Trim (includes TA-10&T-12A) used with S162 Series Temptrol VersaFlex Valve

Note: Append appropriate suffix to model number.

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S5894	MB	L1		TRM	TC	S5894MBL1TRMTC
S5894	MB			TRM		S5894MBTRM

Note: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Braston® Tub/Hand Shower Trim _____ Includes Braston® Tub/Hand Shower Trim powered by Temptrol VersaFlex Pressure-Balancing Shower Valve, integral diverter control. Features include metal lever handle, 7" non-diverter tub spout, 30" slide bar for hand shower, 60" flexible metal hose, 7-mode HydromMersion™ hand shower with NSPO, dual checks for backflow protection, 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials, plated in standard Polished Chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.5/2.0 complaint. Lever handle and hand shower meet ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L2 = Less handshower, L5 = Less hand shower system, L6 = Less tub spout, L7 = Less handle, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and TC = Test Cap Trim.

Dimensions

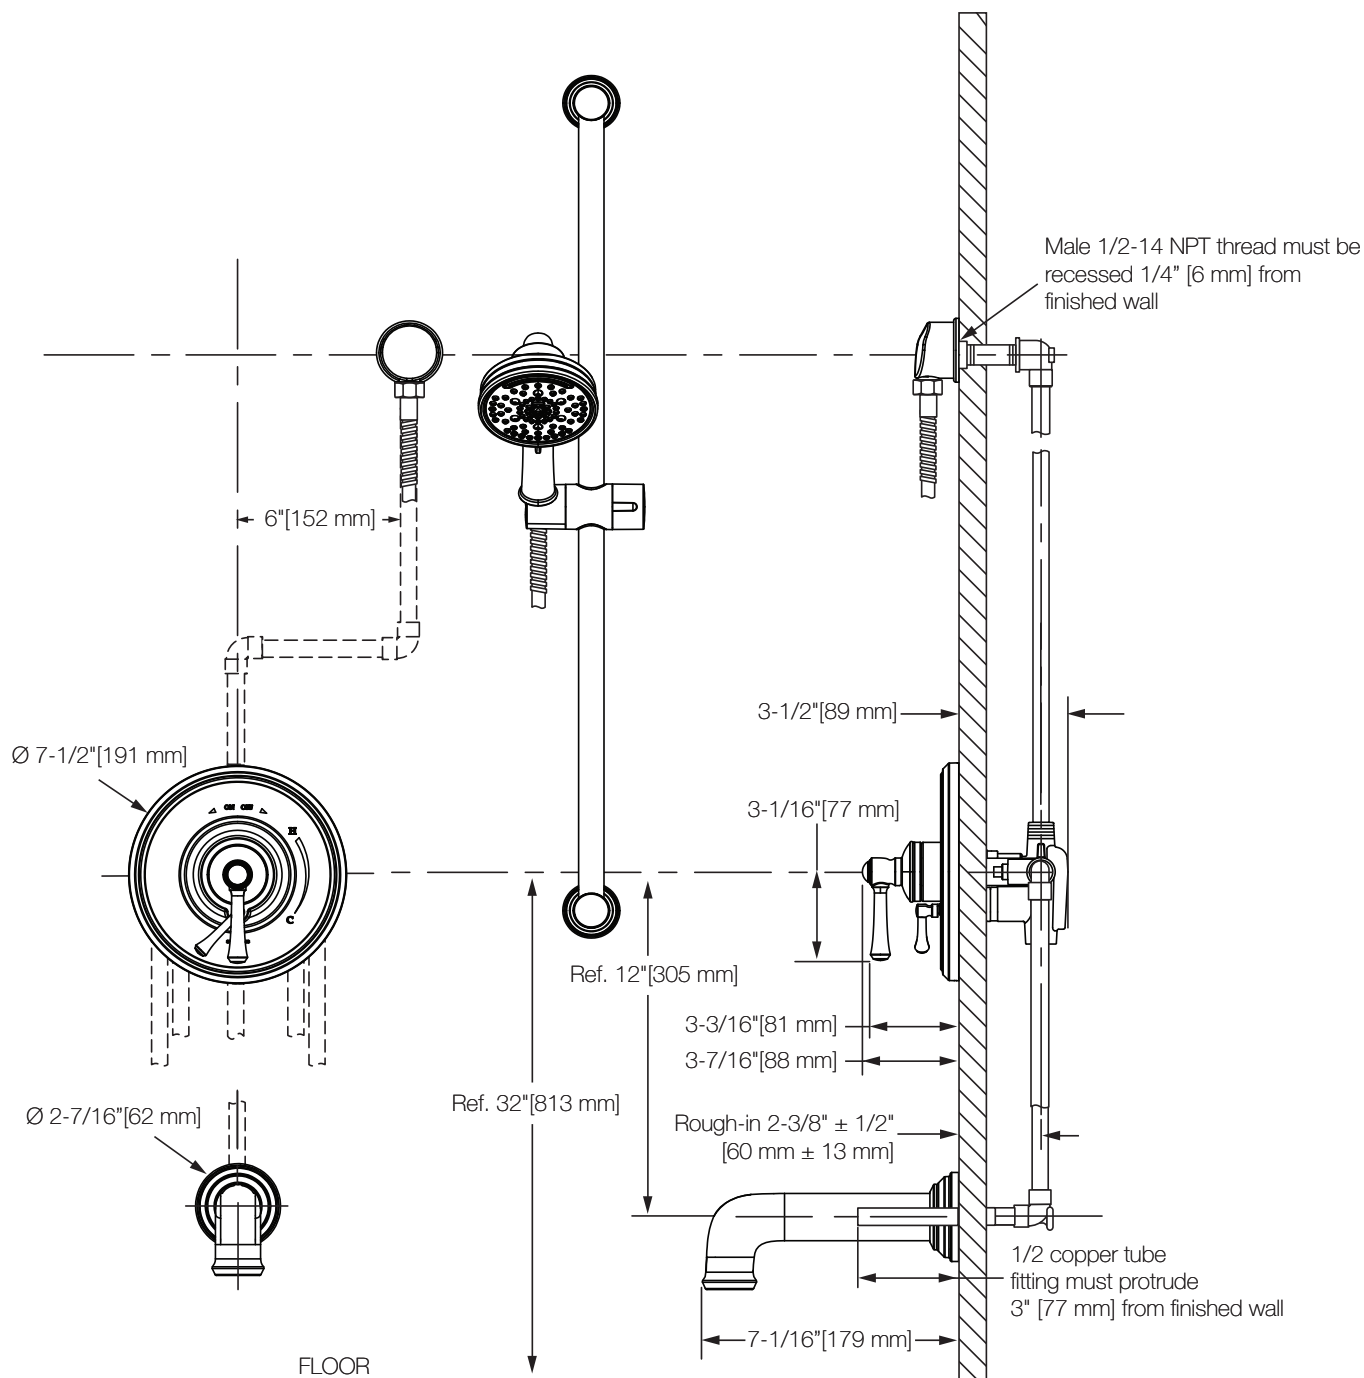

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see 2-3/8" ± 1/2" [60 mm ± 13 mm] as reference).
- 4) Dimensions subject to change without notice.