





Location:



SLW3622CA Two Handle Widespread Lavatory Faucet Specification Submittal




Model Numbers	Feature Highlights
<input type="checkbox"/> SLW3622CA Two Handle Widespread Lavatory Faucet with lift rod and metal drain assembly	<ul style="list-style-type: none"> • 8" to 16" mount configuration • Quarter turn ceramic cartridges • 4" height • Standard 1.0 gpm (3.8 L/min) flow rate • Faucet shall be metal construction, plated in standard polished chrome finish
Options/ Modifications	
<input type="checkbox"/> H2  Alternative lever handle (Chrome and Satin Nickel only)	Warranty
<input type="checkbox"/> STN Satin Nickel finish	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 
<p>Note: Append appropriate suffix to model number.</p>	
Compliance <ul style="list-style-type: none"> - ASME A112.18.1/CSA B125.1 - NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 - WaterSense 1.0 gpm (3.8 L/min)  	

Architectural/ Engineering Specification

Symmons Duro Two Handle Widespread Lavatory Faucet _____ With 8" to 16" mount configuration, Quarter turn ceramic cartridges, 4" height, Standard 1.0 gpm (3.8 L/min) flow rate, Faucet shall be metal construction, plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI/CAN 61: Q<1, NSF/ANSI 372 , WaterSense 1.0 gpm (3.8 L/min), complaint. Available options include: "H2 - Alternative lever handle (Chrome and Satin Nickel only)", "STN - Satin Nickel finish".

SLW3622CA

Dimensions

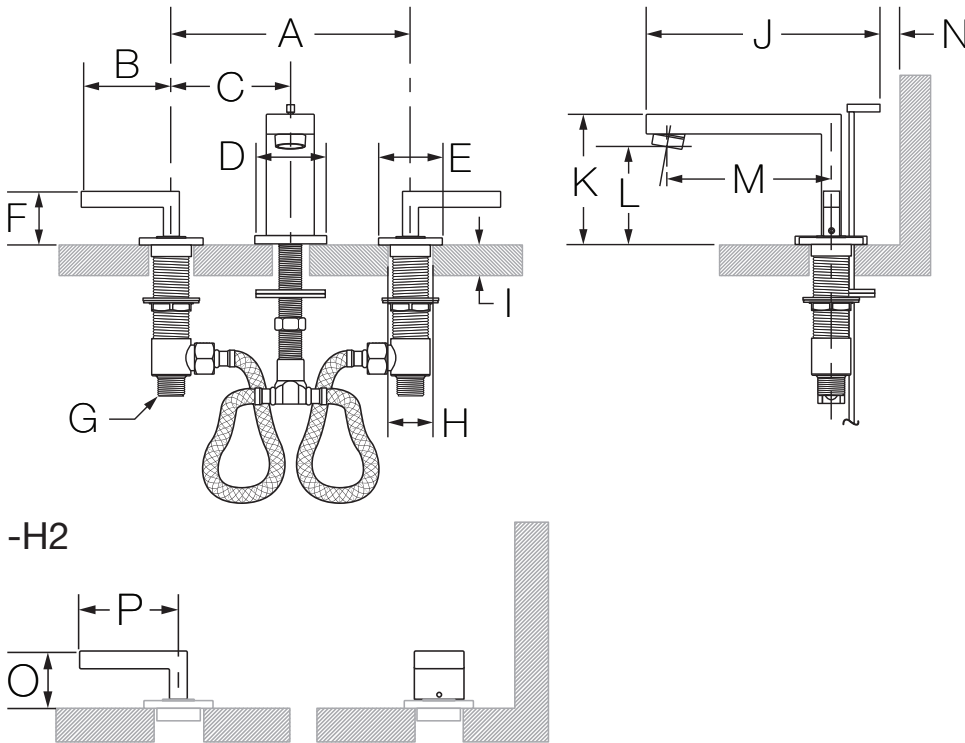

Measurements	
A	Min. 8", 203 mm Max. 16", 406 mm
B	2-3/4", 70 mm
C	4", 102 mm
D	2-1/8", 54 mm
E	2", 51 mm
F	1-5/8", 40 mm
G	1/2-14 NPSM
H	(3x) Hole size Min. Ø 1-1/4", 32 mm Max. Ø 1-3/8", 35 mm
I	Deck Thickness Ref. Min. 7/8", 22 mm Max. 2-3/8", 60 mm
J	6-3/8", 161 mm
K	4", 102 mm
L	3", 76 mm
M	5", 127 mm
N	Min. 1/2", 13 mm
O	1-5/8", 41 mm
P	2-3/4", 70 mm

Note: Dimensions subject to change without notice.