

Location:



Shower System 5201

Specification Submittal

Feature Highlights

- Symmons shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Shower head with mounting bracket
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available 
- Polished chrome finish

Model Numbers

- ☐ 5201.....Shower System with Symmons Temptrol® pressure balancing mixing valve, p/n 4000-BODY
- ☐ 5201-TRM.....Trim only, valve must be ordered separately
- ☐ 4000-BODY.....Symmons Temptrol® pressure balancing mixing valve without trim
- ☐ 4000-X-BODY.... Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.

Finish Options / Modifications

Append appropriate -suffix to model number.

- ☐ -STN Satin nickel
- ☐ -BBZ Brushed Bronze
- Polished chrome (standard finish)



Options / Modifications

Append appropriate -suffix to model number.

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 5201.)
- ☐  -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐  -1.5 1.5 (5.7 L/min) Flow rate restrictor


Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Ballina Shower System, 5201*

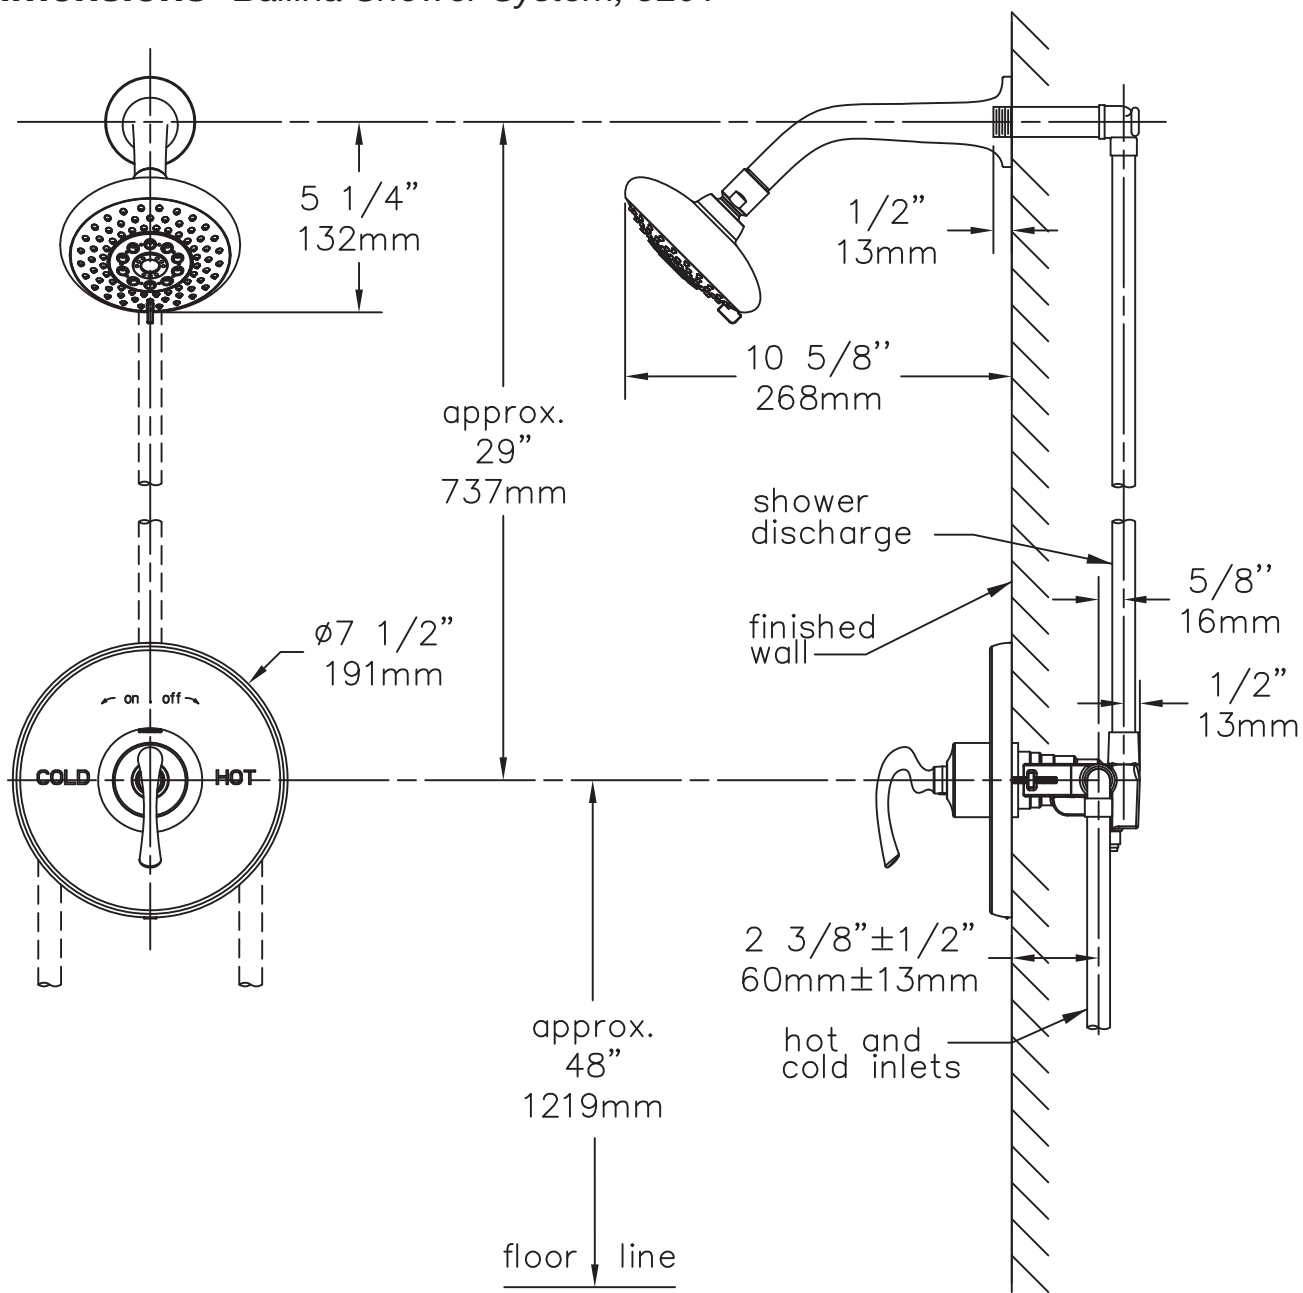

Note: Dimensions subject to change without notice.