


Location:

# SYMMONS® Ballina™

## Hand Shower System 5203

### Specification Submittal

#### Feature Highlights

- Symmons hand shower system with lever handles.
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Wall/hand shower with 5 foot flexible metal hose, in-line vacuum breaker, wall connection and cradle for hand shower mounting
- Standard flow rate is 2.5 gpm (9.5 L/min)  
*Optional lower flow rate restrictor available* 
- Polished chrome finish

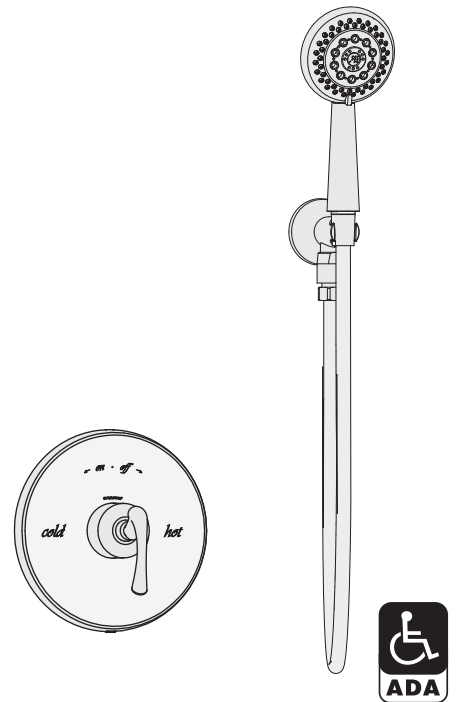
#### Model Numbers

- ☐ 5203.....Hand Shower System with Symmons Temptrol® pressure balancing mixing valve  
p/n 4000-BODY
- ☐ 5203-TRM.....Trim only, valve must be ordered separately
- ☐ 4000-BODY.....Symmons Temptrol® pressure balancing mixing valve without trim
- ☐ 4000-X-BODY....Symmons Temptrol® pressure balancing mixing valve without trim. Valve includes integral service stops to allow water shut-off for service.

#### Finish Options / Modifications



*Append appropriate -suffix to model number.*

- ☐ -STN Satin nickel
- ☐ -BBZ Brushed Bronze
- Polished chrome (standard finish)



#### Options / Modifications

*Append appropriate -suffix to model number.*

- ☐ -IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- ☐ -X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service, p/n 4000-X-BODY. (Option only applies when ordering model 5203.)
- ☐  -2.0 2.0 (7.6 L/min) Flow rate restrictor
- ☐  1.5 1.5 (5.7 L/min) Flow rate restrictor

#### Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

#### Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

## Dimensions *Ballina Hand Shower System, 5203*

Male 1/2" I.P.S. thread must protrude 1/2" (13mm) from finished wall for proper installation of wall ell and cradle.

