







S-4702-TRM, S4702TRM
Tub/Shower Trim

Location:

Specification Submittal

Model Numbers	Options/Modifications
<ul style="list-style-type: none"><input type="checkbox"/> S-4702-TRM Tub/Shower Trim (modifiers include decimal points and hyphens)<input type="checkbox"/> S4702TRM Tub/Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points) <p>Valve Options:</p> <ul style="list-style-type: none">-S262 Series Temptrol® VersaFlex™ Shower Valve used with TRM modifiers-S162 Series Temptrol VersaFlex Shower Valve requires TC modifier	<ul style="list-style-type: none"><input type="checkbox"/> -1.5 1.5 gpm (5.7 L/min) flow restrictor<input type="checkbox"/> -1.75 1.75 gpm (6.62 L/min) flow restrictor<input type="checkbox"/> L1 Less showerhead<input type="checkbox"/> L4 Less head, arm, and flange<input type="checkbox"/> L7 Less handle<input type="checkbox"/> -STN Satin Nickel finish<input type="checkbox"/> TC Test Cap Trim (includes TA-10™ & T-12A) <i>used with S162 Series Temptrol VersaFlex Shower Valve</i>
Feature Highlights	Warranty
<ul style="list-style-type: none">• Allura Tub/Shower Trim.• Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.• Integral diverter control.• Metal lever handle.• 5-1/4" non-diverter tub spout.• 3-mode showerhead.• Standard 2.0 gpm (7.6 L/min) flow restrictor.• Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.	<p>Limited Lifetime - for residential installations.</p> <p>10 Years - for commercial/industrial installations.</p> <p>Refer to www.symmons.com/warranty for complete warranty information.</p> 
	Compliance
	<ul style="list-style-type: none">-ASME® A112.18.1/CSA® B125.1-WaterSense® 1.75 gpm (6.62 L/min)-Lever handle meets ADA requirements for operation-1.5 gpm and 1.75 gpm option meets CALGreen requirements <div></div>

SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S-4702-	STN		1.5	TRM		S-4702-STN-1.5-TRM
S4702		L7		TRM	TC	S4702L7TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Allura _____ includes Allura Tub/Shower Trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features integral diverter control, metal lever handle, 5-1/4" non-diverter tub spout, 3-mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.75 compliant. Lever handle meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options include: 1.5 = 1.5 gpm (5.7 L/min) flow restrictor, 1.75 = 1.75 gpm (6.62 L/min) flow restrictor, L1 = Less showerhead, L4 = Less showerhead, arm, and flange, L7 = Less handle, STN = Satin Nickel finish, TC = Test Cap Trim.

Dimensions

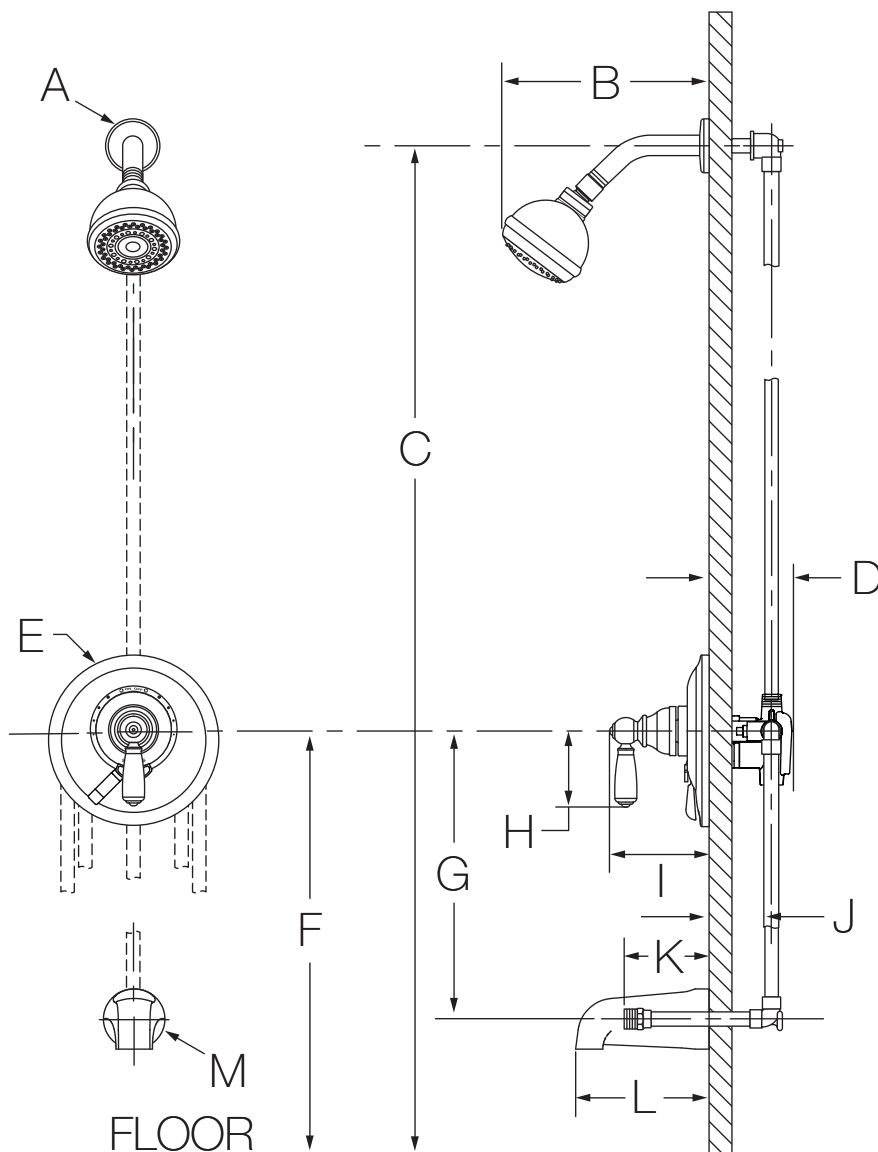

Measurements	
A	Ø 2-1/2", 64 mm
B	6-3/4", 172 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 7", 178 mm
F	Ref. 32", 813 mm
G	Ref. 12", 305 mm
H	3-1/8", 79 mm
I	4-1/8", 105 mm
J	Rough-In 2-3/8" ± 1/2", 60 mm ± 13 mm
K	Male 1/2-14 NPT fitting must protrude 4" (102 mm) from finished wall
L	5-1/4", 133 mm
M	Ø 2-1/2", 64 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see J as reference).
- 4) Dimensions subject to change without notice.