

## S9608PLR, S9608PLRTRM Shower/Hand Shower Trim Specification Submittal

Location:

### Feature Highlights

- Origins Shower/Hand Shower Trim.
- Requires Temptrol® Pressure-Balancing Shower Valve.
- Integral diverter control.
- Metal lever handle.
- ADA 36" grab bar for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- Single-mode hand shower wand with Non-Positive Shutoff (NPSO).
- Single-mode showerhead with easy to clean nozzles.
- Standard 2.0 gpm (7.6 L/min) flow rate.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

### Model Numbers

- ☐ **S9608PLR**  
Tub/Shower/Hand Shower Trim with integral volume control, Temp-  
trol Pressure Balancing Shower Valve ordered separately (use when  
ordering L1-L7 modifications, do not use hyphens or decimal points)

#### Valve Options

- S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
- S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

- ☐ **S9608PLRTRM**  
Tub/Shower/Hand Shower Trim with integral volume control, Temp-  
trol Pressure Balancing Shower Valve ordered separately (use when  
ordering L1-L7 and TC modifications, do not use hyphens or decimal  
points)


#### Valve Options

- S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
- S162 Series Temptrol VersaFlex Shower Valve requires TC modifier

#### Note:

- To create trim sku, follow the format:  
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If lower than  
standard) -> TRM -> TC (If applicable)
- To create valve & trim sku, follow the format:  
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (If  
lower than standard)
- For B and REV modifications, contact customer service for your sku

### Options/Modifications

- ☐ **15**  1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L2** Less hand shower (wand only)
- ☐ **L3** Less showerhead & hand shower wand
- ☐ **L4** Less head, arm and flange
- ☐ **L5** Less hand shower system (less bar, hose, wand, and elbow)
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim
- ☐ **CHKS** Integral check stop
- ☐ **STN** Satin Nickel finish
- ☐ **B** Brass escutcheon (chrome only)
- ☐ **X** Integral service stops - allows water shut-off at valve for service

### Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm & 2.0 gpm compliant
- Lever handle meets ADA requirements for operation
- BAA compliant for S9608PLR only



### Warranty

**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.




## Architectural/Engineering Specification

Symmons Origins \_\_\_\_\_ With Origins Shower/Hand Shower Trim, requires Temptrol® Pressure-Balancing Shower Valve, integral diverter control, metal lever handle, ADA 36" grab bar for hand shower wand, dual checks for backflow protection, 60" flexible metal hose, single-mode hand shower wand with NPSO, single-mode showerhead with easy to clean nozzles, and standard 2.0 gpm (7.6 L/min) flow rate. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5gpm (5.7 L/min) & 2.0gpm (7.6 L/min) compliant. Lever handle meets ADA requirements for operation. BAA compliant for S9608PLR only. Available options include: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead & hand shower wand, L4 = Less head, arm and flange, L5 = Less hand shower system (less bar, hose, wand, and elbow), L7 = Less handle, STN = Satin Nickel finish, B = Brass escutcheon (chrome only), X = Integral service stops, CHKS = Integral check stops, TC = Test Cap Trim.

S9608PLR, S9608PLRTRM

## Dimensions

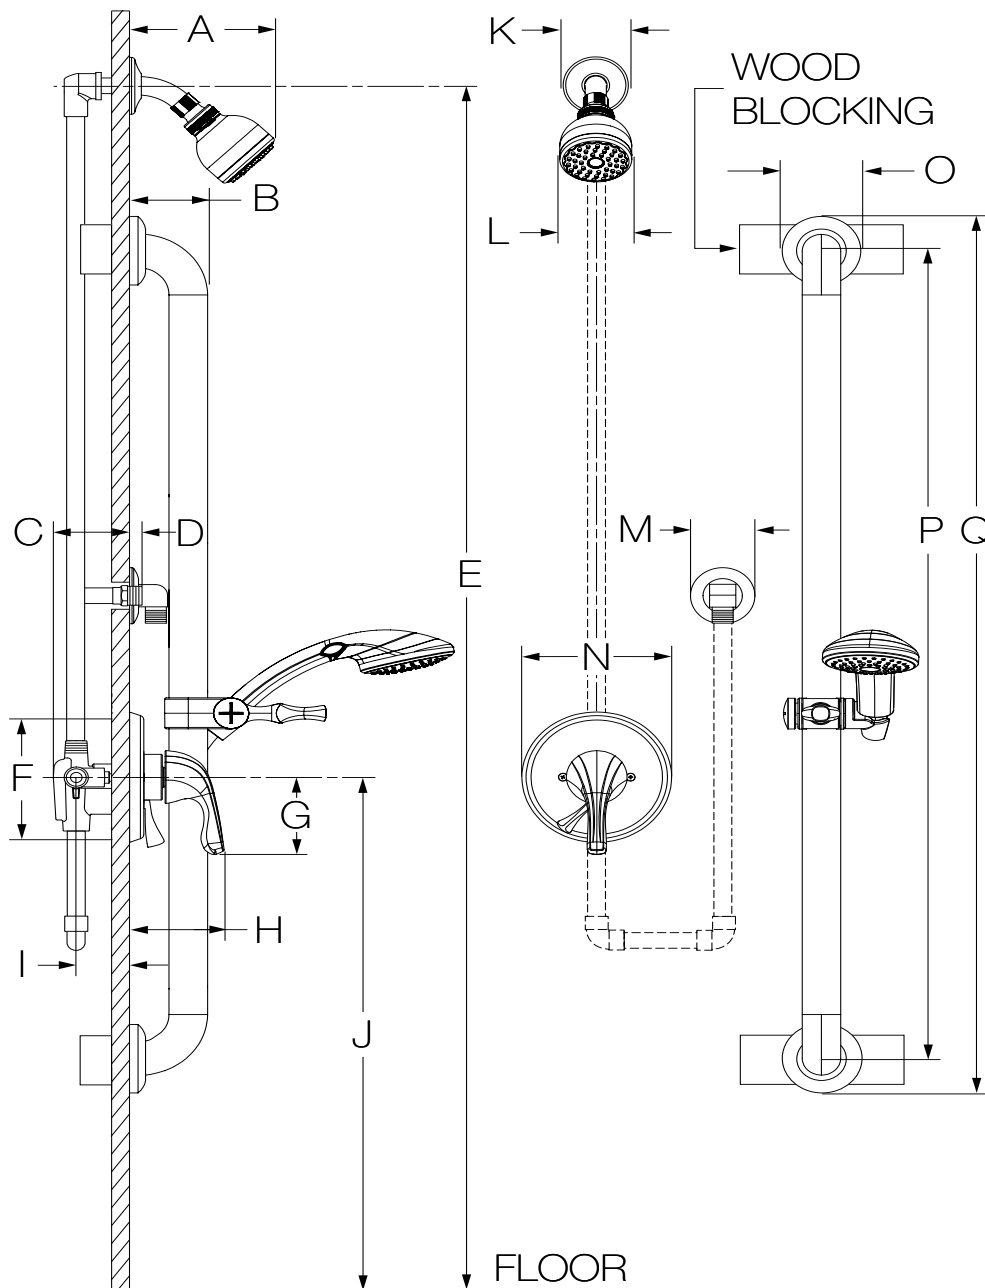

Measurements	
A	6-3/8", 162 mm
B	3", 76 mm
C	3-1/2", 89 mm
D	Male 1/2" NPT fitting must protrude 3/8" (10 mm) from finished wall
E	Ref. 77", 1956 mm
F	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
G	3-3/8", 86 mm
H	3-5/8", 92 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	Ref. 42", 1067 mm
K	Ø 2-1/2", 64 mm
L	Ø 2-3/4", 70 mm
M	Ø 2-1/2", 64 mm
N	Ø 5-3/4", 146 mm
O	Ø 3-1/8", 79 mm
P	36", 914 mm
Q	39", 991 mm

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.