

# Location:



4403-TRM, 4403TRMTC  
Hand Shower Trim  
**Specification Submittal**



Model Numbers	Feature Highlights
<input type="checkbox"/> <b>4403-TRM</b> Hand Shower Trim, Temptrol Pressure Balancing Shower Valve ordered separately  <input type="checkbox"/> <b>4403TRMTC</b> Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap	<ul style="list-style-type: none"> <li>• Carrington Hand Shower Trim</li> <li>• Requires Temptrol® Pressure Balancing Shower Valve</li> <li>• Metal lever handle</li> <li>• Cradle for hand shower wand</li> <li>• Dual checks for backflow protection</li> <li>• 60" flexible metal hose</li> <li>• 3 mode hand shower wand</li> <li>• 2.0 gpm (7.6 L/min) flow restrictor</li> <li>• Tub spout not included</li> <li>• Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>• Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4403TRMTC)</li> <li>• For optional in-line vacuum breaker order p/n EF-109</li> </ul>
Options/ Modifications	<b>Warranty</b>
<input type="checkbox"/> <b>1.5</b> <b>1.5 gpm (5.7 L/min) flow restrictor</b> <input type="checkbox"/> <b>STN</b> <b>Satin Nickel finish</b>	
<b>Note:</b> Append appropriate -suffix to model number.	<b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations. <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.
Compliance	
- ASME A112.18.1/CSA B125.1  	


## Architectural/ Engineering Specification

Symmons Carrington Hand Shower Trim \_\_\_\_\_ Includes Carrington Hand Shower Trim, Requires Temptrol® Pressure Balancing Shower Valve, Metal lever handle, Cradle for hand shower wand, Dual checks for backflow protection, 60" flexible metal hose, 3 mode hand shower wand, 2.0 gpm (7.6 L/min) flow restrictor, Tub spout not included, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 4403TRMTC), For optional in-line vacuum breaker order p/n EF-109. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin Nickel finish".



4403-TRM, 4403TRMTC

## Dimensions

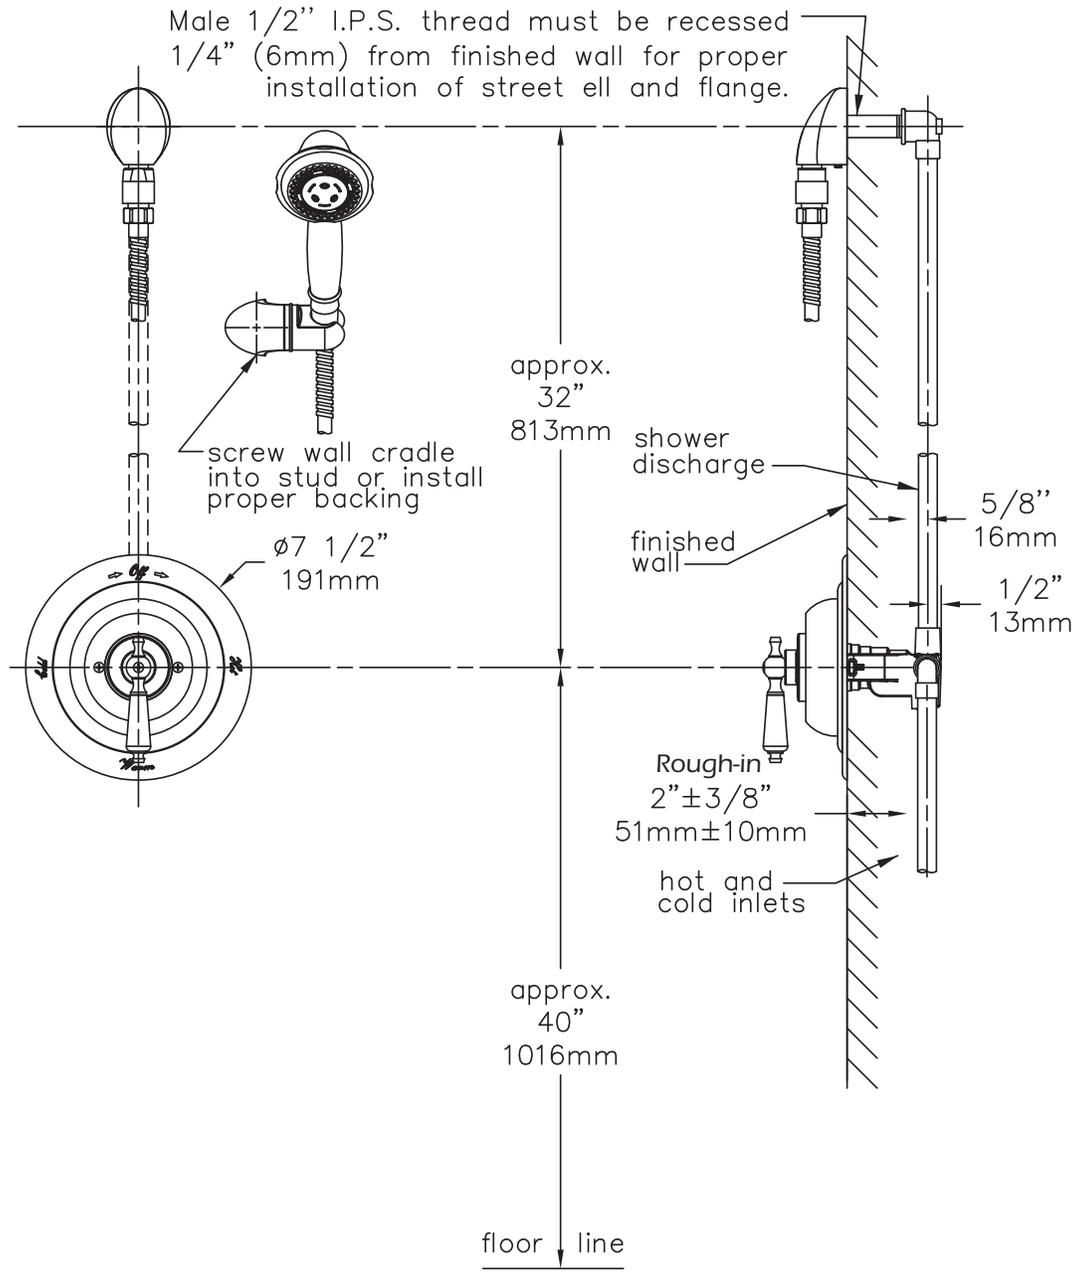

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.