



SYMMONS®

Location:

**Temptrol®
Commercial**

C-96-600-B30-V-X, C-96-600-B30-V-TRM & C96600B30TRMTC
Tub/Shower/Hand Shower System & Trim



Specification Submittal



Model Numbers

- | | |
|--|---|
| <input type="checkbox"/> C-96-600-B30-V-X | Tub/Shower/Hand Shower System with Temptrol Pressure Balancing Tub/Shower Valve and Symmons Triple Outlet Diverter Valve |
| <input type="checkbox"/> C-96-600-B30-V-TRM | Tub/Shower/Hand Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve and Symmons Triple Outlet Diverter valve ordered separately |
| <input type="checkbox"/> C96600B30TRMTC | Tub/Shower/Hand Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap |

Options/ Modifications

- | | |
|---|--|
| <input type="checkbox"/> 1.5 |  1.5 gpm (5.7 L/min) flow restrictor |
| <input type="checkbox"/> NS |  Non-shared diverter valve |
| <input type="checkbox"/> L/HD | Shower head not included
Includes showerhead arm and flange only |
| <input type="checkbox"/> Delete Suffix X | Less integral service stops |
| <input type="checkbox"/> 72 | 72" hose in place of 60" hose |
| <input type="checkbox"/> VP | Vandal resistant escutcheon screws in place of standard screws |
| <input type="checkbox"/> L1 | Less showerhead (head only) |
| <input type="checkbox"/> L2 | Less hand shower (wand only) |
| <input type="checkbox"/> L3 | Less showerhead & hand shower wand |
| <input type="checkbox"/> L5 | Less hand shower system (less bar/ cradle, hose, wand and elbow) |
| <input type="checkbox"/> L7 | Less handle |
| <input type="checkbox"/> Delete Suffix B30 | 2 wall hooks in place of 30" bar |

Note: Append appropriate -suffix to model number.

Feature Highlights

- Temptrol Commercial Tub/Shower/Hand Shower System or Trim
- Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with C-96-600-B30-V-X)
- Requires Symmons Triple Outlet Diverter Valve (included with C-96-600-B30-V-X)
- Integral service stops allow water shutoff at valve for service (included with C-96-600-B30-V-X)
- Adjustable stop screw to limit hand turn (included with C-96-600-B30-V-X)
- Metal lever handles
- Dual checks for backflow protection
- 30" slide bar for hand shower
- 60" flexible metal hose
- 5-1/4" non-diverter tub spout
- 1 mode showerhead
- 1 mode hand shower
- 2.0 gpm (7.6 L/min) flow restrictor
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n C96600B30TRMTC)

Compliance


- ASME A112.18.1/CSA B125.1



Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Architectural/ Engineering Specification

Symmons Temptrol and Commercial Tub and Shower and Hand Shower System or Trim _____ Includes Temptrol Commercial Tub/Shower/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with C-96-600-B30-V-X), Requires Symmons Triple Outlet Diverter Valve (included with C-96-600-B30-V-X), Integral service stops allow water shutoff at valve for service (included with C-96-600-B30-V-X), Adjustable stop screw to limit hand turn (included with C-96-600-B30-V-X), Metal lever handles, Dual checks for backflow protection, 30" slide bar for hand shower, 60" flexible metal hose, 5-1/4" non-diverter tub spout, 1 mode showerhead, 1 mode hand shower, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n C96600B30TRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant.


Available options: "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "NS - Non-shared diverter valve", "L/HD - Shower head not included, Includes showerhead arm and flange only", "Delete Suffix X - Less integral service stops", "72 - 72" hose in place of 60" hose", "VP - Vandal resistant escutcheon screws in place of standard screws", "L1 - Less showerhead (head only)", "L2 - Less hand shower (wand only)", "L3 - Less showerhead & hand shower wand", "L5 - Less hand shower system (less bar/ cradle, hose, wand and elbow)", "L7 - Less handle", "Delete Suffix B30 - 2 wall hooks in place of 30" bar".



SYMMONS® Temptrol® Commercial

C-96-600-B30-V-X, C-96-600-B30-V-TRM & C96600B30TRMTC

Dimensions

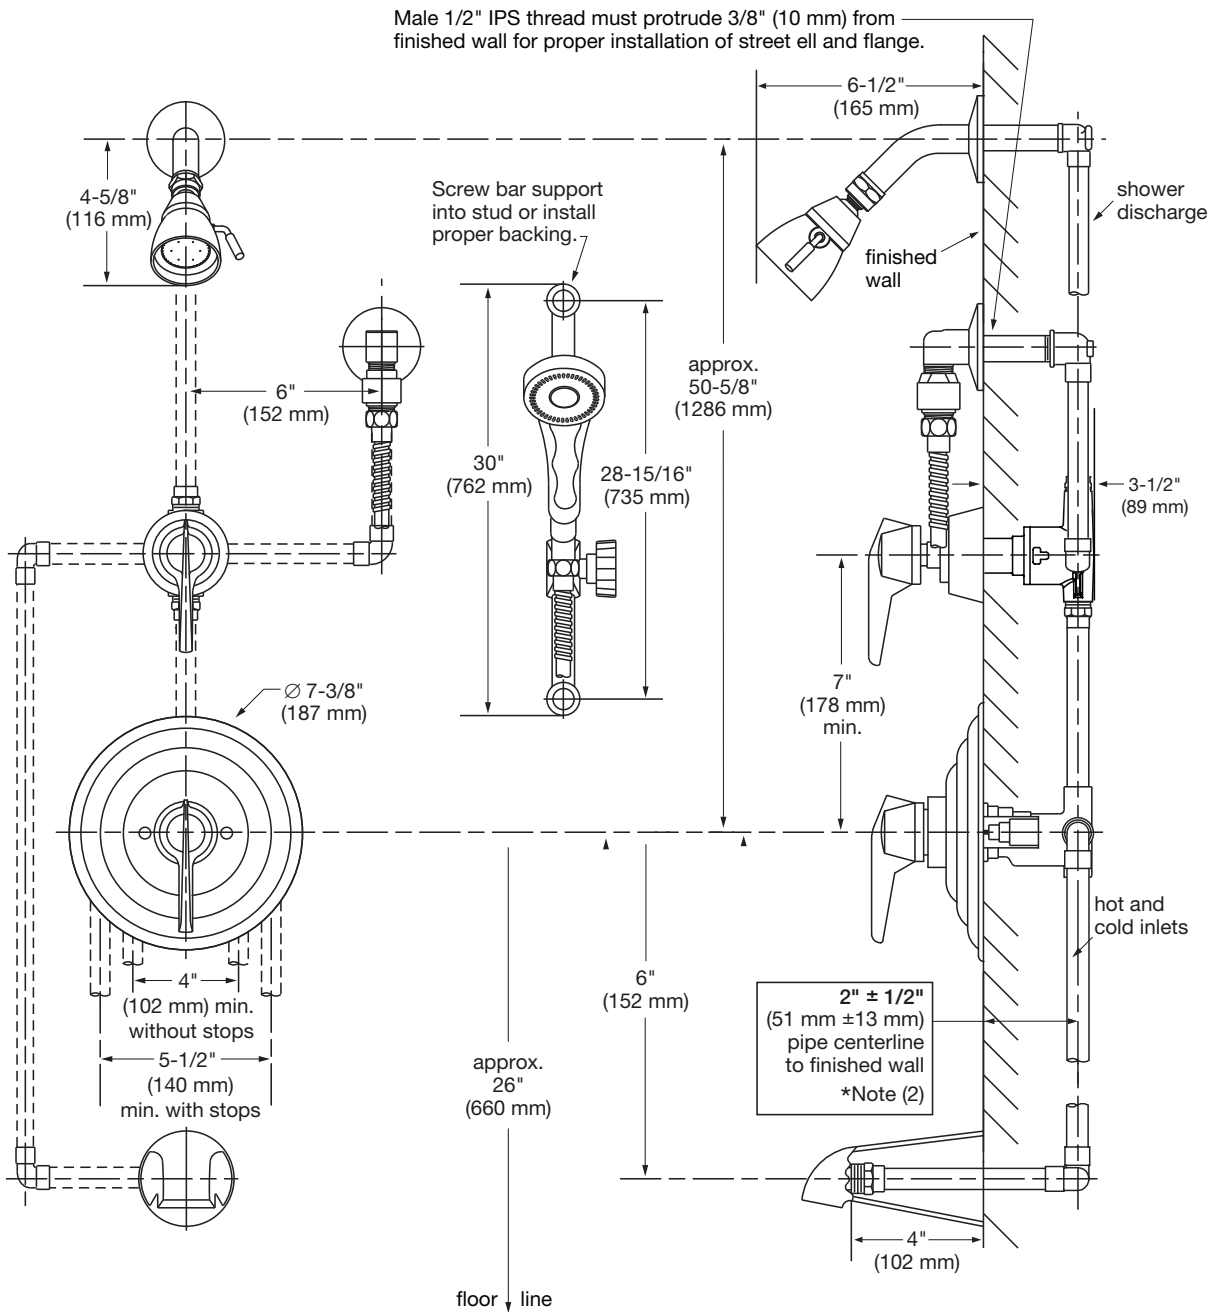

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.