





# 4995TRM Shower/Hand Shower Trim Specification Submittal

Location:

Model Numbers	Options/Modifications
<input type="checkbox"/> <b>4995TRM</b> Shower/Hand Shower Trim  <b>Valve Options:</b> -261 Series Temptrol® Shower Valve with TRM modifier -161 Series Temptrol Shower Valve requires TC modifier -2DIVBODYSRT	<input type="checkbox"/> <b>15</b>  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> <b>TC</b> Test Cap Trim (includes TA-10™ & T-12A) used with 161 Series Temptrol Shower Valve <input type="checkbox"/> <b>L1</b> Less showerhead <input type="checkbox"/> <b>L2</b> Less hand shower (wand only) <input type="checkbox"/> <b>L3</b> Less showerhead and hand shower (head and wand only) <input type="checkbox"/> <b>L4</b> Less showerhead, arm, and flange <input type="checkbox"/> <b>L5</b> Less hand shower system <input type="checkbox"/> <b>L7</b> Less handle <input type="checkbox"/> <b>MB</b> Matte Black finish <input type="checkbox"/> <b>STN</b> Satin Nickel finish
Feature Highlights	Warranty
<ul style="list-style-type: none"> <li>• Verity Shower/Hand Shower Trim.</li> <li>• Requires Temptrol Pressure-Balancing Shower Valve.</li> <li>• Separate two-function diverter.</li> <li>• 30" Slide bar.</li> <li>• In-line vacuum breaker.</li> <li>• 60" flexible metal hose.</li> <li>• Single-mode showerhead.</li> <li>• Single-mode HydroMersion® hand shower wand with Non-Positive Shutoff (NPSO).</li> <li>• Standard flow rate, 2.0 gpm (7.6 L/min).</li> <li>• Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.</li> </ul>	<b>Limited Lifetime</b> - for residential installations. <b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.
Compliance	
<ul style="list-style-type: none"> <li>• ASME® A112.18.1/CSA® B125.1</li> <li>• WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</li> <li>• Lever handle meets ADA requirements for operation</li> <li>• 1.5 gpm option meets CALGreen requirements</li> </ul>	  



## SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
4995	STN	L7	15	TRM		4995STNL115TRM
4995	MB			TRM	TC	4995MBTRMTC

**Notes:** No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

## Architectural/Engineering Specification

Symmons \_\_\_\_\_ Includes Verity Shower and Hand Shower Trim for Temptrol Pressure-Balancing Shower Valve. Features 30" slide bar, in-line vacuum breaker, 60" flexible metal hose, single-mode HydroMersion hand shower with NPSO, single-mode showerhead, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min) and 2.0 gpm (7.6 L/min) compliant. Lever handle and hand shower wand meets ADA requirements for operation. 1.5 gpm option meets CALGreen requirements. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L2 = Less hand shower (wand only), L3 = Less showerhead and hand shower (head and wand only), L4 = Less showerhead, arm, and flange, L5 = Less hand shower system, L7 = Less handle, MB = Matte Black finish, STN = Satin Nickel finish, TC = Test Cap Trim.

## Dimensions

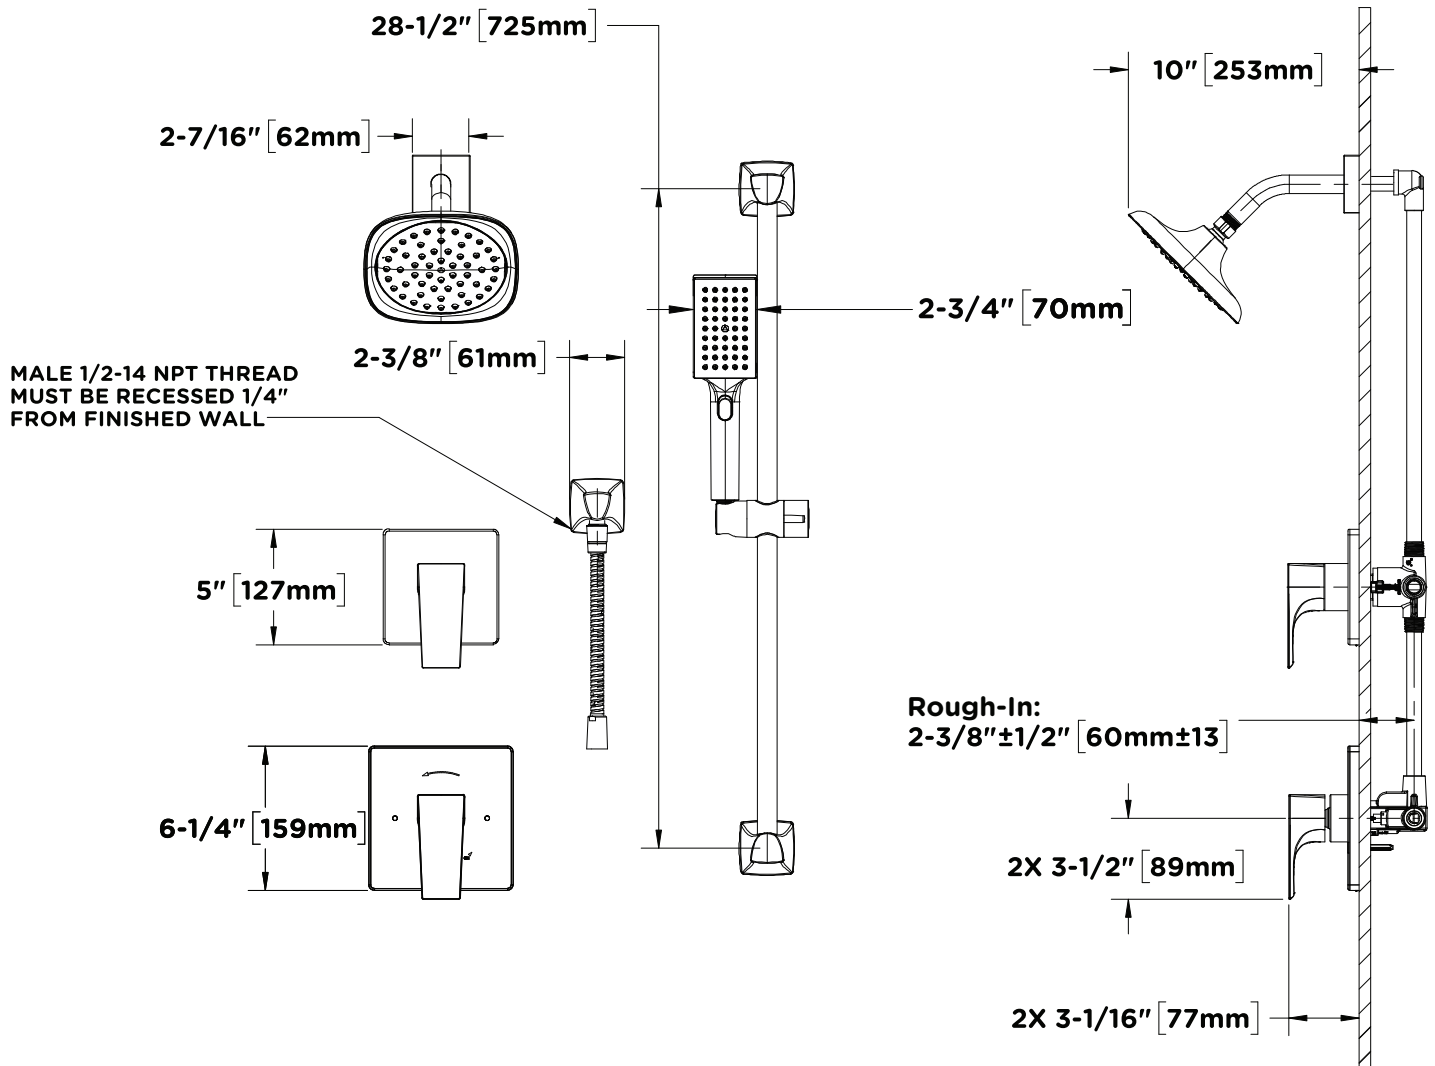

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls  $\frac{1}{2}"$  or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.