

## S6794TRM Tub/Hand Shower Trim Specification Submittal

Location:

### Model Numbers

- ☐ **S6794TRM**  
Tub/Hand Shower Trim

#### Valve Options:

- S262 Series Temptrol® VersaFlex™ Shower Valve with TRM modifier
- S162 Series Temptrol VersaFlex™ Shower Valve requires TC modifier

### Feature Highlights

- Identity Tub/Hand Shower Trim.
- Requires Temptrol VersaFlex Pressure-Balancing Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 5-1/8" slip-on tub spout.
- Cradle for hand shower wand.
- 60" flexible metal hose.
- Single-mode HydroMersion™ hand shower wand with Non-Positive Shutoff (NPSO).
- Dual checks for backflow protection.
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

### Compliance

- ASME® A112.18.1/CSA® B125.1.
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min).
- Lever handle and hand shower wand meets ADA requirements for operation.



### Options/Modifications

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L2** Less hand shower wand
- ☐ **L5** Less hand shower system (cradle, hose, wand, and elbow)
- ☐ **L6** Less tub spout
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim (includes TA-10™ & T-12A) *used with S162 Series Temptrol VersaFlex Shower Valve*
- ☐ **BBZ** Brushed Bronze finish
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish

### Warranty

**Limited Lifetime** - for residential installations.  
**10 Years** - for commercial/industrial installations.  
Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.



### SKU Builder


Series	Finish	Modifier	Flow Rate	TRM (required)	TC	Final SKU
S6794	STN		15	TRM		S6794STN15TRM
S6794	MB	L2		TRM	TC	S6794MBL2TRMTC

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

### Architectural/Engineering Specification

Symmons Identity Tub and Hand Shower Trim \_\_\_\_\_ Includes Identity Tub/Hand Shower Trim for Temptrol VersaFlex Pressure-Balancing Shower Valve. Features integral diverter control, metal level handle, 5-1/8" slip-on tub spout, cradle for hand shower wand, 60" flexible metal hose, dual checks for backflow protection, single-mode HydroMersion hand shower with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictors. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) compliant. Lever handle and hand shower wand meets ADA requirements. Available options include: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L2 = Less hand shower wand, L5 = Less hand shower system, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

## Dimensions

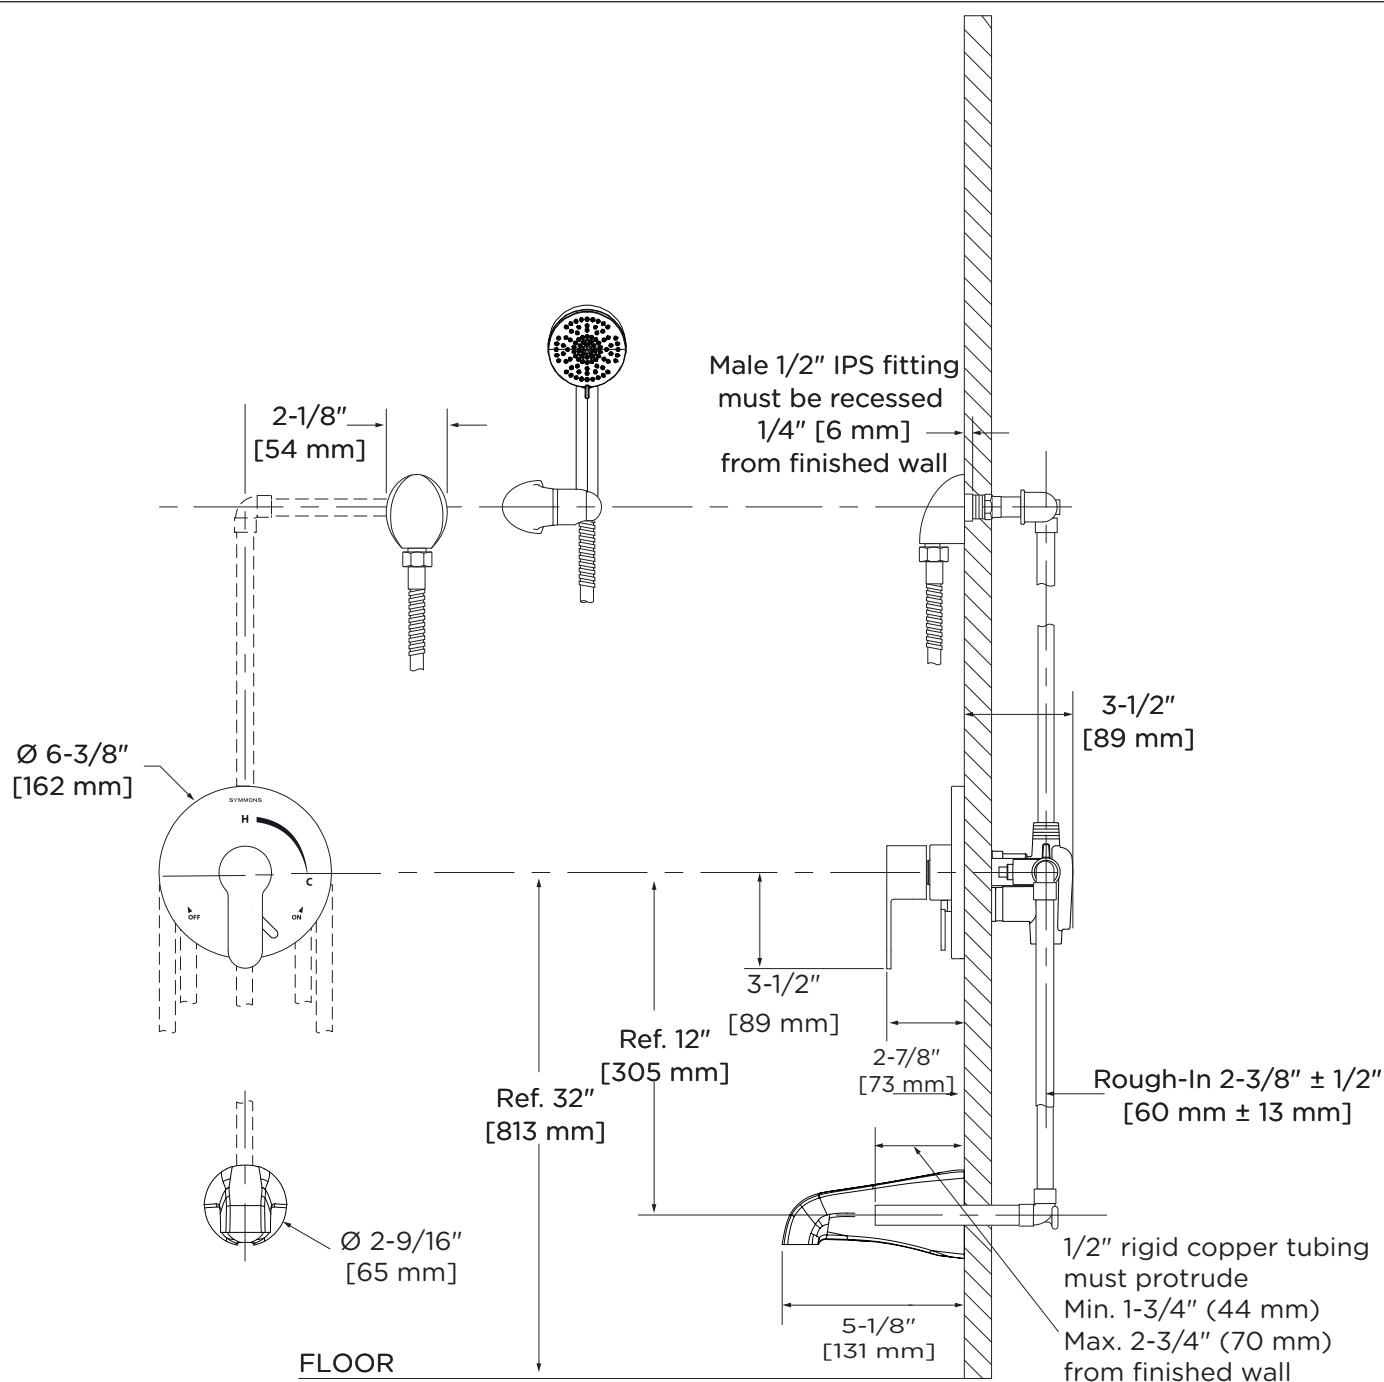

### Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions subject to change without notice.