

481HSBQ
Hand Shower System
Specification Submittal

Location:

Model Numbers

- ☐ **481HSBQ** Hand Shower System

Feature Highlights

- Oak Hand Shower System with Slide Bar.
- 28" slide bar for hand shower wand.
- Dual checks for backflow protection.
- 60" flexible metal hose.
- Single-mode HydroMersion™ hand shower wand with non-positive shutoff (NPSO).
- Standard flow rate, 2.0 gpm (7.6 L/min).
- Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish.

Compliance

- ASME® A112.18.1/CSA® B125.1.
- WaterSense® 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min).
- Hand Shower meets ADA requirements for operation.




Options/Modifications

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish
- ☐ **L2** Less hand shower wand

Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



SKU Builder


Series	Finish	Modifier	Flow Rate	Final SKU
481HSBQ	STN		15	481HSBQSTN15
481HSBQ	MB	L2		481HSBQMBL2

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Oak Hand Shower System _____ Features 28" slide bar for hand shower wand, dual checks for back-flow protection 60" flexible metal hose, single-mode HydroMersion hand shower wand, and standard 2.0 gpm (7.6 L/min) flow rate. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), and 2.0 gpm (7.6 L/min) compliant. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L2 = Less hand shower wand, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

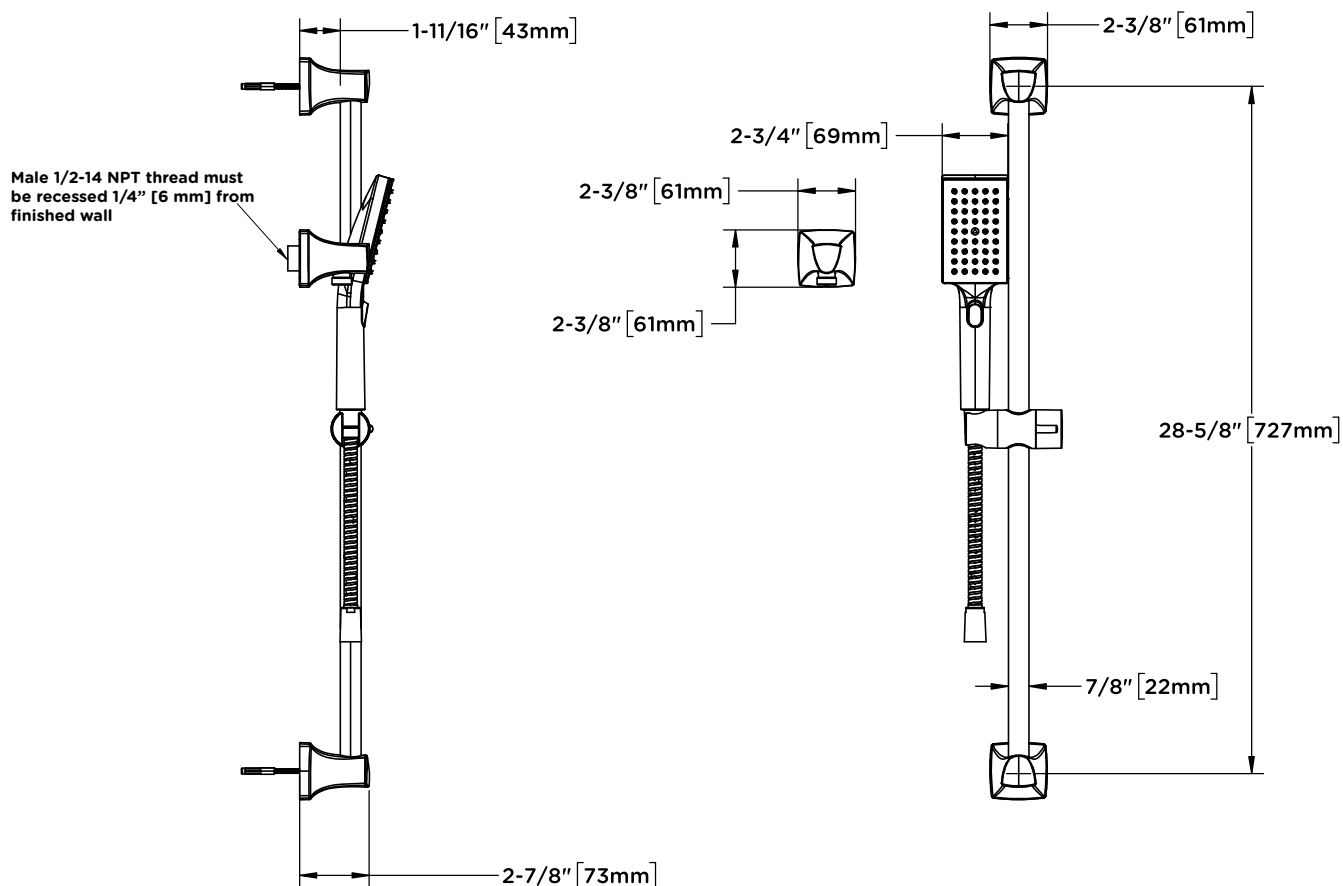

Notes:

- 1) All dimensions measured from nominal rough-in.
- 2) Dimensions subject to change without notice.