

S5992TRM
Tub/Shower System
Specification Submittal

Location:

Model Numbers

- ☐ **S5992TRM**
Tub/Shower System Trim
- Valve Options:**
-S262 series Temptrol® shower valve with TRM modifier
-S162 series Temptrol shower valve requires TC modifier

Compliance

- ASME A112.18.1/CSA B125.1.
- WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min).
- Lever handle meets ADA requirements for operation.



Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Feature Highlights

- Birch® Tub/Shower Trim.
- Requires Temptrol Pressure Balancing Tub/Shower Valve.
- Integral diverter control.
- Metal lever handle.
- 7" non-diverter tub spout.
- Single-mode HydroMersion showerhead.
- 2.0 gpm (9.5 L/min) flow restrictor.
- Components made from metal and nonmetal materials, plated in standard Polished Chrome finish.

Modifications

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **L1** Less showerhead
- ☐ **L4** Less head, arm and flange
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim (includes TA-10&T-12A) *used with 16 Series Temptrol Valve*
- ☐ **STN** Satin Nickel finish

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	Final SKU
S5992	STN	L1		TRM	TC	S5992STNL1TRMTC
S5992	STN			TRM		S5992STNTRM

Note: No more than two modifiers (L1-L7) and modifier order will follow numerical order.

Architectural/Engineering Specification

Symmons Birch® Tub and Shower System _____ Includes Birch® Tub/Shower Trim, for Temptrol Pressure Balancing Tub/Shower Valve, integral diverter control, metal lever handle, 7" non-diverter tub spout, single-mode HydroMersion showerhead, 2.0 gpm (9.5 L/min) flow restrictor, components made from metal and nonmetal materials, plated in standard Polished Chrome finish, 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.5/2.0 complaint. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, L1 = Less showerhead, L4 = Less head, arm and flange, L7 = Less handle, TC = Test Cap, and STN = Satin Nickel finish.

Dimensions

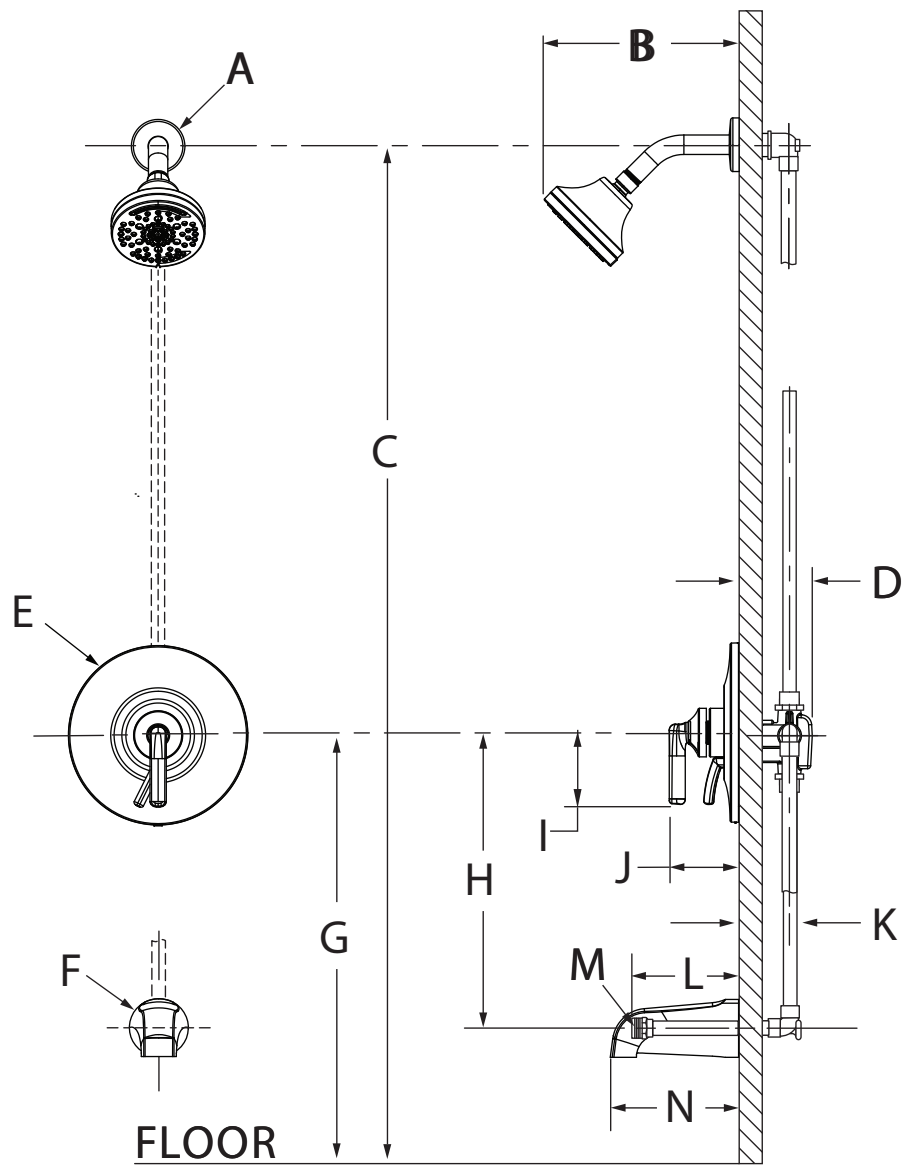

Measurements	
A	Ø 2-1/4", 57 mm
B	8-3/16", 208 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Ø 7-1/2", 191 mm
F	Ø 2-1/2", 64 mm
G	Ref. 32", 813 mm
H	Ref. 12", 305 mm
I	3", 76 mm
J	2-7/8", 74 mm
K	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
L	4", 102 mm
M	Male 1/2-14 NPT fitting must protrude 4" (102mm) from finished wall
N	5-1/2", 139 mm

Notes:

- 1) All dimensions measured from nominal rough-in (see K as reference).
- 2) Dimensions are subject to change without notice.