



SYMMONS® Dia®



3592BTRM

Location:

Tub/Shower Trim

Specification Submittal

Model Numbers

- ☐ **3592BTRM**
Tub/Shower System Trim

Valve Options:

- 262 Series Temptrol® Shower Valve with TRM modifier.
- 162 Series Temptrol Shower Valve requires TC modifier.

Compliance

- ASME® A112.18.1/CSA® B125.1
- WaterSense® 1.5 gpm (5.7 L/min) 1.75 gpm (6.6 L/min) 2.0 gpm (7.6 L/min)
- Lever handle meets ADA requirements for operation



Warranty

Limited Lifetime - for residential installations.
10 Years - for commercial/industrial installations.
Refer to www.symmons.com/warranty for complete warranty information.



Feature Highlights

- Dia Tub/Shower trim
- Requires the Temptrol® Pressure-Balancing Shower Valve.
- Diverter tub spout.
- 7-mode HydroMersion™ showerhead with Non-Positive Shutoff (NPSO).
- Standard 2.0 gpm (7.6 L/min) flow restrictor.
- Components made from metal and nonmetal materials plated in standard Polished Chrome finish.

Modifications

- ☐ **15** 1.5 gpm (5.7 L/min) flow restrictor
- ☐ **175** 1.75 gpm (6.6 L/min) flow restrictor
- ☐ **Delete Suffix B** Chrome plastic escutcheon on valve with color graphics/indicators in place of standard brass escutcheon
- ☐ **L1** Less showerhead
- ☐ **L4** Less head, arm, and flange
- ☐ **L7** Less handle
- ☐ **TC** Test Cap Trim (includes TA-10™ & T-12A) *used with 162 Series Temptrol Valve*
- ☐ **BBZ** Brushed Bronze finish
- ☐ **MB** Matte Black finish
- ☐ **STN** Satin Nickel finish
- ☐ **1L** 1-Inch Spindle Extension

SKU Builder


Series	Finish	Modifier	Flow Rate	Trim (required)	Test Cap	1L	Final SKU
3592B	MB	L1	15	TRM	TC		3592BMBL115TRMTC
3592	BBZ	L7		TRM		1L	3592BBZL7TRM1L

Notes: No more than two modifiers (L1-L7) permitted when ordering. Modifiers will list in numerical order.

Architectural/Engineering Specification

Symmons Dia Tub and Shower System _____ Includes Dia Tub/Shower Trim for the Temptrol® Pressure-Balancing Shower Valve. Features diverter tub spout, 7-mode HydroMersion showerhead with NPSO, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetal materials plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 and WaterSense 1.5/1.75/2.0 compliant. Lever handle meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, 175 = 1.75 gpm (6.6 L/min) flow restrictor, Delete Suffix B = Chrome plastic escutcheon, L1 = Less showerhead, L4 = Less head, arm, and flange, L7 = Less handle, TC = Test Cap Trim, BBZ = Brushed Bronze finish, MB = Matte Black finish, STN = Satin Nickel finish, and 1L = 1-Inch spindle extension.

Dimensions

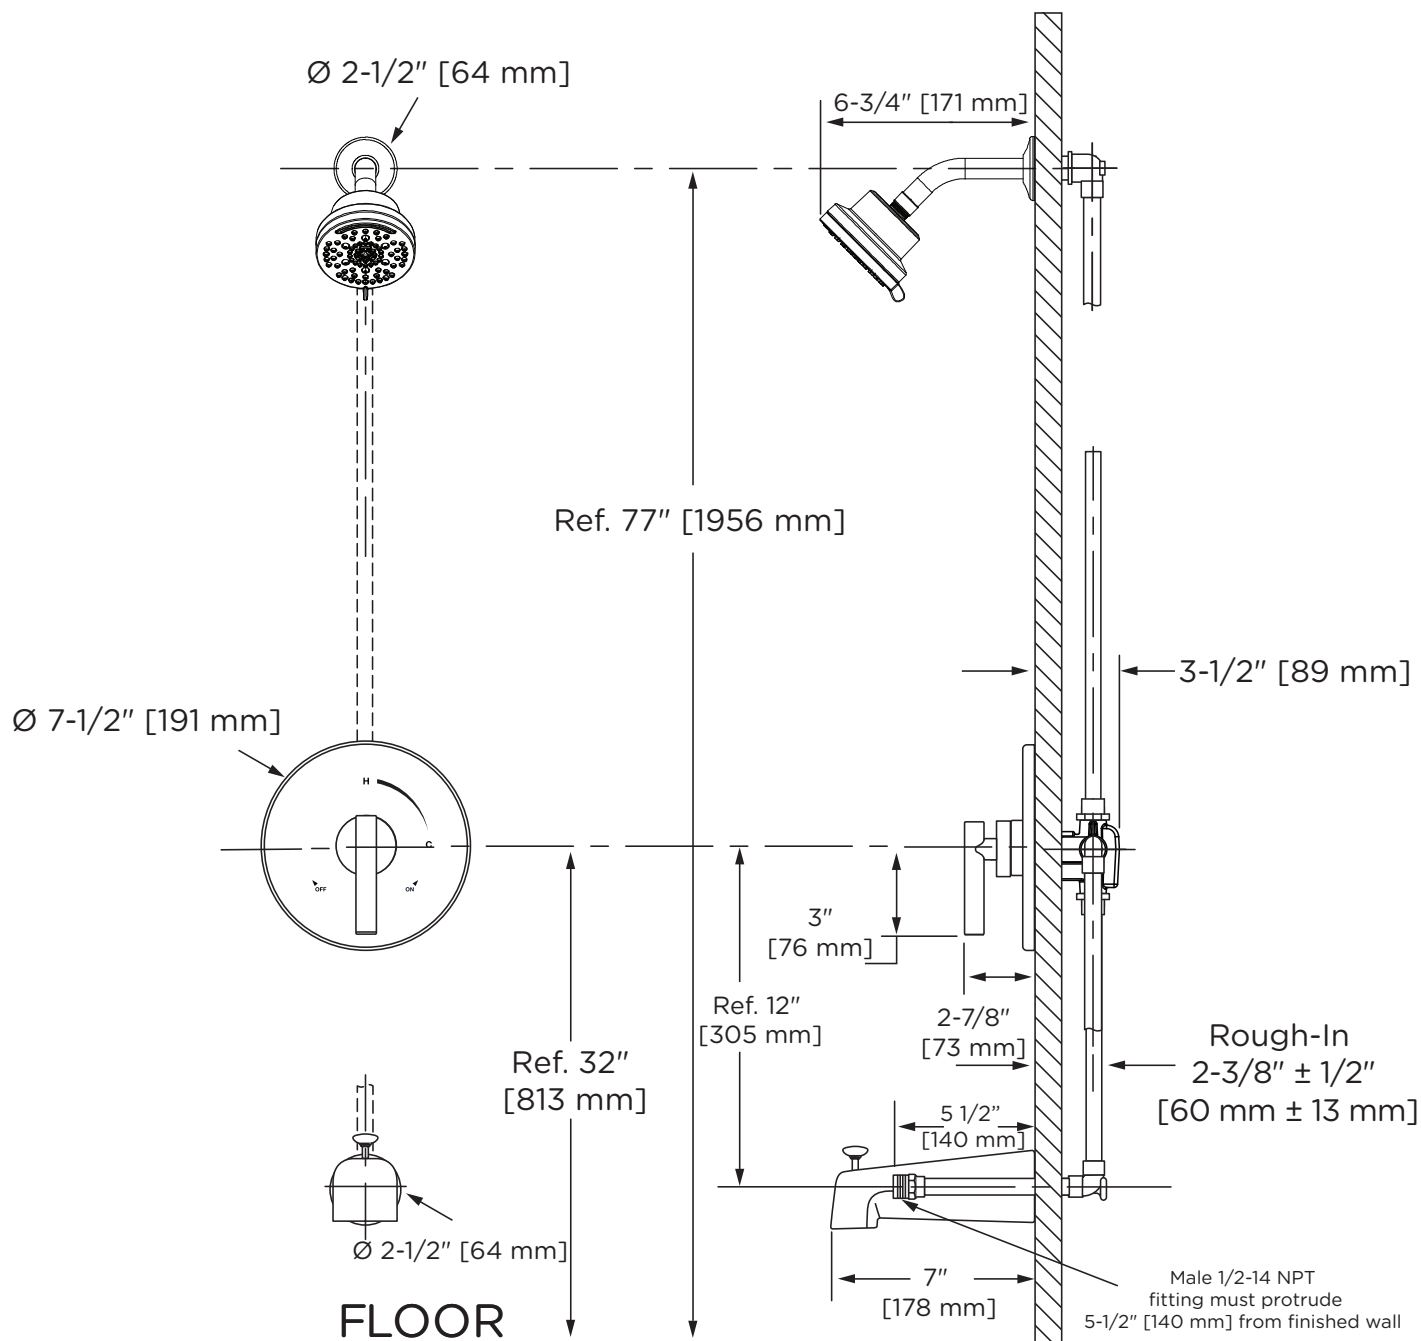

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) from drywall, plaster, or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in.
- 4) Dimensions are subject to change without notice.