


Location:



H931 Surface Mounted Shower System Specification Submittal

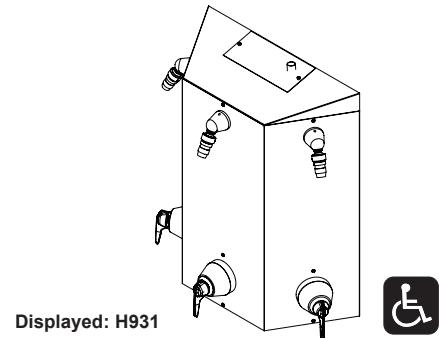

Displayed: H931

Model Numbers

H931 Through wall piping configuration

Feature Highlights

- Three pressure balancing mixing valves with screw driver service stops and adjustable stop screw to limit handle turn
- Shower heads are Fre-Flo
- All brass with ball joint
- Stainless steel covering to be 18 gauge with #4 brush finish
- 2.0 gpm (7.6 L/min) standard flow rate

Warranty

Limited Lifetime - to the original end purchaser in consumer/residential installations.

10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.



Compliance


- ASME A112.18.1/CSA B125.1
- ASSE 1016



Architectural/ Engineering Specification

Symmons 1 Mode Hand Shower Unit _____ Includes Three pressure balancing mixing valves with screw driver service stops and adjustable stop screw to limit handle turn, Shower heads are Fre-Flo, All brass with ball joint, Stainless steel covering to be 18 gauge with #4 brush finish, 2.0 gpm (7.6 L/min) standard flow rate. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, ASSE 1016 compliant.

Dimensions

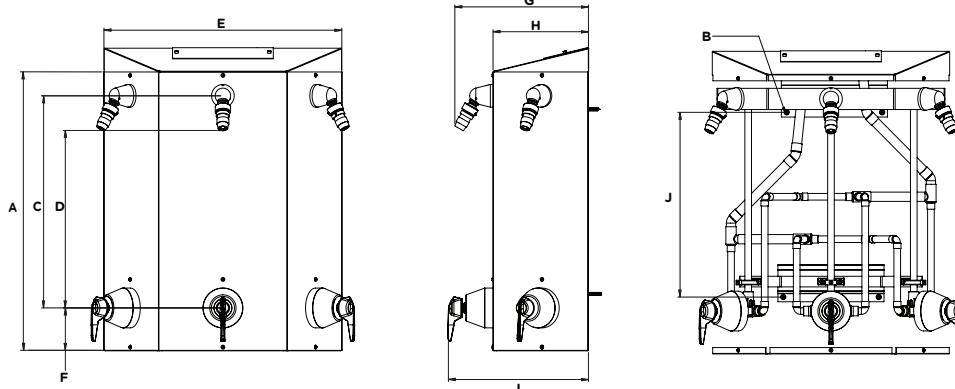

Measurements	
A	26-1/4", 667 mm
B	1/4"[8mm] DIAMETER 11/4"[32mm] DEEP
C	20", 508 mm
D	16-3/4", 425 mm
E	22-7/16", 570 mm
F	4", 102 mm
G	12-5/8", 320 mm
H	9", 229 mm
I	13-1/4", 335 mm
J	17-7/16", 442 mm