






Location:



S-6606  
Tub/Shower/Hand Shower System  
**Specification Submittal**




Model Numbers	Specification
<input type="checkbox"/> <b>S-6606</b> Unity Tub/Shower/Hand Shower System	<p>Tub/shower/hand shower system powered by the Temptrol® Pressure Balancing valve. Features adjustable stop screw to limit handle turn, integrated volume control, wall cradle, separate two function diverter, non-diverter tub spout, in-line vacuum breaker, 60” flexible metal hose, hand shower, 1 mode showerhead with easy to clean rubber nozzles and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish.</p> 
Modifications	
<input type="checkbox"/> <b>-1.5</b>  1.5 gpm (5.7 L/min) flow restrictor	
<input type="checkbox"/> <b>-STN</b> Satin Nickel finish	
<b>Note:</b> Append appropriate -suffix to model number.	
Compliance	Warranty
<p>-ASME A112.18.1/CSA B125.1</p> <p>-WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</p> <div></div>	<p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 

## Architectural/ Engineering Specification

Symmons \_\_\_\_\_ With Tub/shower/hand shower system powered by the Temptrol® Pressure Balancing valve. Features adjustable stop screw to limit handle turn, integrated volume control, wall cradle, separate two function diverter, non-diverter tub spout, in-line vacuum breaker, 60" flexible metal hose, hand shower, 1 mode showerhead with easy to clean rubber nozzles and standard 2.0 gpm (7.6 L/min) flow restrictor. Components made from metal and nonmetallic materials plated in standard polished chrome finish. 10 Year commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min) Complaint. Available options include "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "STN - Satin nickel finish".

S-6606

## Dimensions

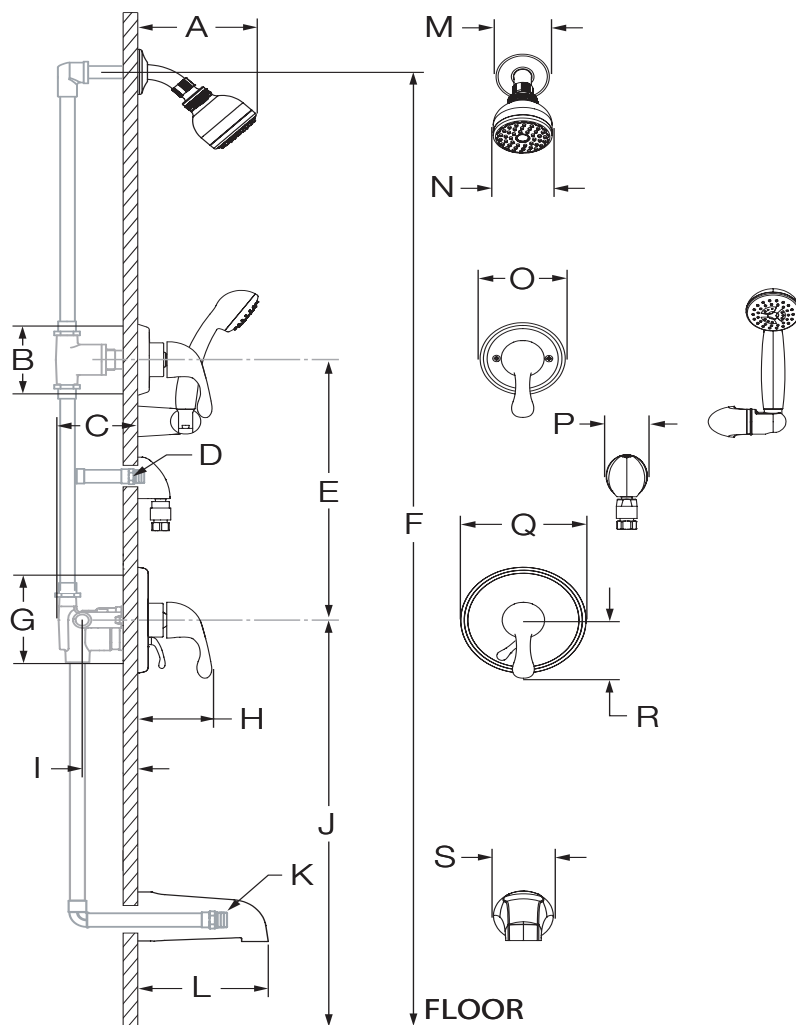

Measurements	
<b>A</b>	6 3/8", 162 mm
<b>B</b>	Diverter Valve Hole Size Min. Ø 3", 76 mm Max. Ø 3 1/4", 83 mm
<b>C</b>	3 1/2", 89 mm
<b>D</b>	Male 1/2" NPT fitting must be recessed 1/4" from finished wall
<b>E</b>	Ref. 10", 254 mm
<b>F</b>	Ref. 77", 1956 mm
<b>G</b>	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
<b>H</b>	3 3/4", 95 mm
<b>I</b>	Rough-in 2 3/8" ± 1/2", 60 mm ± 13 mm
<b>J</b>	Ref. 32", 813 mm
<b>K</b>	Male 1/2" NPT fitting must protrude 4" from finished wall
<b>L</b>	5 1/2", 140 mm
<b>M</b>	Ø 2 1/2", 64 mm
<b>N</b>	Ø 2 3/4", 70 mm
<b>O</b>	Ø 4 1/4", 108 mm
<b>P</b>	2 1/8", 54 mm
<b>Q</b>	Ø 6 3/8", 162 mm
<b>R</b>	3 1/2", 89 mm
<b>S</b>	Ø 2 1/2", 64 mm

### Notes:

- 1) All dimensions measured from nominal rough-in (see I as reference).
- 2) Dimensions subject to change without notice.

# Emplacement:



S-6606

Système de baignoire/douche/douche à main


## Présentation des spécifications



Numéro de modèle	Spécification
<input type="checkbox"/> <b>S-6606</b> Système de baignoire/douche/douche à main Unity	<p>Le système de baignoire/douche/douche à main comprend la vanne à pression autorégularisée Temptrol®. Figurer la vis d'arrêt réglable pour limiter le tournage de la poignée, contrôle du volume entier, un support de douche à main, un organe de dérivation deux fonction, un bec de baignoire non-déviateur, un reniflard de ligne, 60 po un tuyau flexible en métal, 1 douche à main et 1 pomme de douche avec facile à nettoyer les buses en caoutchouc et réducteur de débit régulier de 2,0 gpm (7,6 L/min). Les composants sont faits de matériaux métalliques et non métalliques au fini chrome poli standard.</p> 
<b>Modifications</b>	
<input type="checkbox"/> <b>-1.5</b>  Régulateur de débit de 1,5 gpm (5,7 L/min) <input type="checkbox"/> <b>-STN</b> Fini nickel satiné  <b>Remarque:</b> Juxtaposer le -suffixe approprié au numéro de modèle.	
Conforme	Garantie
<p>-ASME A112.18.1/CSA B125.1 -WaterSense 1.5 gpm (5.7 L/min) 2.0 gpm (7.6 L/min)</p>  	<p><b>Garantie limitée</b> - à l'acheteur original dans les installations du consommateur/résidentiel. <b>10 Ans</b> - pour les installations commerciales/industriel. Se reporter au <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> pour l'information complète concernant la garantie.</p> 

S-6606

## Dimensions

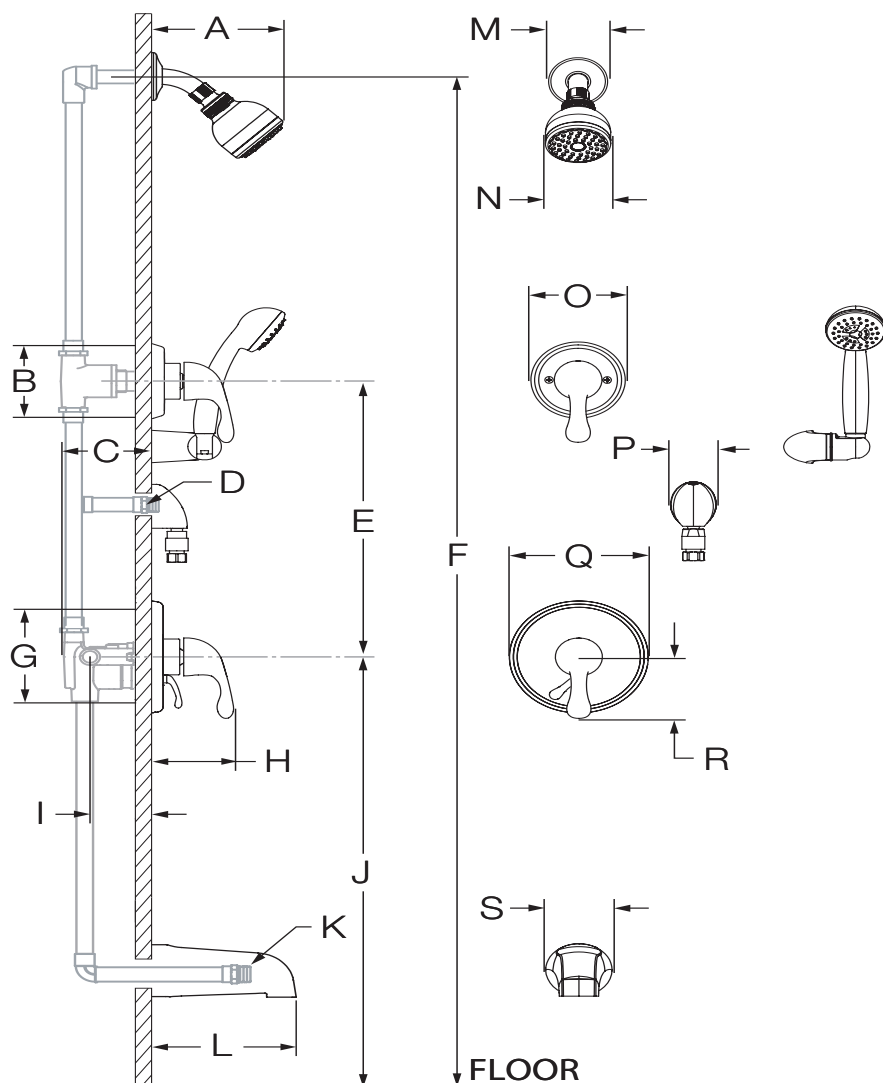

Mesures	
<b>A</b>	6 3/8 po, 162 mm
<b>B</b>	Taille du trou Min. Ø 3 po, 76 mm Max. Ø 3 1/4 po, 83 mm
<b>C</b>	3 1/2 po, 89 mm
<b>D</b>	1/2 po mâle à filets NPT doit faire encastré de 1/4 po du mur fini
<b>E</b>	Réf. 10 po, 254 mm
<b>F</b>	Réf. 77 po, 1956 mm
<b>G</b>	Taille du trou Min. Ø 3 po, 76 mm Max. Ø 4 po, 102 mm
<b>H</b>	3 3/4 po, 95 mm
<b>I</b>	Robinetterie brute 2 3/8 po ± 1/2 po, 60 mm ± 13 mm
<b>J</b>	Réf. 32 po, 813 mm
<b>K</b>	1/2 po mâle à filets NPT doit faire saillie de 4 po du mur fini
<b>L</b>	5 1/2 po, 140 mm
<b>M</b>	Ø 2 1/2 po, 64 mm
<b>N</b>	Ø 2 3/4 po, 70 mm
<b>O</b>	Ø 4 1/4 po, 108 mm
<b>P</b>	2 1/8 po, 54 mm
<b>Q</b>	Ø 6 3/8 po, 162 mm
<b>R</b>	3 1/2 po, 89 mm
<b>S</b>	Ø 2 1/2 po, 64 mm

### Remarques:

- 1) Toutes les dimensions sont mesurées à partir de la robinetterie brute nominale (voir I en référence).
- 2) Les dimensions sont sujettes à changer sans préavis.