


Hand Spray Adjusting Bar

(30" and 48" or cut to length desired)

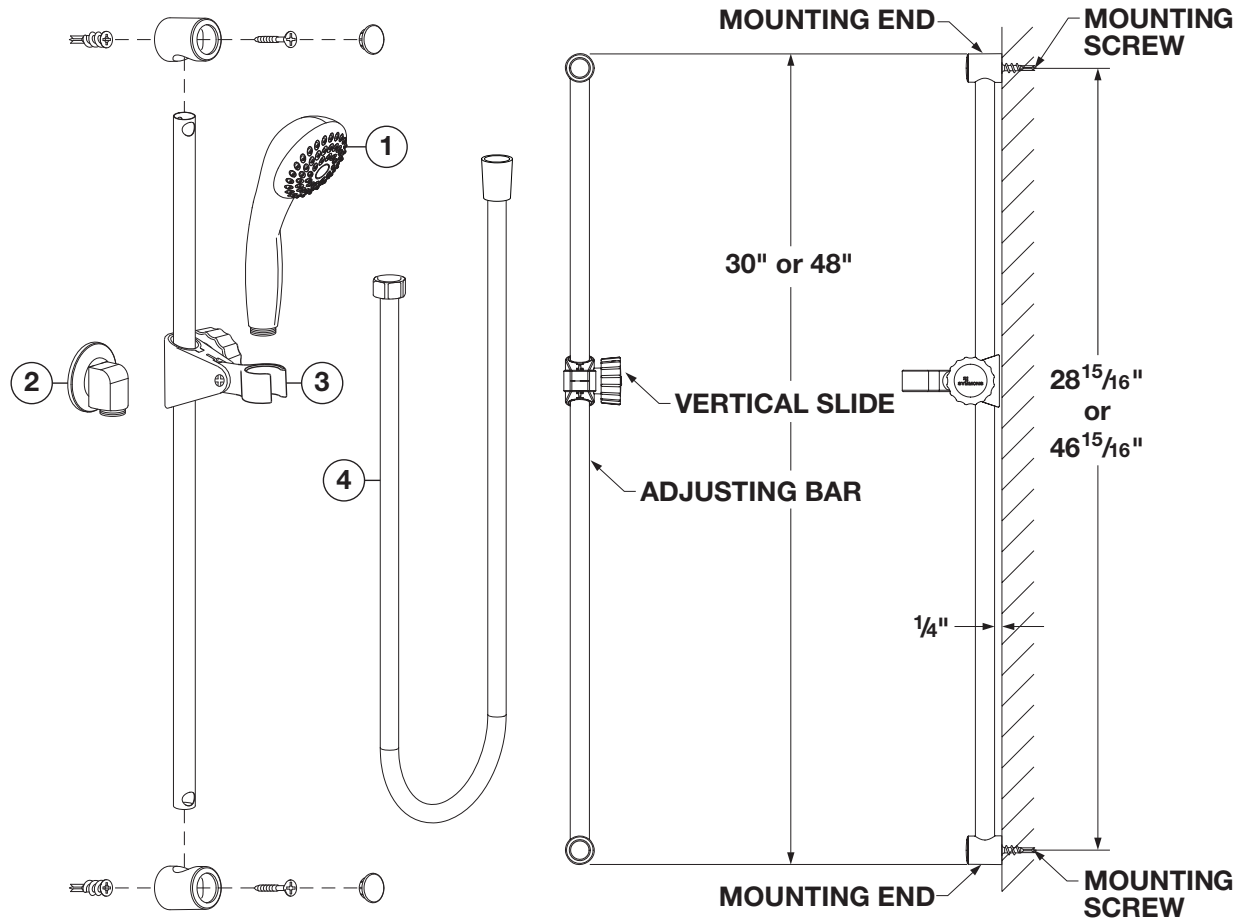

REPLACEMENT PARTS

ITEM	DESCRIPTION	PART NUMBER
1	Wand (chrome) Wand (STN)	FP-1 EF-100-STN
2	Wall Elbow	40A
3	Slide Mechanism	FP-SM3
4	60" Hose	EF-104

Note: Append finish code to part number for premium finish (wand becomes EF-100-STN).

The Symmons hand spray adjusting bar is designed for easy installation and a neat, clean appearance.

No exposed screws, vertical slide with large acrylic knob, polished chrome plated brass tube, mounting ends.

Mounts 1/4" from finish wall so it cannot be used as a grab bar. Grab bars should be in all shower or tub shower applications where so required.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
Phone: (800) 796-6667 ■ Fax (800) 961-9621
Website: symmons.com ■ Email: get help @symmons.com

Installation: (When job cutting, use tubing cutter and cut excess from end with holes).

1. Screw top mounting end to wall at proper position.
2. With vertical slide on bar as shown, assemble bottom mounting end to end of bar that has large and small hole. Large hole in bar should face forward and line up with hole in face of mounting end. Push bar onto top mounting end.
3. Plumb bar and screw bottom mounting end to wall.
4. To convert the hand spray adjusting bar to a friction up and down slide action (i.e. no requirement to use the bar slide knob), unscrew slide knob and replace with the enclosed hex socket head set screw. Tighten set screw so that slide can be moved up and down with minimal (less than 5 lbs.) force.

⚠ WARNING:

This product can expose you to chemicals including lead, which is known to the state of California to cause cancer, birth defects, or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.