




SYMMONS® HYDAPIPE®

Location:


H902S, H904S

Surface Mounted Shower System

Specification Submittal





Displayed: H902S



Displayed: H904S




Model Numbers		Feature Highlights
<input type="checkbox"/> H902S	Through wall piping configuration with soap dish	<ul style="list-style-type: none"> Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn Shower head Fre-Flo, all brass with ball joint Attached soap dish and sloped metal top cap Stainless steel covering to be 18 gauge with #4 brush finish 2.0 gpm (7.6 L/min) standard flow rate
<input type="checkbox"/> H904S	Through ceiling piping configuration with soap dish and custom extension shield	
Options/ Modifications		Compliance
<input type="checkbox"/> S	Remove Modifier for Less Soap Dish	<ul style="list-style-type: none"> - ASME A112.18.1/CSA B125.1 - ASSE 1016 
<input type="checkbox"/> RS	Recessed soap dish	
<input type="checkbox"/> 21	Manual shut-off - Cross handle single supply	Warranty Limited Lifetime - to the original end purchaser in consumer/residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 
<input type="checkbox"/> 22	Manual shut-off - lever handle single supply	
<input type="checkbox"/> 60	Metering Shut-off single supply	
<input type="checkbox"/> 56	Pressure balancing + metering dual supply	
<input type="checkbox"/> WD	Winter drain relief valve on supply (only available with single supply modifiers)	
<input type="checkbox"/> REV	Valve with reverse seat - for back to back installation	
<input type="checkbox"/> L1	Less shower head	
<input type="checkbox"/> L2	Less hand shower (wand only)	
<input type="checkbox"/> L3	Less showerhead and hand shower (head and wand only)	
<input type="checkbox"/> L5	Less hand shower system (Less bar/cradle, hose and wand)	
<input type="checkbox"/> 15	1.5 gpm (5.7 L/min) flow restrictor	
<input type="checkbox"/> C	Caked on soap dish	
Note: Append appropriate -suffix to model number.		

Architectural/ Engineering Specification

Symmons Surface Mounted Shower System _____ Includes Pressure Balancing mixing valve with screw driver service stops and adjustable stop screw to limit handle turn. Shower head Fre-Flo, all brass with ball joint. Attached soap dish and sloped metal top cap. Stainless steel covering to be 18 gauge with #4 brush finish, 2.0 gpm (7.6 L/min) standard flow rate. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, ASSE 1016 compliant. Available options: "S - Remove Modifier for Less Soap Dish", "RS - Recessed soap dish", "21 - Manual shut-off - Cross handle single supply", "22 - Manual shut-off - lever handle single supply", "60 - Metering Shut-off single supply", "56 - Pressure balancing + metering dual supply", "WD - Winter drain relief valve on supply (only available with single supply modifiers)", "REV - Valve with reverse seat - for back to back installation", "L1 - Less shower head", "15 - 1.5 gpm (5.7 L/min) flow restrictor", "C - Caked on soap dish".

Dimensions

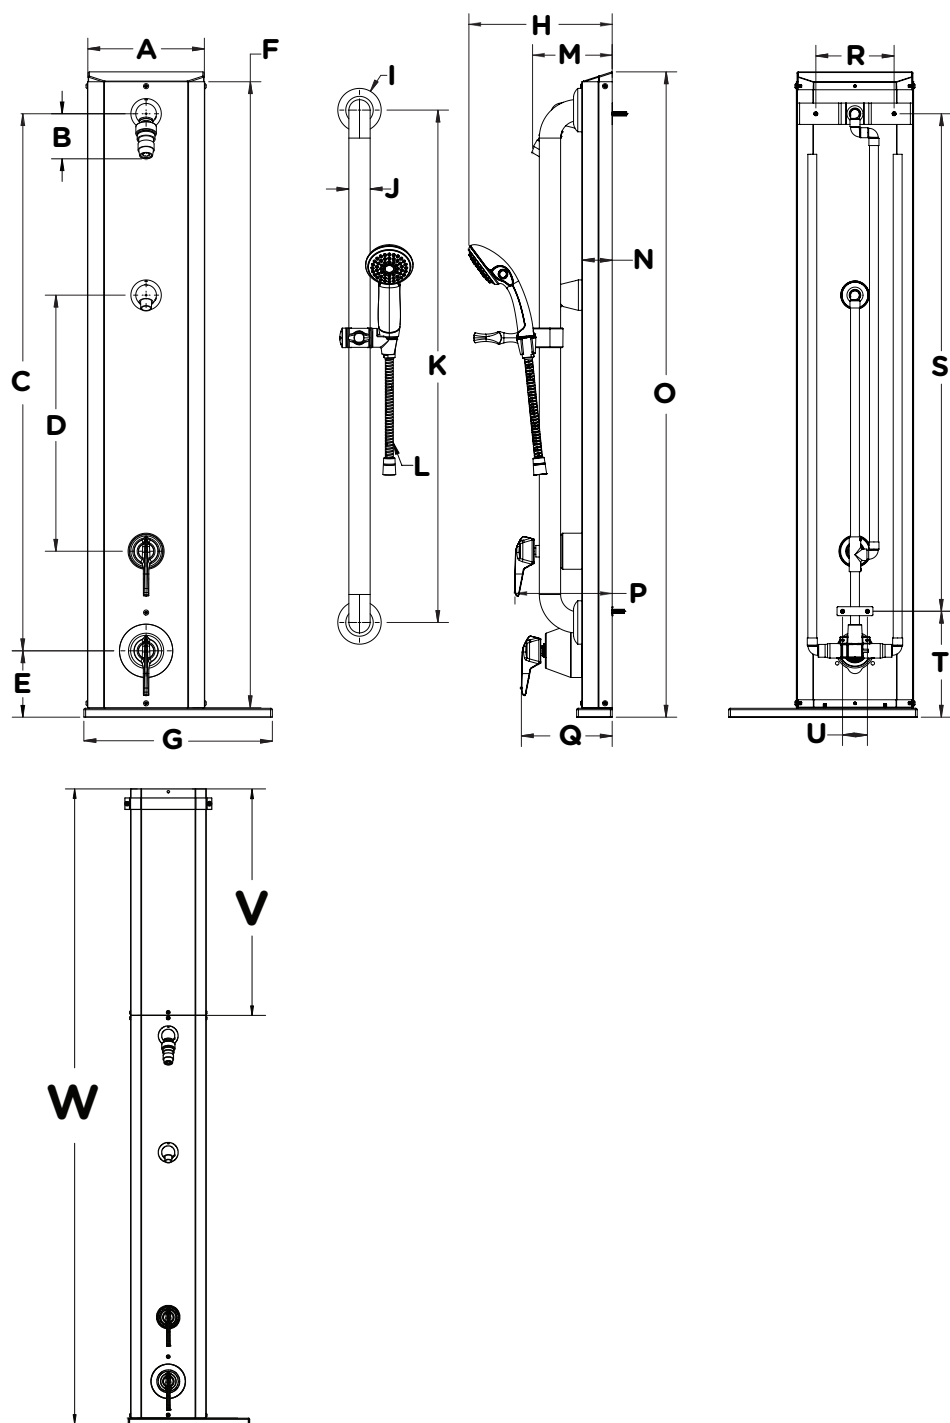

Measurements	
A	8-3/16", 208 mm
B	3-3/16", 80 mm
C	37 3/4" 959mm
D	18" 457mm
E	4 11/16" 118mm
F	44" 1118mm
G	13-1/4", 337 mm
H	10 1/16" 256mm
I	3 1/16" 78mm
J	1 1/2" 38mm
K	36" 915mm
L	60" HOSE
M	5 5/8" 142mm
N	2 1/8" 53mm
O	36" 915mm
P	6 13/16" 174mm
Q	6 3/8" 162mm
R	5 1/2" 140mm
S	35" 888mm
T	7 7/16" 189mm
U	1 3/4" 44mm
V	PER DRAWING
W	PER DRAWING

Note: Dimensions V and W for H904S only.