




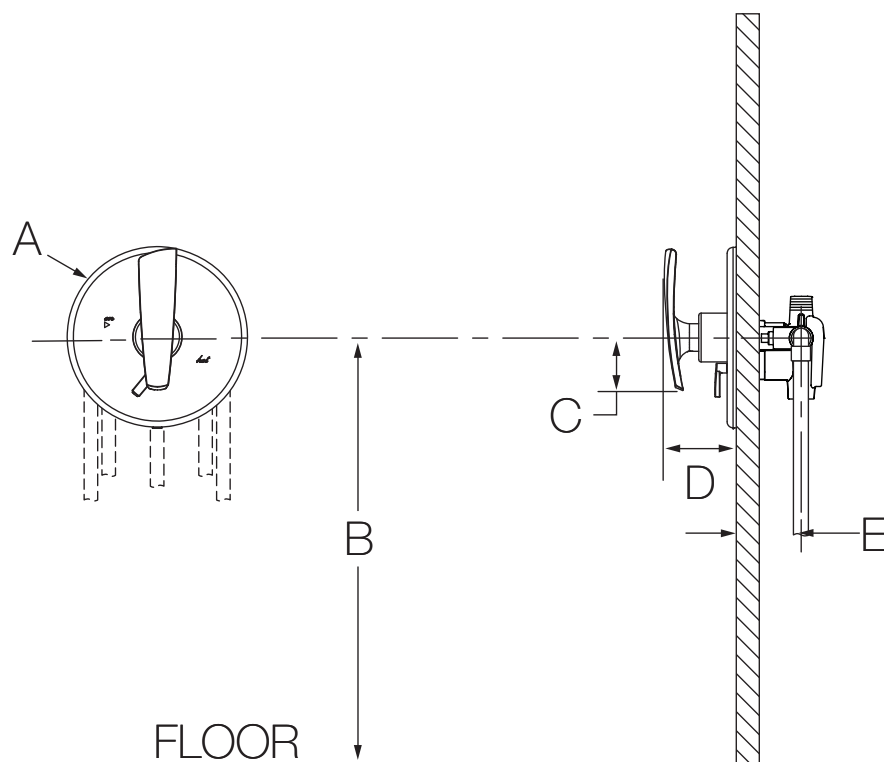
Location:

S-4100-TRM, S4100TRMTC
Shower Valve Trim
Specification Submittal



Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> Naru Shower Valve Trim Requires Temptrol® Pressure Balancing Shower Valve Integral volume control Metal lever handle Showerhead not included Tub spout not included Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n S4100TRMTC) 	<div> <input type="checkbox"/> -PNL <i>Polished Nickel finish</i> </div> <div> <input type="checkbox"/> -STN <i>Satin Nickel finish</i> </div> <p>Note: Append appropriate -suffix to model number.</p>
Model Numbers	
<div> <input type="checkbox"/> S-4100-TRM Shower Valve Trim with integral volume control, Temptrol Pressure Balancing Shower Valve ordered separately </div> <div> <input type="checkbox"/> S4100TRMTC Shower Valve Trim with integral volume control, TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap </div>	
Compliance	
<ul style="list-style-type: none"> ASME A112.18.1/CSA B125.1 	
Warranty	
<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>5 Years - for industrial/commercial installations.</p> <p>Refer to www.symmons.com/warranty for complete warranty information.</p> <p>Go to www.symmons.com/register to register your Symmons product.</p>	

Dimensions



Measurements	
A	Ø 7-1/2", 191 mm
B	Ref. 42", 1067 mm
C	2-1/4", 57 mm
D	3", 76 mm
E	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see E as reference).
- 4) Dimensions subject to change without notice.